



LED



Norms: EN 60598-1, EN 60598-2-2



PRODUCT DESCRIPTION

Areas of Application: Industrial areas, commercial areas.

Mounting: Ceiling recessed.

Light Distribution: Direct.

Light Source: LED 4000K, CRI >80, 50.000h life.

Control Gear: LED driver, 220-240VAC-50/60Hz.


Wiring: Monophasic.

Materials: Body: Steel sheet.
Diffuser: Opal PMMA diffuser.


Surface Finish: Powder coated in white matt (RAL9016).

Fixing system: Brackets.

ACM - Symmetric reflector with opal diffuser

LED	W	Lm	Lm/W	η(%)	AxBxC (mm)	B1 (mm)	f	K1	K3	Kg	HF	DALI
	1x19	2730	106	83	614x149x107	128	594x130	-	-	2,3	9Z2Z.119.6Y.F4	9Z2Z.119.6Y.E4
	1x39	5460	108	85	1174x149x107	128	1154x130	-	-	4,4	9Z2Z.139.6Y.F4	9Z2Z.139.6Y.E4
	1x58	8190	108	85	1734x149x107	128	1714x130	•	•	6,4	9Z2Z.158.6Y.F4	9Z2Z.158.6Y.E4

AWM - Asymmetric reflector with opal diffuser


LED	W	Lm	Lm/W	η(%)	AxBxC (mm)	B1 (mm)	f	K1	K3	Kg	HF	DALI
	1x19	2730	103	81	602x149x107	128	594x130	-	-	2,4	9Z2Z.119.8C.F4	9Z2Z.119.8C.E4
	1x39	5460	102	80	1162x149x107	128	1154x130	-	-	4,5	9Z2Z.139.8C.F4	9Z2Z.139.8C.E4
	1x58	8190	101	79	1722x149x107	128	1714x130	•	•	6,5	9Z2Z.158.8C.F4	9Z2Z.158.8C.E4

OPTIONS

Colour temperature

	3000K	Order code 3000
--	-------	---------------------------

Emergency unit

	Emergency unit 3 hours Emergency unit 1 hour	Order code K3 K1
• Only available for 58w version.		

Example code for order: 9Z2Z.158.6Y.F4 (HF) + 3000 + K3 (OPTIONS)

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

DETAILS



Asymmetric detail







LED detail




Bracket detail

PHOTOMETRY

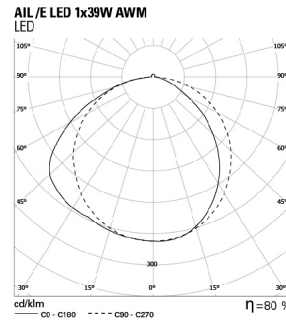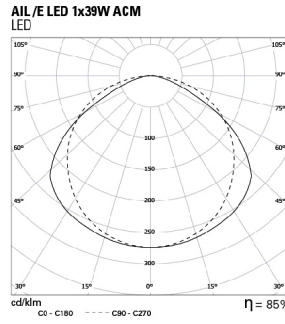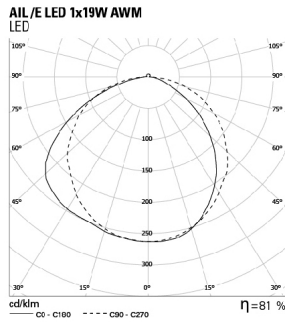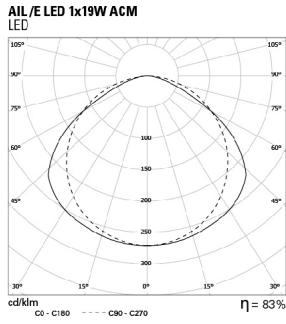

DIMENSIONS

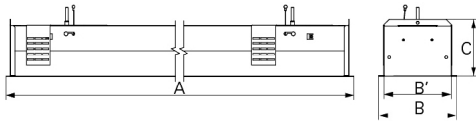

TO SPECIFY:

Recessed single mounted LED luminaire with symmetric/asymmetric version and opal PMMA diffuser. Total luminous flux of 2730/5460/8190 lm version and integral HF/DALI LED driver. Optional 1 or 3 hours emergency available - as Roxo Lighting AIL/E LED.