



**LED**

Norms: EN 60598-1, EN 60598-2-1



### PRODUCT DESCRIPTION

**Areas of Application:** Industrial areas, commercial areas.

**Mounting:** Surface.

**Light Distribution:** Direct.

**Light Source:** LED 4000K, CRI>80, 65.000h life (@L90, B10, Ta 25 C).

**Optical System:** Diffuser: Polycarbonate.

**Control Gear:** LED driver, 220-240VAC-50/60Hz.


**Materials:** Body: Steel sheet.

**Surface Finish:** Powder coated.

DPT - Transparent polycarbonate diffuser

LAMP	W	lm	lm/W	η(%)	AxBxC (mm)	K1	K3	kg	HF	DALI
LED	15	1610	104	94	561x52x49	-	-	0,7	907Q.015.00.F4	907Q.015.00.E4
	26	3220	120	97	1121x52x49	•	•	1,4	907Q.026.00.F4	907Q.026.00.E4
	31	4025	123	95	1401x52x49	•	•	1,6	907Q.031.00.F4	907Q.031.00.E4

### DIMENSIONS

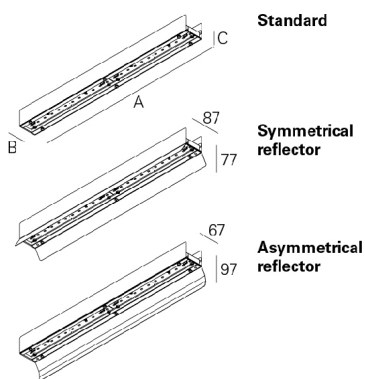


Example code for order: 907Q.031.00.E4 (DALI) + 3000 + 9486 + 926100 + K3 (OPTIONS)

We reserve the right to make technical changes without prior notice.  
Electrical/Optical data are subjected to a tolerance of +/-10%.

### OPTIONS

#### Colour temperature



3000K

Order code  
**3000**


#### Reflector



Symmetric  
Asymmetric

Order code  
**9806**  
**9805**

#### Through-wiring



1,5mm<sup>2</sup> through-wiring  
3 x 1,5 mm<sup>2</sup>  
5 x 1,5 mm<sup>2</sup>  
7 x 1,5 mm<sup>2</sup>  
9 x 1,5 mm<sup>2</sup>  
2,5mm<sup>2</sup> through-wiring  
3 x 2,5 mm<sup>2</sup>  
5 x 2,5 mm<sup>2</sup>  
7 x 2,5 mm<sup>2</sup>  
9 x 2,5 mm<sup>2</sup>

Order code  
**9456**  
**9457**  
**9460**  
**9486**  
**9458**  
**9459**  
**9461**  
**9487**

#### Mounting KIT



Surface mounting KIT

• Fixing holes for M4x8 DIN7985.

Order code  
**926100**

#### Emergency unit




Emergency unit 3 hours  
Emergency unit 1 hour


Order code  
**K3**  
**K1**

• Test function by telecommand signal.

### PHOTOMETRY



AVL LED 15W 4000K



AVL LED 26W 4000K

#### TO SPECIFY:

Surface LED batten for cove lighting with symmetric/ asymmetric version and transparent polycarbonate diffuser. Standard version with 4000K, CRI>80 and 65.000h lifetime (@ L80, B10, Ta 25 C). Optional 3000K, DALI dimmable versions and 1 or 3 hours emergency unit. – as Indelague AVL LED.

We reserve the right to make technical changes without prior notice.  
Electrical/Optical data are subjected to a tolerance of +/-10%.