



LED

Norms: EN 60598-1, EN 60598-2-1



PRODUCT DESCRIPTION

Areas of Application: Industrial areas, commercial areas.

Mounting: Surface.

Light Distribution: Direct.

Light Source: LED 4000K, CRI>80, 65.000h life (@L90, B10, Ta 25 C).

Optical System: Diffuser: Polycarbonate.

Control Gear: LED driver, 220-240VAC-50/60Hz.


Materials: Body: Steel sheet.

Surface Finish: Powder coated.

DPT - Transparent polycarbonate diffuser

LAMP	W	lm	lm/W	η(%)	AxBxC (mm)	K1	K3	kg	HF	DALI
LED	15	1610	104	94	561x52x49	-	-	0,7	907Q.015.00.F4	907Q.015.00.E4
	26	3220	120	97	1121x52x49	•	•	1,4	907Q.026.00.F4	907Q.026.00.E4
	31	4025	123	95	1401x52x49	•	•	1,6	907Q.031.00.F4	907Q.031.00.E4

DIMENSIONS

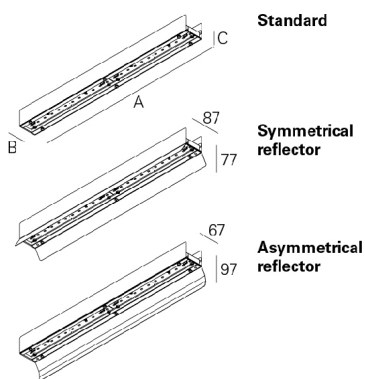


Example code for order: 907Q.031.00.E4 (DALI) + 3000 + 9486 + 926100 + K3 (OPTIONS)

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

OPTIONS

Colour temperature



3000K

Order code
3000


Reflector



Symmetric
Asymmetric

Order code
9806
9805

Through-wiring



1,5mm² through-wiring
3 x 1,5 mm²
5 x 1,5 mm²
7 x 1,5 mm²
9 x 1,5 mm²
2,5mm² through-wiring
3 x 2,5 mm²
5 x 2,5 mm²
7 x 2,5 mm²
9 x 2,5 mm²

Order code
9456
9457
9460
9486
9458
9459
9461
9487

Mounting KIT



Surface mounting KIT

• Fixing holes for M4x8 DIN7985.

Order code
926100

Emergency unit





Emergency unit 3 hours
Emergency unit 1 hour

Order code
K3
K1

• Test function by telecommand signal.

PHOTOMETRY



TO SPECIFY:

Surface LED batten for cove lighting with symmetric/ asymmetric version and transparent polycarbonate diffuser. Standard version with 4000K, CRI>80 and 65.000h lifetime (@ L80, B10, Ta 25 C). Optional 3000K, DALI dimmable versions and 1 or 3 hours emergency unit. – as Roxo Lighting AVL LED.