


AVT

p.1/2

RECESSED



IEC 60598-1 | EN 60598-2-2 | EN 60598-2-25

Application areas:

Hospitals; Restaurant and Hotel services; Cleanrooms.

Mounting:

Recessed.

Light distribution:

Direct.

Light source:

Linear fluorescent tubes (T5).

Optical system:

PBT- Polish double parabolic louvre iridescence free with tempered glass.
 PMT- Satin double parabolic louvre with tempered glass.
 PBP- Polish double parabolic louvre iridescence free with transparente polycarbonate diffuser.
 PMP- Satin double parabolic louvre with transparente polycarbonate diffuser.
 DOP – Opal polycarbonate diffuser.
 DAM – Microprismatic diffuser.

Wiring:

Equipped with high frequency ballast and push wire terminals.
 > Under request:
 - Dimmable control gear (1...10V/DSI/DALI).

Materials:

Body: Steel sheet.
 Parabolic louvre: satin/polished aluminium

Finishing:

Body: White (RAL9016).

Optional:

-1/3hr Emergency unit

To specify:

Healthcare/ Cleanroom IP65 recessed luminaire, suitable for linear fluorescent tubes (T5) and with diferente diffusers and louvres available. Dimmable version under request and 1/3hr Emergency Unit as optional. Luminária de encastrar IP65 – as INDELAGUE AVT.

Type:

PBT - Polish double parabolic louvre iridescence free with tempered glass

LAMP*	W	AxBxC (mm)	A'	B'	
T5	2x28	1197x297x78	1174	274	1176x276
	2x35	1497x297x78	1474	274	1476x276
	2x49	1497x297x78	1474	274	1476x276
	2x54	1197x297x78	1174	274	1176x276
	2x80	1497x297x78	1474	274	1476x276
	3x14	597x597x78	574	574	576x576
	3x24	597x597x78	574	574	576x576
	4x14	597x597x78	574	574	576x576
	4x24	597x597x78	574	574	576x576

PMT - Satin double parabolic louvre with tempered glass

LAMP*	W	AxBxC (mm)	A'	B'	
T5	2x28	1197x297x78	1174	274	1176x276
	2x35	1497x297x78	1474	274	1476x276
	2x49	1497x297x78	1474	274	1476x276
	2x54	1197x297x78	1174	274	1176x276
	2x80	1497x297x78	1474	274	1476x276
	3x14	597x597x78	574	574	576x576
	3x24	597x597x78	574	574	576x576
	4x14	597x597x78	574	574	576x576
	4x24	597x597x78	574	574	576x576

PBP - Polish double parabolic louvre iridescence free with transparent polycarbonate diffuser

LAMP*	W	AxBxC (mm)	A'	B'	
T5	2x28	1197x297x78	1174	274	1176x276
	2x35	1497x297x78	1474	274	1476x276
	2x49	1497x297x78	1474	274	1476x276
	2x54	1197x297x78	1174	274	1176x276
	2x80	1497x297x78	1474	274	1476x276
	3x14	597x597x78	574	574	576x576
	3x24	597x597x78	574	574	576x576
	4x14	597x597x78	574	574	576x576
	4x24	597x597x78	574	574	576x576

Continued on page 2

PMP - Satin double parabolic louvre with transparent polycarbonate diffuser

LAMP*	W	AxBxC (mm)	A'	B'	
T5	2x28	1197x297x78	1174	274	1176x276
	2x35	1497x297x78	1474	274	1476x276
	2x49	1497x297x78	1474	274	1476x276
	2x54	1197x297x78	1174	274	1176x276
	2x80	1497x297x78	1474	274	1476x276
	3x14	597x597x78	574	574	576x576
	3x24	597x597x78	574	574	576x576
	4x14	597x597x78	574	574	576x576
	4x24	597x597x78	574	574	576x576

DOP - Opal polycarbonate diffuser


LAMP*	W	AxBxC (mm)	A'	B'	
T5	2x28	1197x297x78	1174	274	1176x276
	2x35	1497x297x78	1474	274	1476x276
	2x49	1497x297x78	1474	274	1476x276
	2x54	1197x297x78	1174	274	1176x276
	2x80	1497x297x78	1474	274	1476x276
	3x14	597x597x78	574	574	576x576
	3x24	597x597x78	574	574	576x576
	4x14	597x597x78	574	574	576x576
	4x24	597x597x78	574	574	576x576

DAM - Microprismatic diffuser

LAMP*	W	AxBxC (mm)	A'	B'	
T5	2x28	1197x297x78	1174	274	1176x276
	2x35	1497x297x78	1474	274	1476x276
	2x49	1497x297x78	1474	274	1476x276
	2x54	1197x297x78	1174	274	1176x276
	2x80	1497x297x78	1474	274	1476x276
	3x14	597x597x78	574	574	576x576
	3x24	597x597x78	574	574	576x576
	4x14	597x597x78	574	574	576x576
	4x24	597x597x78	574	574	576x576


* Lamps not included

Dimensions:

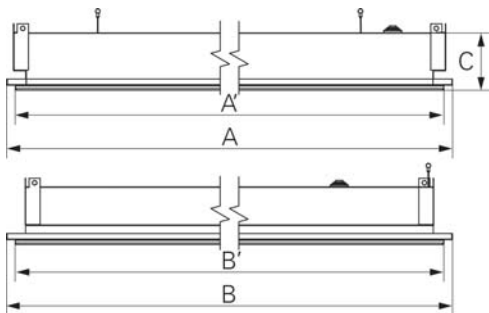


Photometry:

AVT 3x14 PBT
Lamp: 3 x FH 14W/840 HE

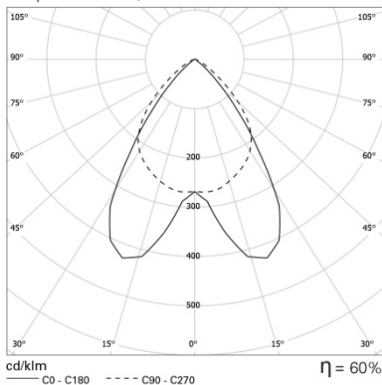

AVT 4x14 DOP
Lamp: 4 x FH 14W/840 HE

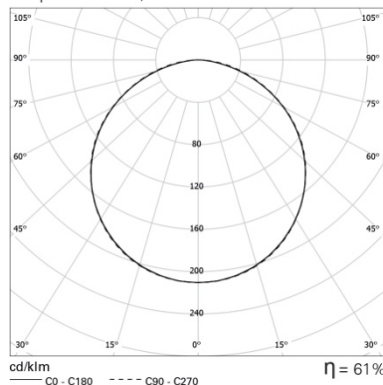

AVT

p.2/2

RECESSED

Details:



Bezel's fixing system


Fixing system (lay-in)



PBT

PMT

PMP



PBP

DOP

DAM