

AVT LED

p.1/1

RECESSED

LED



IEC 60598-1 | EN 60598-2-2 | EN 60598-2-25

Application areas:

Hospitals; Restaurant and Hotel services;
Cleanrooms.

Mounting:

Recessed.

Light distribution:

Direct.

Light source:

LED - 4000K.

Optical system:

DOZ – Opal polycarbonate diffuser (LED).
DAM –Microprismatic diffuser

Wiring:

Equipped with LED driver and push wire
terminals.

> Under request:

-dimmable version (switchDIM, DSI or DALI).

Materials:

Body: Steel sheet.

Finishing:

White (RAL9016).


Optional:

-Colour temperature 3000K.
- 1/3h Emergency Unit

To specify:

Healthcare/cleanroom LED IP 65 recessed
luminaire, with opal polycarbonate or
microprismatic diffuser. Colour temperature
3000k and 1/3h Emergency unit as optional –
as INDELAGUE AVT LED.

Details:



Bezel

Type:

DOZ - Opal polycarbonate diffuser


LAMP*	W	Lm	η(%)	AxBxC (mm)	A'xB' (mm)	
LED	4x12	5800	77	597x597x118	574x574	576x576
	4x12	5800	73	1197x297x118	1174x274	1176x276

DAM - Microprismatic diffuser

LAMP*	W	Lm	η(%)	AxBxC (mm)	A'xB' (mm)	
LED	4x12	5800	78	597x597x118	574x574	576x576
	4x12	5800	74	1197x297x118	1174x274	1176x276


* LED included

Dimensions:

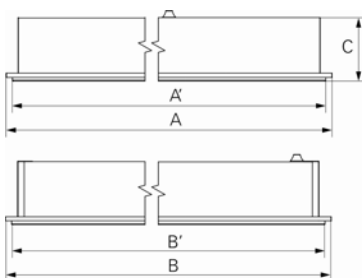


Photometry:

AVT LED 4x12 DOZ (597x597 mm)
Lamp: LED



AVT LED 4x12 DAM (597x597 mm)
Lamp: LED



INDELAGUE SA

Rua da Mina 465 | Covão | Zona industrial EN1 Norte | Apartado 106 / 3754-909 | 3750-792 Trofa | ÁGUEDA - PORTUGAL
Telefone:(+351)234 612 310 | Fax:(+351)234 624 058 / (+351)234 612 319 (Encomendas/Orders)
indelage@indelage.pt | www.indelage.com