



Norms: EN 60598-1, EN 60598-2-1



PRODUCT DESCRIPTION

Areas of Application: Industrial areas, commercial areas.

Mounting: Surface/Suspended.

Light Distribution: Direct.

Control Gear: Electronic equipment, 220-240VAC-50/60Hz.

Wiring: Pre-wired with 1m long H05-FVV cable.

Materials: Body: Steel sheet.
Frame: Extruded aluminium only for IP54 and IP65 versions.

Surface Finish: Powder coated in white matt (RAL9016).

IP20 | PB - Polished aluminium reflector




LAMP*	W	Lm/W	η(%)	AxBxC (mm)	HF	DSI	DALI
T5	2x28	84	97	1200x265x85	9G12.228.22.A4.0290	9G12.228.22.84.0290	9G12.228.22.74.0290
	2x35	83	96	1500x265x85	9G12.235.22.A4.0290	9G12.235.22.84.0290	9G12.235.22.74.0290
	2x49	78	96	1500x265x85	9G12.249.22.A4.0290	9G12.249.22.84.0290	9G12.249.22.74.0290
	2x54	74	95	1200x265x85	9G12.254.22.A4.0290	9G12.254.22.84.0290	9G12.254.22.74.0290
	2x80	69	96	1500x265x85	9G12.280.22.A4.0290	9G12.280.22.84.0290	9G12.280.22.74.0290
	4x28	83	96	1200x465x85	9G12.428.22.A4.0290	9G12.428.22.84.0290	9G12.428.22.74.0290
	4x35	83	96	1500x465x85	9G12.435.22.A4.0290	9G12.435.22.84.0290	9G12.435.22.74.0290
	4x49	77	95	1500x465x85	9G12.449.22.A4.0290	9G12.449.22.84.0290	9G12.449.22.74.0290
	4x54	74	95	1200x465x85	9G12.454.22.A4.0290	9G12.454.22.84.0290	9G12.454.22.74.0290
	4x80	69	96	1500x465x85	9G12.480.22.A4.0290	9G12.480.22.84.0290	9G12.480.22.74.0290
	6x28	83	96	1200x665x85	9G12.628.22.A4.0290	9G12.628.22.84.0290	9G12.628.22.74.0290
	6x35	84	96	1500x665x85	9G12.635.22.A4.0290	9G12.635.22.84.0290	9G12.635.22.74.0290
	6x49	78	96	1500x665x85	9G12.649.22.A4.0290	9G12.649.22.84.0290	9G12.649.22.74.0290
	6x54	74	95	1200x665x85	9G12.654.22.A4.0290	9G12.654.22.84.0290	9G12.654.22.74.0290
	6x80	70	97	1500x665x85	9G12.680.22.A4.0290	9G12.680.22.84.0290	9G12.680.22.74.0290


* Lamp not included.
Example code for order: 9G12.680.26.74.0000 (DALI) + W5MFDC (OPTIONS)

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.


IP20 | PQ - High efficiency polished aluminium reflector

 LAMP*	W	Lm/W	η(%)	AxBxC (mm)	HF	DSI	DALI
T5	2x28	86	99	1200x265x85	9G12.228.26.A4.0290	9G12.228.26.84.0290	9G12.228.26.74.0290
	2x35	86	99	1500x265x85	9G12.235.26.A4.0290	9G12.235.26.84.0290	9G12.235.26.74.0290
	2x49	80	98	1500x265x85	9G12.249.26.A4.0290	9G12.249.26.84.0290	9G12.249.26.74.0290
	2x54	77	98	1200x265x85	9G12.254.26.A4.0290	9G12.254.26.84.0290	9G12.254.26.74.0290
	2x80	71	99	1500x265x85	9G12.280.26.A4.0290	9G12.280.26.84.0290	9G12.280.26.74.0290
	4x28	86	99	1200x465x85	9G12.428.26.A4.0290	9G12.428.26.84.0290	9G12.428.26.74.0290
	4x35	85	98	1500x465x85	9G12.435.26.A4.0290	9G12.435.26.84.0290	9G12.435.26.74.0290
	4x49	79	98	1500x465x85	9G12.449.26.A4.0290	9G12.449.26.84.0290	9G12.449.26.74.0290
	4x54	76	97	1200x465x85	9G12.454.26.A4.0290	9G12.454.26.84.0290	9G12.454.26.74.0290
	4x80	71	99	1500x465x85	9G12.480.26.A4.0290	9G12.480.26.84.0290	9G12.480.26.74.0290
	6x28	85	99	1200x665x85	9G12.628.26.A4.0290	9G12.628.26.84.0290	9G12.628.26.74.0290
	6x35	86	98	1500x665x85	9G12.635.26.A4.0290	9G12.635.26.84.0290	9G12.635.26.74.0290
	6x49	80	98	1500x665x85	9G12.649.26.A4.0290	9G12.649.26.84.0290	9G12.649.26.74.0290
	6x54	77	98	1200x665x85	9G12.654.26.A4.0290	9G12.654.26.84.0290	9G12.654.26.74.0290
	6x80	72	99	1500x665x85	9G12.680.26.A4.0290	9G12.680.26.84.0290	9G12.680.26.74.0290

IP54 | DP0 - Polished aluminium reflector with transparent polycarbonate diffuser


 LAMP*	W	Lm/W	η(%)	A1xB1xC1 (mm)	HF	DSI	DALI
T5	2x28	67	78	1200x265x92	9G12.228.22.A4.0050	9G12.228.22.84.0050	9G12.228.22.74.0050
	2x35	71	82	1500x265x92	9G12.235.22.A4.0050	9G12.235.22.84.0050	9G12.235.22.74.0050
	2x49	64	79	1500x265x92	9G12.249.22.A4.0050	9G12.249.22.84.0050	9G12.249.22.74.0050
	2x54	58	75	1200x265x92	9G12.254.22.A4.0050	9G12.254.22.84.0050	9G12.254.22.74.0050
	2x80	59	82	1500x265x92	9G12.280.22.A4.0050	9G12.280.22.84.0050	9G12.280.22.74.0050
	4x28	69	79	1200x465x92	9G12.428.22.A4.0050	9G12.428.22.84.0050	9G12.428.22.74.0050
	4x35	73	84	1500x465x92	9G12.435.22.A4.0050	9G12.435.22.84.0050	9G12.435.22.74.0050
	4x49	67	83	1500x465x92	9G12.449.22.A4.0050	9G12.449.22.84.0050	9G12.449.22.74.0050
	4x54	60	77	1200x465x92	9G12.454.22.A4.0050	9G12.454.22.84.0050	9G12.454.22.74.0050
	4x80	61	85	1500x465x92	9G12.480.22.A4.0050	9G12.480.22.84.0050	9G12.480.22.74.0050
	6x28	69	80	1200x665x92	9G12.628.22.A4.0050	9G12.628.22.84.0050	9G12.628.22.74.0050
	6x35	74	85	1500x665x92	9G12.635.22.A4.0050	9G12.635.22.84.0050	9G12.635.22.74.0050
	6x49	66	81	1500x665x92	9G12.649.22.A4.0050	9G12.649.22.84.0050	9G12.649.22.74.0050
	6x54	60	77	1200x665x92	9G12.654.22.A4.0050	9G12.654.22.84.0050	9G12.654.22.74.0050
	6x80	60	84	1500x665x92	9G12.680.22.A4.0050	9G12.680.22.84.0050	9G12.680.22.74.0050

IP54 | VP0 - Polished aluminium reflector with transparent tempered glass


 LAMP*	W	Lm/W	η(%)	A1xB1xC1 (mm)	HF	DSI	DALI
T5	2x28	67	78	1200x265x92	9G12.228.11.A4.0050	9G12.228.11.84.0050	9G12.228.11.74.0050
	2x35	71	82	1500x265x92	9G12.235.11.A4.0050	9G12.235.11.84.0050	9G12.235.11.74.0050
	2x49	64	79	1500x265x92	9G12.249.11.A4.0050	9G12.249.11.84.0050	9G12.249.11.74.0050
	2x54	58	77	1200x265x92	9G12.254.11.A4.0050	9G12.254.11.84.0050	9G12.254.11.74.0050
	2x80	59	82	1500x265x92	9G12.280.11.A4.0050	9G12.280.11.84.0050	9G12.280.11.74.0050
	4x28	69	79	1200x465x92	9G12.428.11.A4.0050	9G12.428.11.84.0050	9G12.428.11.74.0050
	4x35	73	84	1500x465x92	9G12.435.11.A4.0050	9G12.435.11.84.0050	9G12.435.11.74.0050
	4x49	67	83	1500x465x92	9G12.449.11.A4.0050	9G12.449.11.84.0050	9G12.449.11.74.0050
	4x54	60	77	1200x465x92	9G12.454.11.A4.0050	9G12.454.11.84.0050	9G12.454.11.74.0050
	4x80	61	85	1500x465x92	9G12.480.11.A4.0050	9G12.480.11.84.0050	9G12.480.11.74.0050
	6x28	69	80	1200x665x92	9G12.628.11.A4.0050	9G12.628.11.84.0050	9G12.628.11.74.0050
	6x35	74	85	1500x665x92	9G12.635.11.A4.0050	9G12.635.11.84.0050	9G12.635.11.74.0050
	6x49	66	81	1500x665x92	9G12.649.11.A4.0050	9G12.649.11.84.0050	9G12.649.11.74.0050
	6x54	60	77	1200x665x92	9G12.654.11.A4.0050	9G12.654.11.84.0050	9G12.654.11.74.0050
	6x80	60	97	1500x665x92	9G12.680.11.A4.0050	9G12.680.11.84.0050	9G12.680.11.74.0050

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.


IP54 | DPQ - High efficiency polished aluminium reflector with transparent polycarbonate diffuser

 LAMP*	W	Lm/W	η(%)	A1xB1xC1 (mm)	HF	DSI	DALI
T5	2x28	74	86	1200x265x92	9G12.228.26.A4.0050	9G12.228.26.84.0050	9G12.228.26.74.0050
	2x35	77	89	1500x265x92	9G12.235.26.A4.0050	9G12.235.26.84.0050	9G12.235.26.74.0050
	2x49	70	86	1500x265x92	9G12.249.26.A4.0050	9G12.249.26.84.0050	9G12.249.26.74.0050
	2x54	64	82	1200x265x92	9G12.254.26.A4.0050	9G12.254.26.84.0050	9G12.254.26.74.0050
	2x80	65	90	1500x265x92	9G12.280.26.A4.0050	9G12.280.26.84.0050	9G12.280.26.74.0050
	4x28	75	87	1200x465x92	9G12.428.26.A4.0050	9G12.428.26.84.0050	9G12.428.26.74.0050
	4x35	80	92	1500x465x92	9G12.435.26.A4.0050	9G12.435.26.84.0050	9G12.435.26.74.0050
	4x49	74	91	1500x465x92	9G12.449.26.A4.0050	9G12.449.26.84.0050	9G12.449.26.74.0050
	4x54	66	84	1200x465x92	9G12.454.26.A4.0050	9G12.454.26.84.0050	9G12.454.26.74.0050
	4x80	66	92	1500x465x92	9G12.480.26.A4.0050	9G12.480.26.84.0050	9G12.480.26.74.0050
	6x28	78	90	1200x665x92	9G12.628.26.A4.0050	9G12.628.26.84.0050	9G12.628.26.74.0050
	6x35	80	92	1500x665x92	9G12.635.26.A4.0050	9G12.635.26.84.0050	9G12.635.26.74.0050
	6x49	72	89	1500x665x92	9G12.649.26.A4.0050	9G12.649.26.84.0050	9G12.649.26.74.0050
	6x54	68	86	1200x665x92	9G12.654.26.A4.0050	9G12.654.26.84.0050	9G12.654.26.74.0050
	6x80	67	93	1500x665x92	9G12.680.26.A4.0050	9G12.680.26.84.0050	9G12.680.26.74.0050

IP54 | VPQ - High efficiency polished aluminium reflector with transparent tempered glass


 LAMP*	W	Lm/W	η(%)	A1xB1xC1 (mm)	HF	DSI	DALI
T5	2x28	74	86	1200x265x92	9G12.228.1J.A4.0050	9G12.228.1J.84.0050	9G12.228.1J.74.0050
	2x35	77	89	1500x265x92	9G12.235.1J.A4.0050	9G12.235.1J.84.0050	9G12.235.1J.74.0050
	2x49	70	86	1500x265x92	9G12.249.1J.A4.0050	9G12.249.1J.84.0050	9G12.249.1J.74.0050
	2x54	64	84	1200x265x92	9G12.254.1J.A4.0050	9G12.254.1J.84.0050	9G12.254.1J.74.0050
	2x80	65	90	1500x265x92	9G12.280.1J.A4.0050	9G12.280.1J.84.0050	9G12.280.1J.74.0050
	4x28	75	87	1200x465x92	9G12.428.1J.A4.0050	9G12.428.1J.84.0050	9G12.428.1J.74.0050
	4x35	77	92	1500x465x92	9G12.435.1J.A4.0050	9G12.435.1J.84.0050	9G12.435.1J.74.0050
	4x49	74	91	1500x465x92	9G12.449.1J.A4.0050	9G12.449.1J.84.0050	9G12.449.1J.74.0050
	4x54	66	84	1200x465x92	9G12.454.1J.A4.0050	9G12.454.1J.84.0050	9G12.454.1J.74.0050
	4x80	66	92	1500x465x92	9G12.480.1J.A4.0050	9G12.480.1J.84.0050	9G12.480.1J.74.0050
	6x28	78	90	1200x665x92	9G12.628.1J.A4.0050	9G12.628.1J.84.0050	9G12.628.1J.74.0050
	6x35	80	92	1500x665x92	9G12.635.1J.A4.0050	9G12.635.1J.84.0050	9G12.635.1J.74.0050
	6x49	72	89	1500x665x92	9G12.649.1J.A4.0050	9G12.649.1J.84.0050	9G12.649.1J.74.0050
	6x54	68	86	1200x665x92	9G12.654.1J.A4.0050	9G12.654.1J.84.0050	9G12.654.1J.74.0050
	6x80	67	93	1500x665x92	9G12.680.1J.A4.0050	9G12.680.1J.84.0050	9G12.680.1J.74.0050

IP65 | DP0 - Polished aluminium reflector with transparent polycarbonate diffuser


 LAMP*	W	Lm/W	η(%)	A1xB1xC1 (mm)	HF	DSI	DALI
T5	2x28	67	78	1200x265x92	9G12.228.22.A4.0000	9G12.228.22.84.0000	9G12.228.22.74.0000
	2x35	71	82	1500x265x92	9G12.235.22.A4.0000	9G12.235.22.84.0000	9G12.235.22.74.0000
	2x49	64	79	1500x265x92	9G12.249.22.A4.0000	9G12.249.22.84.0000	9G12.249.22.74.0000
	2x54	58	77	1200x265x92	9G12.254.22.A4.0000	9G12.254.22.84.0000	9G12.254.22.74.0000
	2x80	59	82	1500x265x92	9G12.280.22.A4.0000	9G12.280.22.84.0000	9G12.280.22.74.0000
	4x28	69	79	1200x465x92	9G12.428.22.A4.0000	9G12.428.22.84.0000	9G12.428.22.74.0000
	4x35	73	84	1500x465x92	9G12.435.22.A4.0000	9G12.435.22.84.0000	9G12.435.22.74.0000
	4x49	67	83	1500x465x92	9G12.449.22.A4.0000	9G12.449.22.84.0000	9G12.449.22.74.0000
	4x54	60	77	1200x465x92	9G12.454.22.A4.0000	9G12.454.22.84.0000	9G12.454.22.74.0000
	4x80	61	85	1500x465x92	9G12.480.22.A4.0000	9G12.480.22.84.0000	9G12.480.22.74.0000
	6x28	69	80	1200x665x92	9G12.628.22.A4.0000	9G12.628.22.84.0000	9G12.628.22.74.0000
	6x35	74	85	1500x665x92	9G12.635.22.A4.0000	9G12.635.22.84.0000	9G12.635.22.74.0000
	6x49	66	81	1500x665x92	9G12.649.22.A4.0000	9G12.649.22.84.0000	9G12.649.22.74.0000
	6x54	60	77	1200x665x92	9G12.654.22.A4.0000	9G12.654.22.84.0000	9G12.654.22.74.0000
	6x80	60	97	1500x665x92	9G12.680.22.A4.0000	9G12.680.22.84.0000	9G12.680.22.74.0000

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.


IP65 | VP0 - Polished aluminium reflector with transparent tempered glass

 LAMP*	W	Lm/W	η(%)	A1xB1xC1 (mm)	HF	DSI	DALI
T5	2x28	67	78	1200x265x92	9G12.228.11.A4.0000	9G12.228.11.84.0000	9G12.228.11.74.0000
	2x35	71	82	1500x265x92	9G12.235.11.A4.0000	9G12.235.11.84.0000	9G12.235.11.74.0000
	2x49	64	79	1500x265x92	9G12.249.11.A4.0000	9G12.249.11.84.0000	9G12.249.11.74.0000
	2x54	58	77	1200x265x92	9G12.254.11.A4.0000	9G12.254.11.84.0000	9G12.254.11.74.0000
	2x80	59	82	1500x265x92	9G12.280.11.A4.0000	9G12.280.11.84.0000	9G12.280.11.74.0000
	4x28	69	79	1200x465x92	9G12.428.11.A4.0000	9G12.428.11.84.0000	9G12.428.11.74.0000
	4x35	73	84	1500x465x92	9G12.435.11.A4.0000	9G12.435.11.84.0000	9G12.435.11.74.0000
	4x49	67	83	1500x465x92	9G12.449.11.A4.0000	9G12.449.11.84.0000	9G12.449.11.74.0000
	4x54	60	77	1200x465x92	9G12.454.11.A4.0000	9G12.454.11.84.0000	9G12.454.11.74.0000
	4x80	61	85	1500x465x92	9G12.480.11.A4.0000	9G12.480.11.84.0000	9G12.480.11.74.0000
	6x28	69	80	1200x665x92	9G12.628.11.A4.0000	9G12.628.11.84.0000	9G12.628.11.74.0000
	6x35	74	85	1500x665x92	9G12.635.11.A4.0000	9G12.635.11.84.0000	9G12.635.11.74.0000
	6x49	66	81	1500x665x92	9G12.649.11.A4.0000	9G12.649.11.84.0000	9G12.649.11.74.0000
	6x54	60	77	1200x665x92	9G12.654.11.A4.0000	9G12.654.11.84.0000	9G12.654.11.74.0000
	6x80	60	97	1500x665x92	9G12.680.11.A4.0000	9G12.680.11.84.0000	9G12.680.11.74.0000

IP65 | DPQ - High efficiency polished aluminium reflector with transparent polycarbonate diffuser

 LAMP*	W	Lm/W	η(%)	A1xB1xC1 (mm)	HF	DSI	DALI
T5	2x28	74	86	1200x265x92	9G12.228.26.A4.0000	9G12.228.26.84.0000	9G12.228.26.74.0000
	2x35	77	89	1500x265x92	9G12.235.26.A4.0000	9G12.235.26.84.0000	9G12.235.26.74.0000
	2x49	70	86	1500x265x92	9G12.249.26.A4.0000	9G12.249.26.84.0000	9G12.249.26.74.0000
	2x54	64	84	1200x265x92	9G12.254.26.A4.0000	9G12.254.26.84.0000	9G12.254.26.74.0000
	2x80	65	90	1500x265x92	9G12.280.26.A4.0000	9G12.280.26.84.0000	9G12.280.26.74.0000
	4x28	75	87	1200x465x92	9G12.428.26.A4.0000	9G12.428.26.84.0000	9G12.428.26.74.0000
	4x35	77	92	1500x465x92	9G12.435.26.A4.0000	9G12.435.26.84.0000	9G12.435.26.74.0000
	4x49	74	91	1500x465x92	9G12.449.26.A4.0000	9G12.449.26.84.0000	9G12.449.26.74.0000
	4x54	66	84	1200x465x92	9G12.454.26.A4.0000	9G12.454.26.84.0000	9G12.454.26.74.0000
	4x80	66	92	1500x465x92	9G12.480.26.A4.0000	9G12.480.26.84.0000	9G12.480.26.74.0000
	6x28	78	90	1200x665x92	9G12.628.26.A4.0000	9G12.628.26.84.0000	9G12.628.26.74.0000
	6x35	80	92	1500x665x92	9G12.635.26.A4.0000	9G12.635.26.84.0000	9G12.635.26.74.0000
	6x49	72	89	1500x665x92	9G12.649.26.A4.0000	9G12.649.26.84.0000	9G12.649.26.74.0000
	6x54	68	86	1200x665x92	9G12.654.26.A4.0000	9G12.654.26.84.0000	9G12.654.26.74.0000
	6x80	67	93	1500x665x92	9G12.680.26.A4.0000	9G12.680.26.84.0000	9G12.680.26.74.0000

IP65 | VPQ - High efficiency polished aluminium reflector with transparent tempered glass


 LAMP*	W	Lm/W	η(%)	A1xB1xC1 (mm)	HF	DSI	DALI
T5	2x28	74	86	1200x265x92	9G12.228.1J.A4.0000	9G12.228.1J.84.0000	9G12.228.1J.74.0000
	2x35	77	89	1500x265x92	9G12.235.1J.A4.0000	9G12.235.1J.84.0000	9G12.235.1J.74.0000
	2x49	70	86	1500x265x92	9G12.249.1J.A4.0000	9G12.249.1J.84.0000	9G12.249.1J.74.0000
	2x54	64	84	1200x265x92	9G12.254.1J.A4.0000	9G12.254.1J.84.0000	9G12.254.1J.74.0000
	2x80	65	90	1500x265x92	9G12.280.1J.A4.0000	9G12.280.1J.84.0000	9G12.280.1J.74.0000
	4x28	75	87	1200x465x92	9G12.428.1J.A4.0000	9G12.428.1J.84.0000	9G12.428.1J.74.0000
	4x35	77	92	1500x465x92	9G12.435.1J.A4.0000	9G12.435.1J.84.0000	9G12.435.1J.74.0000
	4x49	74	91	1500x465x92	9G12.449.1J.A4.0000	9G12.449.1J.84.0000	9G12.449.1J.74.0000
	4x54	66	84	1200x465x92	9G12.454.1J.A4.0000	9G12.454.1J.84.0000	9G12.454.1J.74.0000
	4x80	66	92	1500x465x92	9G12.480.1J.A4.0000	9G12.480.1J.84.0000	9G12.480.1J.74.0000
	6x28	78	90	1200x665x92	9G12.628.1J.A4.0000	9G12.628.1J.84.0000	9G12.628.1J.74.0000
	6x35	80	92	1500x665x92	9G12.635.1J.A4.0000	9G12.635.1J.84.0000	9G12.635.1J.74.0000
	6x49	72	89	1500x665x92	9G12.649.1J.A4.0000	9G12.649.1J.84.0000	9G12.649.1J.74.0000
	6x54	68	86	1200x665x92	9G12.654.1J.A4.0000	9G12.654.1J.84.0000	9G12.654.1J.74.0000
	6x80	67	93	1500x665x92	9G12.680.1J.A4.0000	9G12.680.1J.84.0000	9G12.680.1J.74.0000

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.


OPTIONS

Code	Description
W3MFC	Connector 3-pole wieland GST 18i3 male + 1m cable with 3-pole wieland GST 18i3 female.
W5MFC	Connector 5-pole wieland GST 18i5 male + 1m cable with 5-pole wieland GST 18i5 female.
W5MFC	Connector 5-pole wieland GST 18i5 DIM male + 1m cable with 5-pole wieland GST 18i5 DIM female.
--	Light and presence sensor.
K3	Emergency unit 3 hours
K1	Emergency unit 1 hour.
--	Lamps as optional.

DIMENSIONS

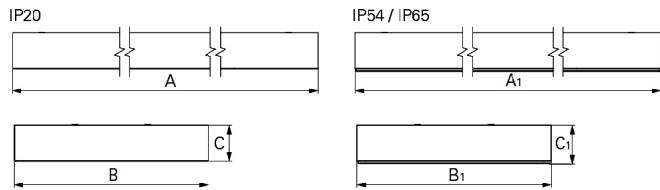


PHOTOMETRY

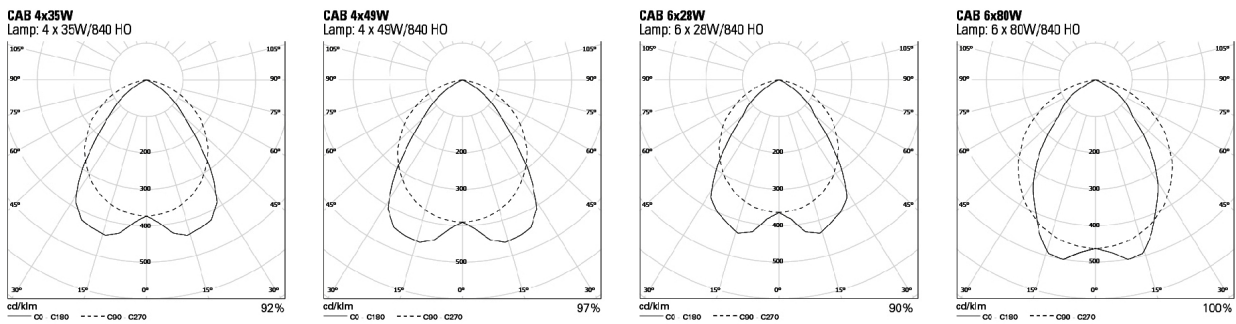

PERFORMANCE

HIE 400W

No. OF LUMINAIRES: 15
 SPACING: 30m x 20m
 REFLECTANCE: 20/70/50
 CEILING HEIGHT: 8m
 LAMPS: 400W HIE
 INICIAL ILLUMINANCE: 360 lux
 ILLUMINANCE AFTER 15000hrs: 252 lux




CAB

No. OF LUMINAIRES: 9
 SPACING: 30m x 20m
 REFLECTANCE: 20/70/50
 CEILING HEIGHT: 8m
 LAMPS: T5 6x80W
 INICIAL ILLUMINANCE: 414 lux
 ILLUMINANCE AFTER 15000hrs: 373 lux




Lumen Maintenance - T5 vs HIE

T5 fluorescent lamp has superior performance over life when compared with HIE lamp types.

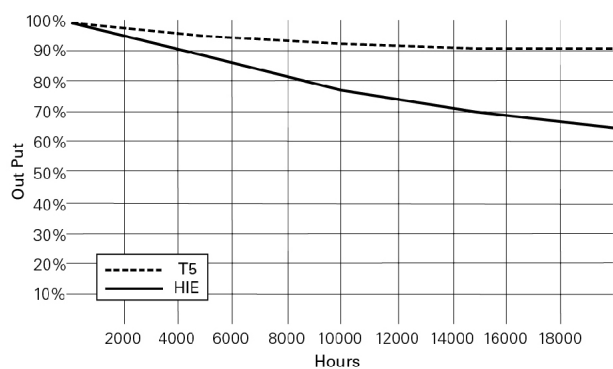

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

**RECOMMENDED HEIGHT FOR
LUMINAIRE APPLICATION**

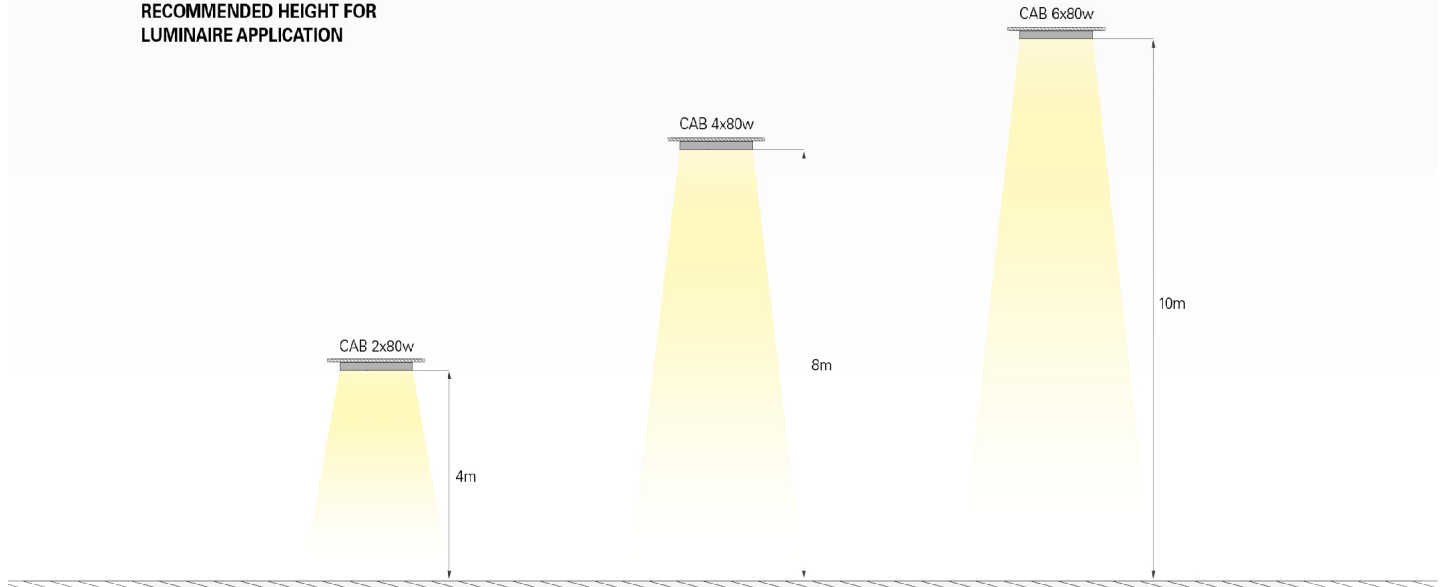

TO SPECIFY:

Surface or suspended high bay luminaire suitable for 2, 4 or 6x28/35/49/54/80W T5(G5) fluorescent lamps. Available in IP20, 54 or 65 versions. Reflector with high efficient aluminium and transparent glass or polycarbonate diffuser for heights up to 12 meters. Optional light or presence sensor and 1 or 3 hours emergency available – as Indelague CAB.

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.