



LED

Norms: EN 60598-1, EN 60598-2-1



PRODUCT DESCRIPTION

Areas of Application: Commercial and Business areas, Public buildings, Housing, Offices, Hotel and Restaurant services, Art and Culture spaces.

Mounting: Surface/Suspended.

Light Distribution: Direct.

Light Source: LED 4000K, CRI>80, 65.000h life (@L90, B10, Ta 25 C).

Optical System: Diffuser: Polycarbonate.

Control Gear: LED driver, 220-240VAC-50/60Hz.

Materials: Body: Extruded aluminium profile.

Surface Finish: Powder coated.

gCONTROL+ - Microprismatic polycarbonate diffuser PLUS

| | LAMP | UGR | W | lm | lm/W | η(%) | AxB (mm) | kg | HF | DALI |
|--|------|-----|-----|-------|------|------|----------|------|--------------|--------------|
| | LED | ≤16 | 39 | 5640 | 69 | 48 | Ø650x85 | 6,4 | 90363.L650.E | 90363.L650.H |
| | | ≤16 | 56 | 8460 | 73 | 48 | Ø950x85 | 7,0 | 90363.L950.E | 90363.L950.H |
| | | ≤16 | 73 | 11280 | 74 | 48 | Ø1250x85 | 8,4 | 90363.L125.E | 90363.L125.H |
| | | ≤19 | 89 | 14100 | 70 | 44 | Ø1550x85 | 10,6 | 90363.L155.E | 90363.L155.H |
| | | - | 112 | 16920 | - | - | Ø1950x85 | 11,2 | 90363.L195.E | 90363.L195.H |

DOZ - Opal polycarbonate diffuser


| | LAMP | UGR | W | lm | lm/W | η(%) | AxB (mm) | kg | HF | DALI |
|--|------|-----|-----|-------|------|------|----------|------|--------------|--------------|
| | LED | ≤16 | 39 | 5640 | 78 | 54 | Ø650x85 | 6,4 | 90277.L650.E | 90277.L650.H |
| | | ≤19 | 56 | 8460 | 79 | 52 | Ø950x85 | 7,0 | 90277.L950.E | 90277.L950.H |
| | | ≤19 | 73 | 11280 | 80 | 52 | Ø1250x85 | 8,4 | 90277.L125.E | 90277.L125.H |
| | | ≤19 | 89 | 14100 | 78 | 49 | Ø1550x85 | 10,6 | 90277.L155.E | 90277.L155.H |
| | | - | 112 | 16920 | - | - | Ø1950x85 | 11,2 | 90277.L195.E | 90277.L195.H |

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

COLOUR / FINISH

| Code | Description |
|------|----------------|
| W | White |
| G | Grey |
| B | Black |
| U | Blue |
| V | Green |
| T | Yellow |
| K | Red |
| N | Jungle |
| D | Golden eye |
| O | Sahara |
| L | Autumn |
| R | Rusty chain |
| C | Pure chocolate |
| 1 | Mist |
| 9 | Dark rock |
| I | Carbon |

DIMENSIONS

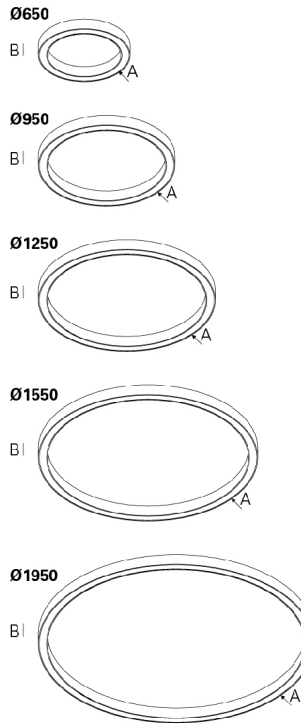

OPTIONS

Colour temperature



3000K

Order code
3000

Perpendicular ceiling rose



Ceiling rose
Surface mounted T24 D95
White
Black
Grey
Recessed T5 D90
White
Black
Grey

Order code
978600W
978600B
978600G
971300W
971300B
971300G

Central ceiling rose



For Ø650mm and Ø950mm versions.
For Ø1250mm version.
For Ø1550mm version.
For Ø1950mm version.

Order code
9705
9706
9710
9711

• To order this option, please choose colour required to the ceiling rose.

Current supply cable



1,5 m transparent current cable 0,75 mm²
3 x 0,75 mm²
5 x 0,75 mm²

Order code
940400
940500

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

Suspension

Order code



Suspension type "I"

(x3) for Ø650mm and Ø950mm versions.

(x4) for Ø1250mm version.

(x5) for Ø1550mm version.

(x6) for Ø1950mm version.


911100

911101


911102

911103


PHOTOMETRY



CONCEPT O 39W
gCONTROL 4000K



CONCEPT O 73W
gCONTROL+ 4000K



CONCEPT O 89W
DOZ 4000K

TO SPECIFY:

Surface or suspended circular LED luminaire. Powder coated extruded aluminium body. Available in 5 sizes (Ø 650, 950, 1250, 1550 and 1950mm) equipped with polycarbonate microprismatic gCONTROL+ or DOZ opal polycarbonate diffuser. Standard version with LED 4000K, CRI>80 and 65.000h lifetime (@L90, B10, Ta 25 C). Optional DALI dimmable driver and 3000K version. Suspension, transparent current supply cable and ceiling rose as accessories. Available in 16 different colours – as Indelague CONCEPT O.

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.