



LED

Norms: EN 60598-1, EN 60598-2-1



PRODUCT DESCRIPTION

Areas of Application: Commercial and Business areas, Public buildings, Housing, Offices, Hotel and Restaurant services, Art and Culture spaces.

Mounting: Suspended.

Light Distribution: Direct / Indirect.

Light Source: LED 4000K, CRI>80, 65.000h life (@L90, B10, Ta 25 C).

Optical System: Diffuser: Polycarbonate.

Control Gear: LED driver, 220-240VAC-50/60Hz.

Materials: Body: Extruded aluminium profile.

Surface Finish: Powder coated.

gCONTROL - Microprismatic polycarbonate diffuser STANDARD | 90% (Direct) + 10% (Indirect)

LAMP	UGR	W	lm	lm/W	η(%)	AxB (mm)	kg	HF	DALI
LED	≤16	39	5640	90	62	Ø650x85	6,4	90364.L650.E	90364.L650.H
	≤16	56	8460	92	61	Ø950x85	7,0	90364.L950.E	90364.L950.H
	≤16	73	11280	94	61	Ø1250x85	8,4	90364.L125.E	90364.L125.H
	≤16	89	14100	90	57	Ø1550x85	10,6	90364.L155.E	90364.L155.H
	-	112	16920	-	-	Ø1950x85	11,2	90364.L195.E	90364.L195.H

gCONTROL+ - Microprismatic polycarbonate diffuser PLUS | 90% (Direct) + 10% (Indirect)

LAMP	UGR	W	lm	lm/W	η(%)	AxB (mm)	kg	HF	DALI
LED	≤16	39	5640	71	49	Ø650x85	6,4	90365.L650.E	90365.L650.H
	≤19	56	8460	74	49	Ø950x85	7,0	90365.L950.E	90365.L950.H
	≤16	73	11280	77	50	Ø1250x85	8,4	90365.L125.E	90365.L125.H
	≤19	89	14100	73	46	Ø1550x85	10,6	90365.L155.E	90365.L155.H
	-	112	16920	-	-	Ø1950x85	11,2	90365.L195.E	90365.L195.H

DOZ - Opal polycarbonate diffuser | 90% (Direct) + 10% (Indirect)

LAMP	UGR	W	lm	lm/W	η(%)	AxB (mm)	kg	HF	DALI
LED	≤19	39	5640	80	55	Ø650x85	6,4	90309.L650.E	90309.L650.H
	≤19	56	8460	80	55	Ø950x85	7,0	90309.L950.E	90309.L950.H
	≤19	73	11280	83	54	Ø1250x85	8,4	90309.L125.E	90309.L125.H
	≤19	89	14100	79	50	Ø1550x85	10,6	90309.L155.E	90309.L155.H
	-	112	16920	-	-	Ø1950x85	11,2	90309.L195.E	90309.L195.H

COLOUR / FINISH

Code	Description
<input type="checkbox"/> W	White


Example code for order: 90365.L195.E (HF) + W (COLOUR/FINISH) + 3000 + 911103 + 940400 + 9711 + W (COLOUR/FINISH) (OPTIONS)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

COLOUR / FINISH


Code	Description
G	Grey
B	Black
U	Blue
V	Green
T	Yellow
K	Red
N	Jungle
D	Golden eye
O	Sahara
L	Autumn
R	Rust
C	Pure chocolate
1	Mist
9	Dark rock
I	Carbon

DIMENSIONS

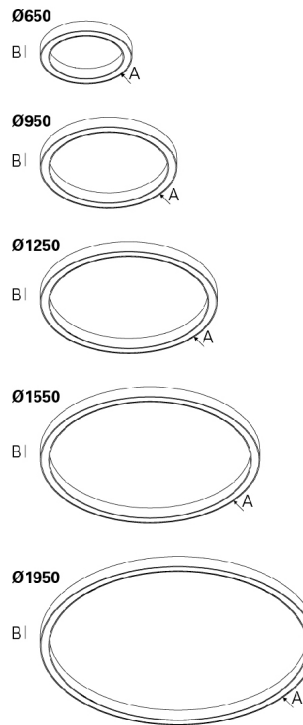

OPTIONS

Colour temperature



3000K

Order code
3000

Perpendicular ceiling rose



Ceiling rose
Circular surface
Circular recessed

Order code

9716
9713

• To order this option, please choose colour required to the ceiling rose

Central ceiling rose



For Ø650mm and Ø950mm versions.
For Ø1250mm version.
For Ø1550mm version.
For Ø1950mm version.

Order code
9705
9706
9710
9711

• To order this option, please choose colour required to the ceiling rose.

Current supply cable



1,5 m transparent current cable 0,75 mm²
3 x 0,75 mm²
5 x 0,75 mm²

Order code

940400
940500

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

Suspension

Order code



Suspension type "I"

(x3) for Ø650mm and Ø950mm versions.

(x4) for Ø1250mm version.

(x5) for Ø1550mm version.

(x6) for Ø1950mm version.


911100

911101


911102

911103


PHOTOMETRY



**CONCEPT O D/I 39W
gCONTROL 4000K**



**CONCEPT O D/I 73W
gCONTROL+ 4000K**



**CONCEPT O D/I 89W
DOZ 4000K**

TO SPECIFY:

Suspended circular LED direct/ indirect luminaire. Powder coated extruded aluminium body. Available in 5 sizes (Ø 650, 950, 1250, 1550 and 1950mm) equipped with polycarbonate microprismatic gCONTROL/ gCONTROL+ or DOZ opal polycarbonate diffuser. Standard version with LED 4000K, CRI>80 and 65.000h lifetime (@L90, B10, Ta 25 C). Optional DALI dimmable driver and 3000K version. Suspension, transparent current supply cable and ceiling rose as accessories. Available in 16 different colours – as Indelague CONCEPT O D/I

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.