

MADE IN
PORTUGAL
by INDELAGUE GROUP

EN



DYNA range


INDELAGUE GROUP

INDELAGUE[™] | ROXO lighting
HIGH TECH | LIGHTING SOLUTIONS

DYNA Mini **LED**

DYNA **LED**


DYNA **LED**

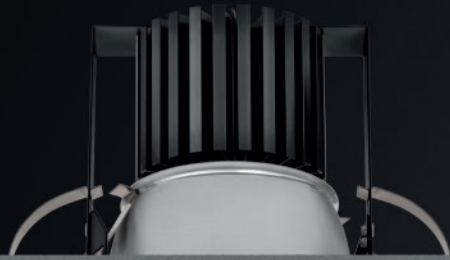


EFFICIENT
High LOR reflector

CONTROL
Glare control


Circular downlight
sizes available:



DYNA Mini LED
Ø174 mm



DYNA LED
Ø236 mm



DYNA IP LED
Ø236 mm

DYNA IP **LED**



INDELAGUE GROUP

INDELAGUE | ROXO lighting
HIGH TECH | LIGHTING SOLUTIONS

DYNA range

DYNA, is our most flexible range of recessed downlighters, it provides two different sizes, multiple power sources and attachments. This downlighter range is produced with the best materials, therefore we only use die cast aluminium bezel and aluminium reflectors, which provide high LOR and energy efficiency. The range consists of five different options, DYNA IP LED, DYNA LED, DYNA IP and DYNA, each one was developed to provide different solutions for different applications and spaces.

The options between LED and Compact Lamps, will be enhanced by the addition of different colours, decorative, transparent or opal glasses and even microprismatic polycarbonate diffuser (only in LED).

Areas of Application: Commercial, business, public areas, houses, offices, restaurants and hotels, art and culture.



DYNA Mini LED

Recessed LED downlighter

- Die cast aluminium bezel.
- LED luminaire luminous flux up to 1500/2500/3300 Lm.
- 12W/25W/35W available.
- LED up to 93 Lm/W.
- Life 50000 Hours.
- Colour temperature 4000/3000K.
- CRI >80.
- Equipped with satin aluminium reflector.

Optional:

- Dimmable versions (DSI/DALI).
- 3 hours emergency.



DYNA LED

Recessed LED downlighter

- Die cast aluminium bezel.
- LED luminaire luminous flux up to 1100/2000/3000 Lm.
- 8W/15W/25W available.
- LED up to 110 Lm/W.
- Life 50000 Hours.
- Colour temperature 4000/3000K.
- CRI >80.

Optional:

- CONTROL - Glare control reflector.
- EFFICIENT - High LOR reflector.
- Dimmable versions (DSI/DALI).
- 1 or 3 hours emergency.



DYNA IP LED

Recessed IP20/54 LED downlighter

- Die cast aluminium bezel.
- LED luminaire luminous flux up to 2300/3400/4300 Lm.
- 15W/25W/33W available.
- LED up to 114 Lm/W.
- Life 50000 Hours.
- Colour temperature 4000/3000K.
- CRI >80.
- 4mm opal tempered glass included.

Optional:

- Dimmable versions (DSI/DALI).
- Microprismatic diffuser.
- 1 or 3 hours emergency.

Details



Dyna LED front view



Dyna LED detail

Color Options



White

Grey

Black

Tempered Glass/Diffuser Options



Decorative

Transparent

Opal


DAM - Microprismatic
diffuser



DYNA

Recessed compact fluorescent downlighter.

- TC-TEL or TC-DEL lamp version available.
- Die cast aluminium bezel.
- Different powers available.
- **Optional:**
- Dimmable versions (DSI/DALI).
- 4mm opal/transparent/decorative tempered glass.
- 1 or 3 hours emergency.
- Class II.

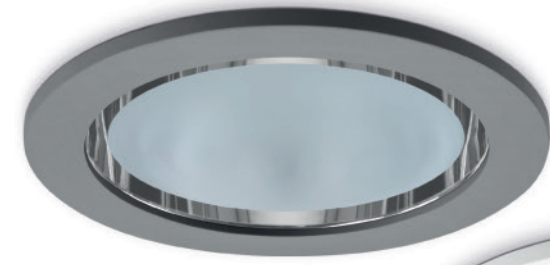

DYNA IP

Recessed IP20/54 compact
fluorescent downlighter

- TC-TEL or TC-DEL lamp version available.
- Die cast aluminium bezel.
- Different powers available.
- 4mm transparent tempered glass included.
- **Optional:**
- Dimmable versions (DSI/DALI).
- Opal/decorative tempered glass.
- 1 or 3 hours emergency.
- Class II.





← Gabinets 18 a 28 | Gabinets 1 a 17 →

INDELAGUE GROUP

INDELAGUE[™]
HIGH TECH | LIGHTING SOLUTIONS

ROXO lighting

HEADQUARTERS

INDÚSTRIA ELÉTRICA DE ÁGUEDA S.A.
Rua da Mina 465 | Covão
Zona industrial EN1 Norte
Apartado 106 / 3754-909
3750-792 Trofa
ÁGUEDA | PORTUGAL
GPS. 40° 36' 00.54" N | 8° 27' 11.76" W
T. +351 234 612 310 | F. +351 234 624 058
WWW.INDELAGUE.COM

UNITED KINGDOM

ROXO LIGHTING LIMITED
24 BEDFORD ROW
LONDON | WC1R 4TQ
roxo.london@roxolighting.com
WWW.ROXOLIGHTING.COM

SPAIN

INDELAGUE ESPAÑA, S.L.
Avenida del Ejército, nº 8 - 1º C
C.P. 15006 | A CORUÑA | ESPAÑA
comercial@indelague.com
WWW.INDELAGUE.COM



The company reserves the right to change specification without prior notification or public announcement.