



**LED**

Norms: EN 60598-1, EN 60598-2-2



### PRODUCT DESCRIPTION

**Areas of Application:** Public buildings, Housing, Offices, Hotel and Restaurant services, Art and Culture spaces.

**Mounting:** Suspended.

**Light Distribution:** Direct.

**Light Source:** LED 4000K, CRI>80, 75.000h life (@L90, B10, Ta 25 °C).

**Optical System:** Lens in PMMA and Polycarbonate Diffuser.


**Control Gear:** LED driver, 220-240VAC-50/60Hz.

**Materials:** Body: Steel sheet and extruded aluminium tube.

**Surface Finish:** Powder coated.


### S4 /E - Recessed ceiling rose



LED	UGR	W	Lm	Lm/W	η(%)	AxBxCxD(mm)		kg	ORDER CODE
≤16	11	960	83	95	Ø30x150x130x71	Ø112	2,0	90098.L150.E	
≤16	11	960	83	95	Ø30x300x130x71	Ø112	2,6	90098.L300.E	
≤16	11	960	83	95	Ø30x450x130x71	Ø112	3,1	90098.L450.E	
≤16	11	960	83	95	Ø30x600x130x71	Ø112	3,7	90098.L600.E	

### S4 /C - Surface mounted ceiling rose



LED	UGR	W	Lm	Lm/W	η(%)	AxBxCxD(mm)		kg	ORDER CODE
	≤16	11	960	83	95	Ø30x150x120x55	-	1,7	90093.L150.E
	≤16	11	960	83	95	Ø30x300x120x55	-	2,2	90093.L300.E
	≤16	11	960	83	95	Ø30x450x120x55	-	2,7	90093.L450.E
	≤16	11	960	83	95	Ø30x600x120x55	-	3,3	90093.L600.E

- To complete the product add optical system. Please order separately.
- The technical data represent rated values for an 47° optic lens.

Example code for order: 90098.L150.E(ORDER CODE) + W(COLOUR/FINISH) + 926200 + 941701 + 926210 + 2000 (OPTIONS)


We reserve the right to make technical changes without prior notice.  
Electrical/Optical data are subjected to a tolerance of +/-10%.

COLOUR / FINISH


Code	Description
W	White
G	Grey
B	Black
U	Blue
V	Green
T	Yellow
K	Red
O	Sahara
L	Autumn
D	Golden eye
R	Rusty chain
C	Pure chocolate
N	Jungle
1	Mist
9	Dark rock
I	Carbon

DIMENSIONS

Recessed ceiling rose version

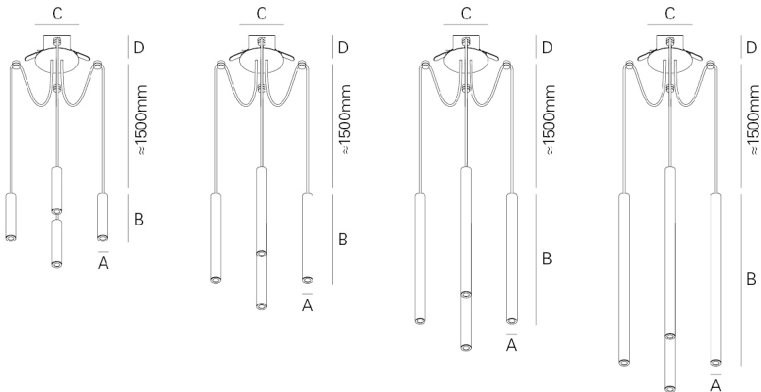

Surface mounted ceiling rose version

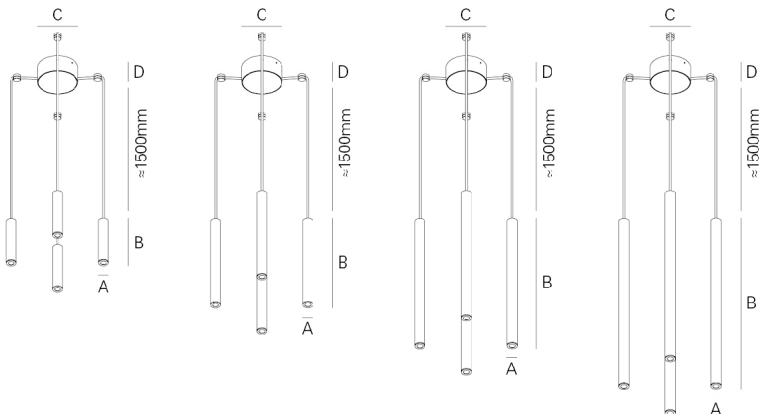

OPTIONS

Optical system



14 Lens  
47 Lens  
Oval Lens

Order Code  
**926200**  
**926201**  
**926202**

Colour temperature



2700K

Order Code  
**2000**


Transparent ceiling holder



Transparent holder

Order Code  
**926210**

Current cable



Orange fabric cable 2,5 m  
Black fabric cable 2,5 m  
Brown fabric cable 2,5 m

Order Code  
**941701**  
**941801**  
**941901**

## DETAILS




14 optical lens light effect



47 optical lens light effect



Light effect with oval lens



Lens fixing system detail

### TO SPECIFY:

Four modules LED luminaire each module with 30 mm diameter and possibility of different types of recessed or surface ceiling rose. Extruded aluminium body and powder coated in epoxy polyester. Standard version with LED 4000K, CRI>80 and 75.000h lifetime (@L90, B10, Ta 25 C). Possibility to choose different beam angles (14 /47 /oval) alongside opal diffuser that gives a smooth light aura and high visual comfort. Cable supply available in 3 different colours: brown, orange or black. Optional transparent clip to customised configurations and 2700K colour temperatures. Available in 16 different colours. - as Indelague GLAM S4.

We reserve the right to make technical changes without prior notice.  
Electrical/Optical data are subjected to a tolerance of +/-10%.