

HEALTHCARE / CLEAN ROOMS LUMINAIRES

INDELAGUE GROUP



Healthcare / Clean Rooms Luminaires - RECESSED

Hospitals, Laboratories, Pharmaceuticals, Food Industries and other places have specific requirements for luminaires, so we produce this full range to fulfil their requirements.

We follow the increase demands for quality and performance in these products and constantly redeveloped light fixtures with High Quality and with IP65 or IP54 rating.

We can also manufacture custom fixtures for specific areas with

their own characteristics, such as: flanged, flange-less, metallic, non-metallic, high pressure, low pressure, screwless bottom fix, and zero maintenance.

Our standard process ensures that every edge is finished to enhance the overall appearance, while making each fixture easier and safer to handle.

We offer a range of architectural recessed and surface products

are carefully designed to complement high-end as well as utilitarian projects.

Areas of Application:

Operating rooms, laboratories, canteens, cafeterias.









Recessed luminaire

- Steel sheet body.
- LED luminaire luminous flux up to 5800 Lm with 45W.
- LED up to 86 Lm/W.
- Life 50000 Hours.
- Colour temperature 4000/3000K.
- CRI >80.
- Equipped with LED driver, 220-240VAC/50Hz.

Optional:

- Dimmable versions (DSI/DALI).
- Microprismatic or opal diffuser.
- Various length and width options.





Recessed luminaire

- Available for T5 lamp version.
- Steel sheet body.
- Equipped with electronic equipment, 220-240VAC-50/60Hz.

Optional:

- Dimmable control gear (DSI/DALI).
- Different diffusers/louvres available.
- Various length and width options.



Recessed luminaire

- Available for T5 lamp version.
- Steel sheet body.
- Equipped with electronic equipment, 220-240VAC-50/60Hz.

Optional:

- Dimmable control gear (DSI/DALI).
- Different diffusers/louvres available.
- Various length and width options.

Fixing Systems



AVT LED, AVT and AVP (Lay in)



THE, CHE and LNE IP (Pull up)

Optic System Options



PBT - Polish double parabolic lower iridescence free w temperated glass iridescence free with



PBP - Polish double parabolic louvre iridescence free with transparent polycarbonate diffuser



PMT - Satin double parabolic louvre with temperated glass



PMP - Satin double parabolic louvre with transparent polycarbonate



DOZ/DOP - Opal polycarbonate diffuser

Microprismatic



DCP - Microperforated central diffuser with transparent polycarbonate diffuser

DCS - Microperforated

central diffuser with

temperated glass

(Not available for CHE luminaire)

DAM -

diffuser

(Only available for CHE luminaire)





• Available for T5 lamp version.

- Steel sheet body.
- Equipped with waterproof brackets.
- Equipped with electronic equipment, 220-240VAC-50/60Hz.

Optional:

- Dimmable control gear (DSI/DALI).
- Different diffusers/louvres available.
- Various length and width options.



(Not available for LED Products and CHE/LNE IP luminaire)






CHE IP65

Recessed luminaire

- Available for T5 lamp version.
- · Steel sheet body.
- Equipped with waterproof brackets.
- Equipped with electronic equipment, 220-240VAC-50/60Hz.
- Equipped with microperforated central diffuser. Optional:

• Dimmable control gear (DSI/DALI).

- Micro-perforated central diffuser with temperated glass or with transparent polycarbonate diffuser.
- Various length and width options.






LNE IP IP54/20

Recessed luminaire

- Available for T5 lamp version.
- Steel sheet body.
- Equipped with brackets.
- Equipped with electronic equipment, 220-240VAC-50/60Hz.

Optional:

- Dimmable control gear (DSI/DALI).
- Microprismatic or opal diffuser.
- · Various length and width options.

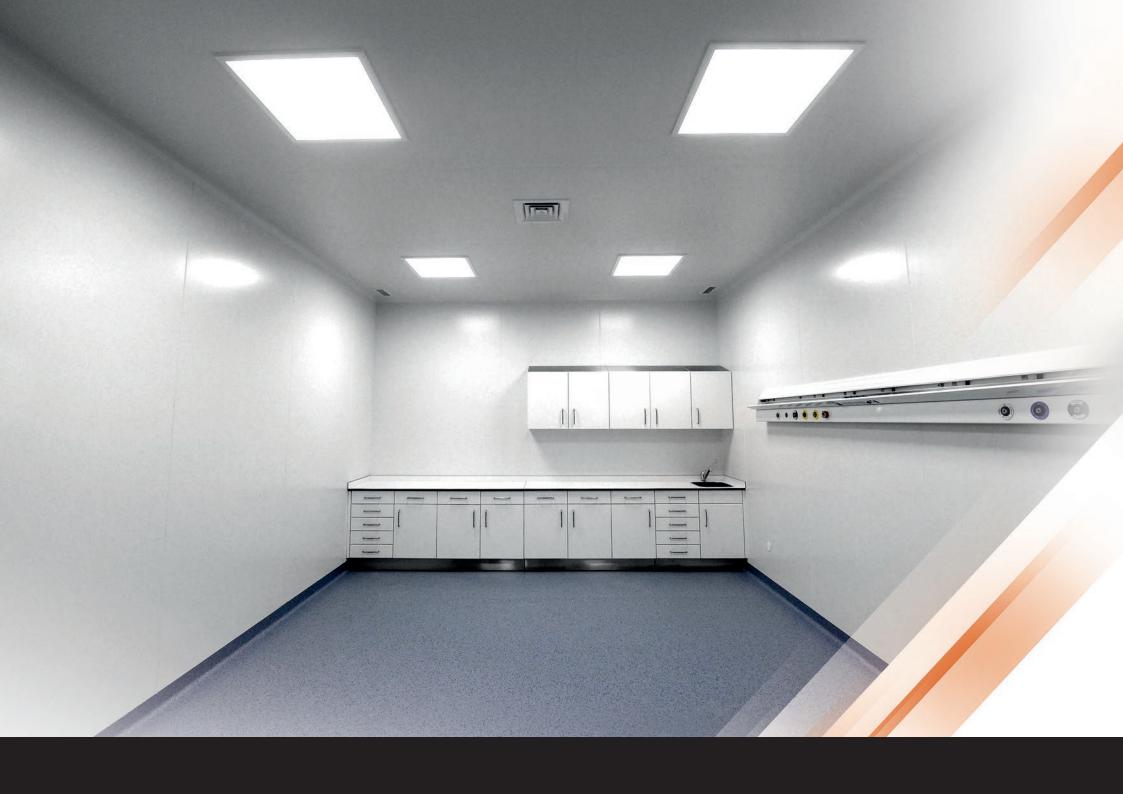



Healthcare / Clean Rooms Luminaires - SURFACE

As the Recessed versions, the Surface products have the same production process to achieve the High Quality demanded by the projects that we work in a daily basis. Commitment to excellence is with years of experience producing quality fixtures, all supported by unbeatable customer service.

Areas of Application:

Operating rooms, laboratories, canteens, cafeterias.









- Steel sheet body.
- LED luminaire luminous flux up to 5800 Lm with 45W.
- LED up to 86 Lm/W.
- Life 50000 Hours.
- Colour temperature 4000/3000K.
- CRI >80.
- Equipped with LED driver, 220-240VAC/50Hz.
- Optional:
- Dimmable versions (DSI/DALI).
- Microprismatic or opal diffuser.
- Various length and width options.





- Available for T5 lamp version.
- Steel sheet body.
- Equipped with electronic equipment, 220-240VAC-50/60Hz.

Optional:


- Dimmable control gear (DSI/DALI).
- Different diffusers/louvres available.
- Various length and width options.



- Available for T5 lamp version.
- Steel sheet body.
- Equipped with electronic equipment, 220-240VAC-50/60Hz.

Optional:

- Dimmable control gear (DSI/DALI).
- Microprismatic or opal diffuser.
- Various length and width options.

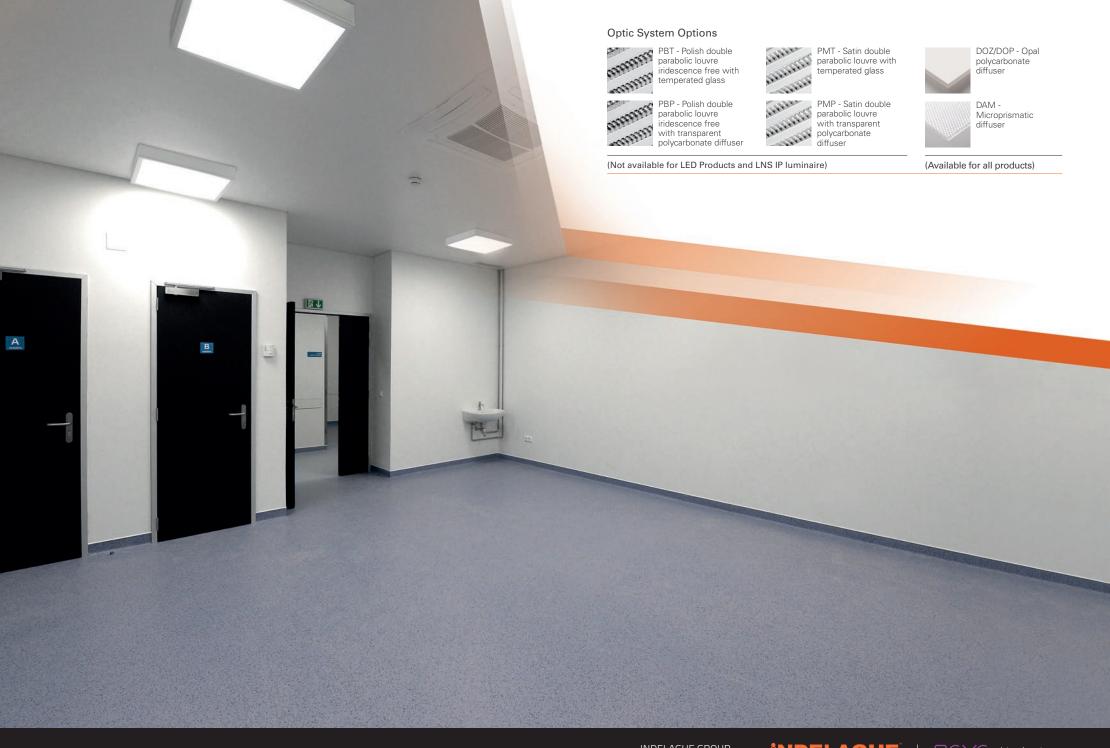

INDELAGUE GROUP

INDELAGUE

HIGHTECH | LIGHTING SOLUTIONS

ROXO lighting







The company reserves the right to change specification without prior notification or public announcement.