



LED

Norms: EN 60598-1, EN 60598-2-1



PRODUCT DESCRIPTION

Areas of Application: Commercial and Business areas, Public buildings, Housing, Offices, Art and Culture spaces.

Mounting: Ceiling surface.

Light Distribution: Direct.

Light Source: LED 4000K, CRI>80, 50.000h life (@L80, B10, Ta 25 °C).


Optical System: Optical glass convex lenses.

Control Gear: LED driver, 220-240VAC-50/60Hz.


Materials: Body: Steel sheet.

Surface Finish: Powder coated.

50 Lens


	LAMP	UGR	W	lm	lm/W	η(%)	AxBxC (mm)	kg	HF	DALI
	LED	≤10	44	5768	104	79	597x597x42	8,5	90322.L038.E5	90322.L038.H5
		≤10	44	5768	104	79	1180x258x42	8,0	90323.L038.E5	90323.L038.H5

80 Lens

	LAMP	UGR	W	lm	lm/W	η(%)	AxBxC (mm)	kg	HF	DALI
	LED	≤16	44	5768	105	80	597x597x42	8,5	90322.L038.E8	90322.L038.H8
		≤16	44	5768	102	78	1180x258x42	8,0	90323.L038.E8	90323.L038.H8

COLOUR / FINISH

Code	Description
 W/B	(1) White / (2) Black
 W/G	(1) White / (2) Grey
 G/W	(1) Grey / (2) White
 G/B	(1) Grey / (2) Black
 B/W	(1) Black / (2) White
 B/G	(1) Black / (2) Grey



Subtitle:
 (1) Luminaire outside trim colour
 (2) Luminaire inside trim colour


• The finish order code is based on two colours, where (1) is the luminaire outside trim colour and (2) is the luminaire inside trim colour.

Example code for order: 90323.L038.H8 (DALI) + W/B (COLOUR/FINISH) + 3000 (OPTIONS)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

OPTIONS

Colour temperature



3000K

Order code
3000

Bluetooth module



Bluetooth module for wireless control through smartphone.


Option supplied under request.

Low power version




Option supplied under request.

PHOTOMETRY




HIKARI /C 44W
(600x600mm) 4000K 50°



HIKARI /C 44W
(600x600mm) 4000K 80°

DIMENSIONS

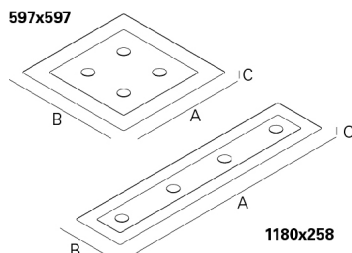

TO SPECIFY:

Surface LED luminaire, with modern and elegant lines. Equipped with 50 or 80 convex optical glass lenses, providing high visual comfort ($UGR \leq 10$). Standard version with 4000K, $CRI > 80$ and 50.000h lifetime (@ L80, B10, Ta 25 C). Different colour combinations available. Optional DALI dimmable driver, 3000K and Bluetooth module for wireless control through smartphone. - as Indelague HIKARI /C

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.