



LED

Norms: EN 60598-1, EN 60598-2-1



PRODUCT DESCRIPTION

Areas of Application: Commercial and Business areas, Public buildings, Housing, Offices, Art and Culture spaces.

Mounting: Suspended.

Light Distribution: Direct.

Light Source: LED 4000K, CRI>80, 50.000h life (@L80, B10, Ta 25 °C).

Optical System: Optical glass convex lenses.

Control Gear: LED driver, 220-240VAC-50/60Hz.

Materials: Body: Steel sheet.

Surface Finish: Powder coated.

50 Lens

LAMP	UGR	W	lm	lm/W	η(%)	AxBxC (mm)	kg	HF	DALI
LED	≤10	44	5768	104	79	600x600x46	8,5	90316.L038.E5	90316.L038.H5
	≤10	44	5768	104	79	1180x258x46	8,0	90319.L038.E5	90319.L038.H5

80 Lens


LAMP	UGR	W	lm	lm/W	η(%)	AxBxC (mm)	kg	HF	DALI
LED	≤16	44	5768	105	80	600x600x46	8,5	90316.L038.E8	90316.L038.H8
	≤16	44	5768	102	78	1180x258x46	8,0	90319.L038.E8	90319.L038.H8

Please note:

- To complete the 600x600 version add suspension, current supply cable and ceiling rose. Please order separately.
- To complete the 1180x258 version add suspension, please order separately. Current supply cable and ceiling rose included.

COLOUR / FINISH

Code	Description
W/B	(1) White / (2) Black
W/G	(1) White / (2) Grey
G/W	(1) Grey / (2) White
G/B	(1) Grey / (2) Black
B/W	(1) Black / (2) White
B/G	(1) Black / (2) Grey



Subtitle:
 (1) Luminaire outside trim colour
 (2) Luminaire inside trim colour


- The finish order code is based on two colours, where (1) is the luminaire outside trim colour and (2) is the luminaire inside trim colour.

Example code for order: 90319.L038.H8 (DALI) + W/B (COLOUR/FINISH) + 3000 + CXS + 940500 + 910001 (OPTIONS)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

OPTIONS

Colour temperature



3000K

Order code
3000

Bluetooth module



Bluetooth module for wireless control through smartphone.

Option supplied under request.

Ceiling rose (for 600x600mm version)



Square ceiling rose
Surface mounted
Recessed

- Please order suspension type "I" (x4) separately.
- Other colours under request.

Order code

9717
9714

Ceiling rose (for 1180x258mm version)




Rectangular ceiling rose
Surface mounted
Recessed

- Please order suspension type "I" (x2) separately.
- Other colours under request.

Order code

CXS
CXE

Current supply cable



1,5m transparent cable 0,75mm2
3x0,75mm2
5x0,75mm2

Order code

940400
940500

Suspension



Suspension type "I" (x2)
Suspension type "I" (x4)

- (x2) only for 1180x258 version
- (x4) only for 600x600 version

Order code

910001


910002

Low power version




Option supplied under request.

PHOTOMETRY




HIKARI 44W
(600x600mm) 4000K 50°



HIKARI 44W
(600x600mm) 4000K 80°

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

DIMENSIONS

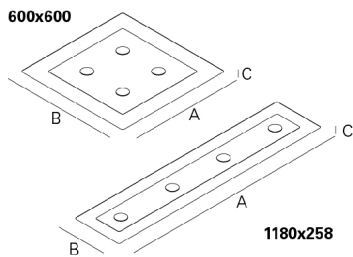

TO SPECIFY:

Suspended LED luminaire, with modern and elegant lines. Equipped with 50 or 80 convex optical glass lenses, providing high visual comfort (UGR<=10). Standard version with 4000K, CRI>80 and 50.000h lifetime (@L80, B10, Ta 25 C). Different colour combinations available. Optional DALI dimmable driver, 3000K and Bluetooth module for wireless control through smartphone. Suspension, current supply cable and ceiling rose as accessories. - as Roxo Lighting HIKARI

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.