

Norms: EN 60598-1, EN 60598-2-1



**PRODUCT DESCRIPTION**

**Areas of Application:** Industrial areas, commercial areas.

**Mounting:** Surface.

**Light Distribution:** Direct.

**Control Gear:** Magnetic ballast, ignitor and capacitor.

**Materials:** Body: Steel sheet.  
Frame: Extruded aluminium

**Surface Finish:** Powder coated in white matt (RAL9016).



VPO - Symmetric hammered aluminium reflector with transparent tempered glass

LAMP*	W	AxBxC (mm)	D (mm)	ORDER CODE
HIE	E40 1x250	602x315x180	768	915L.250.11.B4
	E40 1x400	602x315x180	768	915L.400.11.B4
HSE-E	E40 1x250	602x315x180	768	9058.250.11.B4
	E40 1x400	602x315x180	768	9058.400.11.B4


VPA - Asymmetric hammered aluminium reflector with transparent tempered glass

LAMP*	W	AxBxC (mm)	D (mm)	ORDER CODE
HIE	E40 1x250	602x315x180	768	915L.250.6Z.B4
	E40 1x400	602x315x180	768	915L.400.6Z.B4
HSE-E	E40 1x250	602x315x180	768	9058.250.6Z.B4
	E40 1x400	602x315x180	768	9058.400.6Z.B4

**OPTIONS**

Code	Description
--	Automatic switch for an auxiliary lamp.
--	Lamps as optional.

**DIMENSIONS**

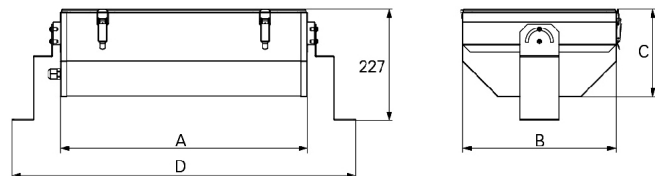

\* Lamp not included.  
Example code for order: 915L.250.11.B4 (ORDER CODE)

We reserve the right to make technical changes without prior notice.  
Electrical/Optical data are subjected to a tolerance of +/-10%.

**DETAILS**



Aluminium frame for easy handling



Adjustable arm



We can provide lighting schemes for tunnels

**TO SPECIFY:**

Surface IP65 high bay luminaire suitable for 1x250/400W high pressure sodium or metal halide lamp. Symmetric or asymmetric reflector with high efficient aluminium and transparent tempered glass. Optional automatic switch for an auxiliary lamp – as Roxo Lighting HTW.

We reserve the right to make technical changes without prior notice.  
Electrical/Optical data are subjected to a tolerance of +/-10%.