



Norms: EN 60598-1, EN 60598-2-2



PRODUCT DESCRIPTION

Areas of Application: Industrial areas, commercial areas.

Mounting: Ceiling recessed.

Light Distribution: Direct.

Control Gear: Magnetic ballast, ignitor and capacitor.

Materials: Body: Steel sheet.
Frame: Extruded aluminium.

Surface Finish: Powder coated in white matt (RAL9016).


VPO - Symmetric hammered aluminium reflector with transparent tempered glass

LAMP*	W	AxBxC (mm)	IP	ORDER CODE
HIE	E40 1x250	620x362x180	574x350	9158.250.11.B4
	E40 1x400	620x362x180	574x350	9158.400.11.B4
HSE-E	E40 1x250	620x362x180	574x350	905R.250.11.B4
	E40 1x400	620x362x180	574x350	905R.400.11.B4

OPTIONS

Code	Description
--	Automatic switch for an auxiliary lamp.
--	Lamps as optional.

DIMENSIONS

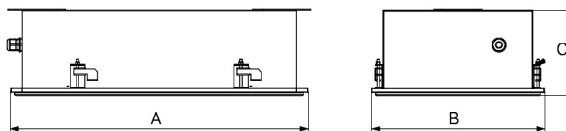

DETAILS



Plastic cable gland



Security cable



IP65 brackets

TO SPECIFY:

Recessed IP65 high bay luminaire suitable for 1x250/400W high pressure sodium or metal halide lamp. Reflector with high efficient aluminium and transparent tempered glass. Optional automatic switch for an auxiliary lamp – as Roxo Lighting HTW /E.

* Lamp not included.

Example code for order: 9158.250.11.B4 (ORDER CODE)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.