

Norms: EN 60598-1, EN 60598-2-1



PRODUCT DESCRIPTION

Areas of Application: Industrial areas, commercial areas.

Mounting: Track system.

Light Distribution: Direct.

Control Gear: Electronic equipment
220-240VAC-50/60Hz.


Wiring: For three circuit track system (adapters included).

Materials: Body: Steel sheet.


Surface Finish: Powder coated in white matt (RAL9016).



RLS - Symetric with polished double parabolic louvre

 LAMP*	W	AxBxC (mm)	ORDER CODE
T5	1x28	1185x111x101	9G2S.128.0P.A4
	1x35	1485x111x101	9G2S.135.0P.A4
	1x49	1485x111x101	9G2S.149.0P.A4
	1x54	1185x111x101	9G2S.154.0P.A4
	1x80	1485x111x101	9G2S.180.0P.A4
	2x28	1185x111x101	9G2S.228.0P.A4
	2x35	1485x111x101	9G2S.235.0P.A4
	2x49	1485x111x101	9G2S.249.0P.A4
	2x54	1185x111x101	9G2S.254.0P.A4
	2x80	1485x111x101	9G2S.280.0P.A4

RAE - Asymmetric high efficiency reflector

 LAMP*	W	AxBxC (mm)	ORDER CODE
T5	1x28	1185x166x113	9G2S.128.5E.A4
	1x35	1485x166x113	9G2S.135.5E.A4
	1x49	1485x166x113	9G2S.149.5E.A4
	1x54	1185x166x113	9G2S.154.5E.A4
	1x80	1485x166x113	9G2S.180.5E.A4
	2x28	1185x166x113	9G2S.228.5E.A4
	2x35	1485x166x113	9G2S.235.5E.A4
	2x49	1485x166x113	9G2S.249.5E.A4
	2x54	1185x166x113	9G2S.254.5E.A4
	2x80	1485x166x113	9G2S.280.5E.A4


*Lamp not included.
Example code for order: 9G2S.128.0P.A4 (HF)

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

OPTIONS


Code	Description
K3	Emergency unit 3 hours
K1	Emergency unit 1 hour.
--	Lamps as optional.
--	Track system

DIMENSIONS

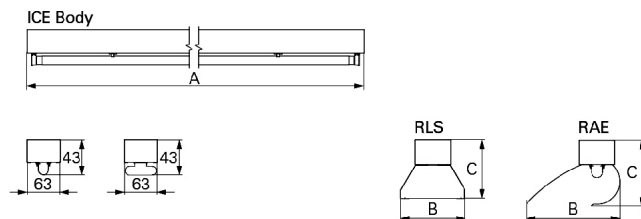


PHOTOMETRY


ICE 2x49W RLS
Lamp: 2 x 45W/840 HO




ICE 2x35W RLS
Lamp: 2 x 35W/840 HE



ICE 2x80W RLS
Lamp: 2 x 80W/840 HO




ICE 1x80W RAE
Lamp: 1 x 80W/840 HO



PERFORMANCE

ICE RLS

LAMPS: 2 x 49W
SPACING: 17m x 8,8m
CEILING HEIGHT: 6m
MAINTENANCE: 0,8
REFLECTANCE: 20/70/50
WORKING PLANE: 1m
ILLUMINANCE: 1005 lux

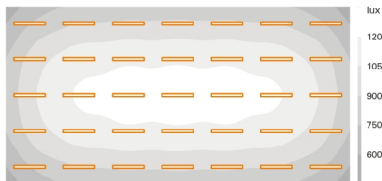

TO SPECIFY:

Track system luminaire for single or twin 28/35/49/54/80W T5(G5) fluorescent lamps. Luminaire includes two adapters for three circuit track system. Optional symmetric/asymmetric reflectors and 1 or 3 hours emergency available - as Roxo Lighting ICE.

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.