

Norms: EN 60598-1, EN 60598-2-2



#### PRODUCT DESCRIPTION

**Areas of Application:** Commercial and Business areas, Public buildings, Housing, Offices, Hotel and Restaurant services, Art and Culture spaces.

**Mounting:** Ceiling recessed.


**Light Distribution:** Direct.

**Light Source:** LED or Halogen lamp (GU10 or GU5.3).

**Control Gear:** Not included.

**Materials:** Body: Steel sheet.

**Surface Finish:** Powder coated.

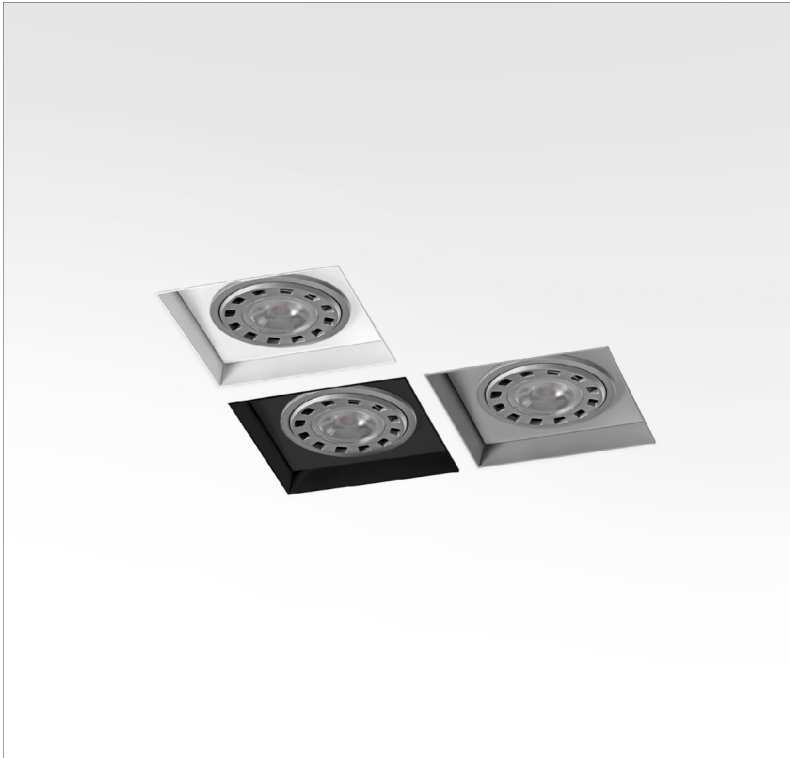

LAMP*	☒	W	BEAM ↙	AxBxC (mm)	DxE (mm)	☒	Kg	ORDER CODE
LED	GU10	4/5,5	40/25	120x120x114	69x69	70x70	0,25	90114.K100.0
LED 12V	GU5.3	7/10	24/36	120x120x114	69x69	70x70	0,25	90114.C100.A
HAL	GU10	max.50	20-40/25-50	120x120x114	69x69	70x70	0,25	90114.K100.0
HAL 12V	GU5.3	max.50	24/60	120x120x114	69x69	70x70	0,25	90114.C100.A

Please note: Lamp height should not exceed 60 mm.


#### COLOUR / FINISH

Code	Description
W	White (RAL 9016)
B	Black (RAL 9005)
G	Grey (RAL 9006)

#### OPTIONS

Code	Description
9655	12V transformer.
--	Emergency unit 3 hours.
--	Lamps as optional.

#### DETAILS




Trimless version detail

\* Lamp not included.


Example code for order: 90114.C100.A (ORDER CODE) + W (COLOUR/FINISH) + 9655 (OPTIONS)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

### PHOTOMETRY



### DIMENSIONS



### TO SPECIFY:

Recessed adjustable trimless square spotlight for LED or Halogen lamp (GU10 or GU5.3). For ceiling thicknesses of 1-20mm - as Indelague JAAZ /T.

We reserve the right to make technical changes without prior notice.  
Electrical/Optical data are subjected to a tolerance of +/-10%.