

LED



Norms: EN 60598-1, EN 60598-2-2



IP 20

BLINE
960°C

230V/50Hz

PRODUCT DESCRIPTION

Areas of Application: Commercial and Business areas, Public buildings, Offices, Schools, Corridors.

Mounting: Ceiling recessed.

Light Distribution: Direct.


Light Source: LED 4000K, CRI>80, 50.000h life.

Control Gear: LED driver, 220-240VAC-50/60Hz.

Materials: Body: Steel sheet.
Diffuser: BLINE opal polycarbonate

Surface Finish: Powder coated in white matt (RAL9016).

BLINE - Opal polycarbonate diffuser.

LED	W	Lm	Lm/W	η(%)	AxBxC (mm)	IP	Kg	HF	DSI	DALI
	1x11	1500	82	67	565x105x78	565x93	1,5	9Z4J.111.8J.F4	9Z4J.111.8J.J4	9Z4J.111.8J.E4
	1x22	3000	86	70	1130x105x78	1130x93	2,7	9Z4J.122.8J.F4	9Z4J.122.8J.J4	9Z4J.122.8J.E4
	1x27	3750	84	69	1415x105x78	1415x93	3,3	9Z4J.127.8J.F4	9Z4J.127.8J.J4	9Z4J.127.8J.E4

Please note:

To complete a line, start kit will be necessary. Please order separately.
Recessed dimensions without end caps, add 14 mm to complete the line.
11W version only available as end part of the line.

DETAILS



Clip-in polycarbonate diffuser

OPTIONS

Colour temperature



3000K

Order code
3000

Start kit



Start kit


• 2 end caps and one cable lock, includes screws.

Order code
920200

Example code for order: (2x) 9Z4J.122.8J.E4 (DALI) + 3000 + 9212 + 9453 + 965100 + 955000 (OPTIONS)

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

Through-wiring



	Order code
1,5 mm ² through-wiring	
3 x 1,5 mm ²	9452
5 x 1,5 mm ²	9453
2,5 mm ² through-wiring	
3 x 2,5 mm ²	9454
5 x 2,5 mm ²	9455

Connectors





	Order code
KIT 3-pole Mini Wieland GST15i3 (male and female)	965000
Connector 3-pole Mini Wieland GST15i3 male	965001
Connector 3-pole Mini Wieland GST15i3 female	965002
KIT 5-pole Mini Wieland GST15i5 DIM (male and female)	965100
Connector 5-pole Mini Wieland GST15i5 DIM male	965101
Connector 5-pole Mini Wieland GST15i5 DIM female	965102

Steel safety cable



	Order code
Steel safety cable	955000


PHOTOMETRY




PERFORMANCE

LNE Mini LED Line BLINE


LED: 1 x 22W
 SPACING: 9,4m x 4,4m
 CEILING HEIGHT: 3m
 MAINTENANCE: 0,8
 REFLECTANCE: 20/70/50
 WORKING PLANE: 0,8m
 ILLUMINANCE: 237 lux

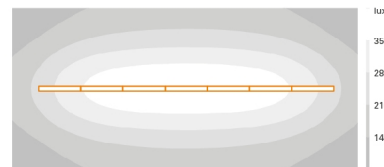

DIMENSIONS

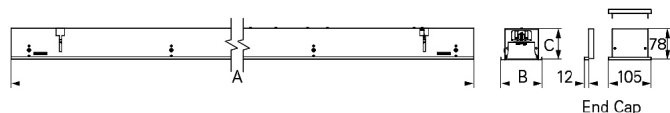

FIXING SYSTEMS



Pull-up version with brackets for plasterboard ceilings.

TO SPECIFY:

Recessed LED luminaire for continuous line with BLINE polycarbonate diffuser and total luminous flux of 1500/3000 or 3750lm, CRI>80 and LED life time 50.000h. Suitable for pull up version with brackets. Optional 3000K and dimmable versions available – as Indelague LNE Mini LED Line.

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.