

Norms: EN 60598-1, EN 60598-2-25



### PRODUCT DESCRIPTION

**Areas of Application:** Hospitals, Restaurant and Hotel services, Cleanrooms.


**Mounting:** Surface.

**Light Distribution:** Direct.

**Control Gear:** Electronic equipment, 220-240VAC-50/60Hz.

**Materials:** Body: Steel sheet.  
Frame: Extruded aluminium.

**Surface Finish:** Powder coated in white matt (RAL9016).

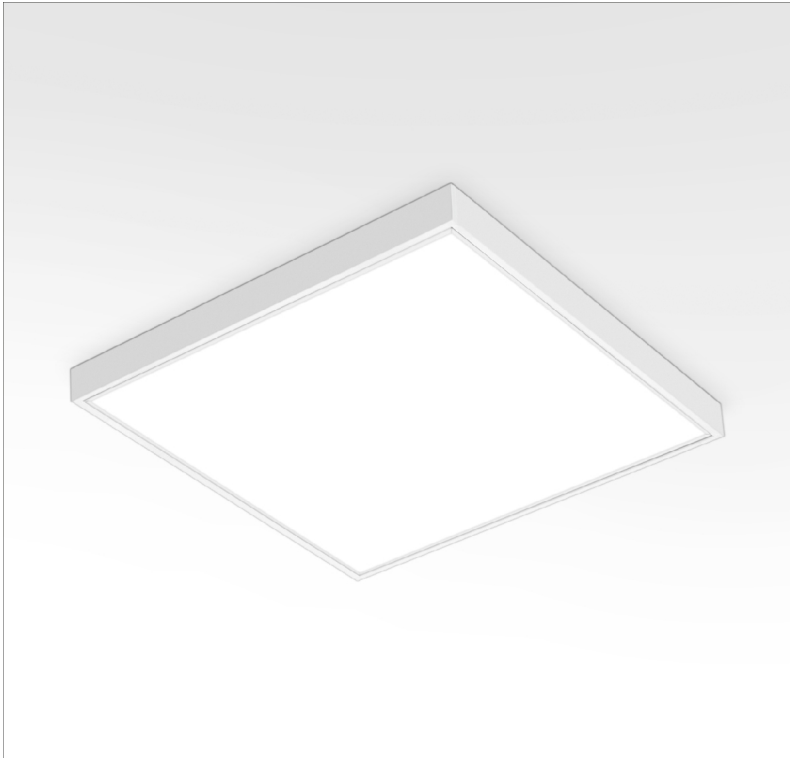

#### DAM - Microprismatic diffuser



LAMP*	UGR	W	Lm/W	η(%)	AxBxC (mm)	Kg	HF	DSI	DALI
T5	≤19	3x14	62	81	597x597x68	5	9R4D.314.6V.A4	9R4D.314.6V.84	9R4D.314.6V.74
	≤22	3x24	60	86	597x597x68	5	9R4D.324.6V.A4	9R4D.324.6V.84	9R4D.324.6V.74
	≤19	4x14	63	81	597x597x68	5	9R4D.414.6V.A4	9R4D.414.6V.84	9R4D.414.6V.74
	≤22	4x24	63	88	597x597x68	5	9R4D.424.6V.A4	9R4D.424.6V.84	9R4D.424.6V.74

#### DOP - Opal polycarbonate diffuser



LAMP*	UGR	W	Lm/W	η(%)	AxBxC (mm)	Kg	HF	DSI	DALI
T5	≤19	3x14	48	62	597x597x68	5	9R4D.314.21.A4	9R4D.314.21.84	9R4D.314.21.74
	≤22	3x24	46	66	597x597x68	5	9R4D.324.21.A4	9R4D.324.21.84	9R4D.324.21.74
	≤22	4x14	48	63	597x597x68	5	9R4D.414.21.A4	9R4D.414.21.84	9R4D.414.21.74
	≤22	4x24	50	70	597x597x68	5	9R4D.424.21.A4	9R4D.424.21.84	9R4D.424.21.74

#### OPTIONS

Code	Description
K3	Emergency unit 3 hours.
K1	Emergency unit 1 hour.
--	Lamps as optional.

#### DETAILS



Security cable


\* Lamp not included.  
Example code for order: 9R4D.424.6V.74 (DALI)

We reserve the right to make technical changes without prior notice.  
Electrical/Optical data are subjected to a tolerance of +/-10%.



**PHOTOMETRY**

**DIMENSIONS**

**LNS IP 3x24W DAM**  
Lamp: 3 x 24W/840 HO



**LNS IP 4x24W DOP**  
Lamp: 4 x 24W/840 HO



**TO SPECIFY:**

IP54 surface mounted T5(G5) clean room luminaire. Aluminium frame available with microprismatic or opal diffuser. Equipped with HF control gear. Dimmable version and emergency also available – as Roxo Lighting LNS IP.

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.