



**LED**



Norms: EN 60598-1, EN 60598-2-1

CE IP 20

#### PRODUCT DESCRIPTION

**Areas of Application:** Commercial and Business areas, Public buildings, Housing, Offices, Hotel and Restaurant services, Art and Culture spaces.

**Light Source:** LED 4000K, CRI>80, 50.000h life.

**Optical System:** Diffuser: Opal acrylic.

**Control Gear:** LED driver, 220-240VAC-50/60Hz.

**Wiring:** Ceiling rose with LED driver included.

**Materials:** Body: Steel sheet.

**Surface Finish:** Powder coated.

DOA - Opal acrylic diffuser.

LED	W	Lm	AxBxC (mm)	Kg	HF	DALI
	1x16	2250	920x80x80	3,2	90127.L116.E	90127.L116.H
	1x22	3000	1200x80x80	3,9	90127.L122.E	90127.L122.H
	1x27	3750	1480x80x80	4,9	90127.L127.E	90127.L127.H

#### OPTIONS


Code	Description
3000	Colour temperature 3000K.

#### DETAILS



Suspension detail

#### DIMENSIONS

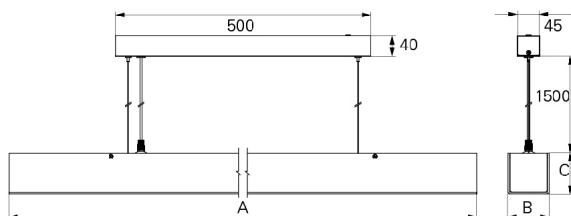

#### TO SPECIFY:

Suspended LED luminaire with opal diffuser and 2250/3000/3750 lumen light engine - as Indelague LUCID LED.

Example code for order: 90127.L116.H (DALI) + 3000 (OPTIONS)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.