

LED



Norms: EN 60598-1, EN 60598-2-1

CE IP 20

PRODUCT DESCRIPTION

Areas of Application: Commercial and Business areas, Public buildings, Housing, Offices, Hotel and Restaurant services, Art and Culture spaces.

Mounting: Wall Mounted.

Light Distribution: Indirect.

Light Source: LED 4000K, CRI>80, 50.000h life.

Control Gear: LED driver, 220-240VAC-50/60Hz.

Materials: Body: Steel sheet.

Surface Finish: Powder coated.

Edge

	LED	W	Lm	AxBxC (mm)	Kg	ORDER CODE
		6	860	281x268x164	0,6	90219.L106.E


Corner

	LED	W	Lm	AxBxC (mm)	Kg	ORDER CODE
		3	430	151x185x270	0,4	90218.L103.E

COLOUR / FINISH

Code	Description
W	White (RAL 9016)
B	Black (RAL 9005)
G	Grey (RAL 9006)

DIMENSIONS

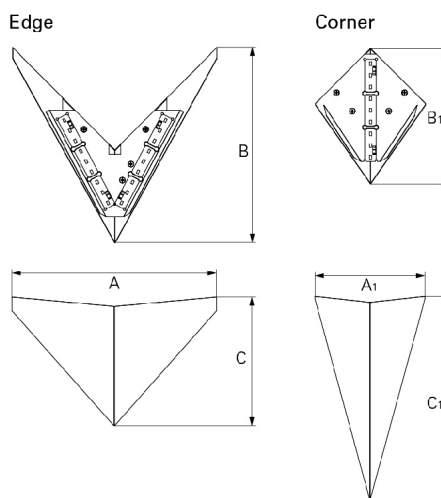

Example code for order: 90219.L106.E (ORDER CODE) + W (COLOUR/FINISH)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

TO SPECIFY:

LED architectural wall mounted uplight luminaire. Suitable for corners or edges.
Optional colors - as Indelague MURAL.

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.