

LED



Norms: EN 60598-1, EN 60598-2-1

CE IP 20

### PRODUCT DESCRIPTION

**Areas of Application:** Commercial and Business areas, Public buildings, Housing, Offices, Hotel and Restaurant services, Art and Culture spaces.

**Mounting:** Wall Mounted.

**Light Distribution:** Indirect.

**Light Source:** LED 4000K, CRI>80, 50.000h life.

**Control Gear:** LED driver, 220-240VAC-50/60Hz.

**Materials:** Body: Steel sheet.

**Surface Finish:** Powder coated.

#### Edge



LED	W	Lm	AxBxC (mm)	Kg	ORDER CODE
	6	860	281x268x164	0,6	90219.L106.E

#### Corner




LED	W	Lm	AxBxC (mm)	Kg	ORDER CODE
	3	430	151x185x270	0,4	90218.L103.E

#### COLOUR / FINISH

Code	Description
W	White (RAL 9016)
B	Black (RAL 9005)
G	Grey (RAL 9006)

#### DIMENSIONS

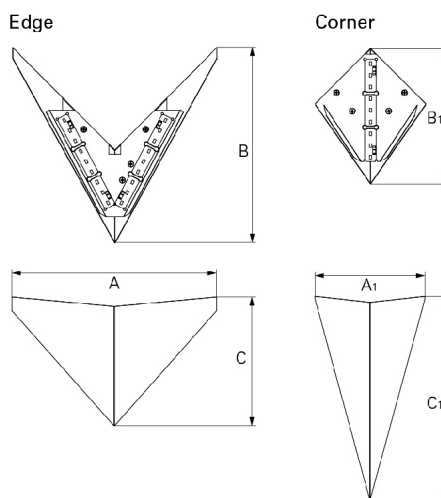

Example code for order: 90219.L106.E (ORDER CODE) + W (COLOUR/FINISH)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

**TO SPECIFY:**

LED architectural wall mounted uplight luminaire. Suitable for corners or edges.  
Optional colors - as Roxo Lighting MURAL.

We reserve the right to make technical changes without prior notice.  
Electrical/Optical data are subjected to a tolerance of +/-10%.