

**LED**

Norms: EN 60598-1, EN 60598-2-1



**PRODUCT DESCRIPTION**

**Areas of Application:** Commercial, Business areas, Housing, Art and Culture spaces. Offices, Public buildings, Hotel and Restaurant services.

**Mounting:** Suspended.

**Light Distribution:** Indirect.

**Light Source:** LED 4000K, CRI>90, 60.000h life (@L80, B10, Ta 25 °C).

**Optical System:** Diffuser: Opal polycarbonate.

**Control Gear:** Not included.

**Materials:** Body: Extruded aluminium.

**Surface Finish:** Powder coated.

bLINE - Opal polycarbonate diffuser

	LED	UGR	W	Lm	V	η(%)	AxBxC	kg	ORDER CODE
		≤10	13	1170	24	46	1014x35x35	1,2	90399.L101.0
		≤10	19	1820	24	46	1514x35x35	1,6	90399.L151.0
		≤10	26	2470	24	46	2014x35x35	2,0	90399.L201.0

Note:  
To complete the product add ceiling rose. Please order separately. Suspension kit is included in the product (1,5 m).  
In the option TW and RGBW, the product mandatorily includes the transparent current supply cable.


Example code for order: 90399.L101.0 (ORDER CODE) + W(COLOUR/FINISH) + T000 + 9781(OPTIONS)

We reserve the right to make technical changes without prior notice.  
Electrical/Optical data are subjected to a tolerance of +/-10%.

### COLOUR / FINISH

Code	Description
W	White
G	Grey
B	Black
U	Blue
V	Green
T	Yellow
K	Red
N	Jungle
D	Golden eye
O	Sahara
L	Autumn
R	Rusty chain
C	Pure chocolate
1	Mist
9	Dark rock
I	Carbon

### DIMENSIONS

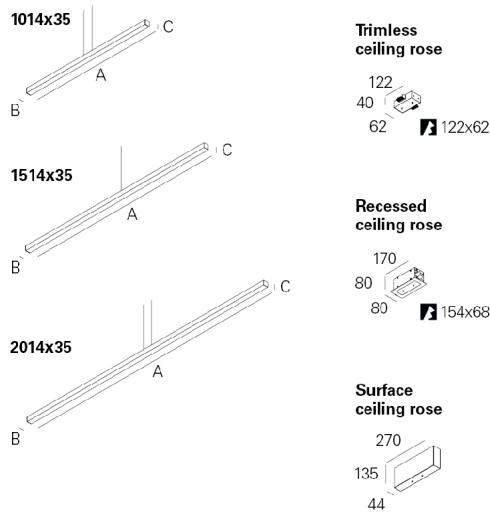

### OPTIONS

#### Colour temperature



2700K  
3000K  
Tunable White (3000K - 5700K)  
RGB White (2700K)

• TW and RGBW are only available with OmniaControl.

#### Order code

**2000**  
**3000**  
**T000**  
**R000**

#### Surface ceiling rose



HF  
DALI  
OmniaControl (Voice/App)

• To complete this option, please add ceiling rose colour.

#### Order code

**9779**  
**9780**  
**9781**

#### Recessed ceiling rose



HF  
DALI  
OmniaControl (Voice/App)

• To complete this option, please add ceiling rose colour.

#### Order code

**9773**  
**9774**  
**9775**

#### Trimless ceiling rose




HF  
DALI  
OmniaControl (Voice/App)

• To complete this option, please add ceiling rose colour.

#### Order code

**9776**  
**9777**  
**9778**

### PHOTOMETRY

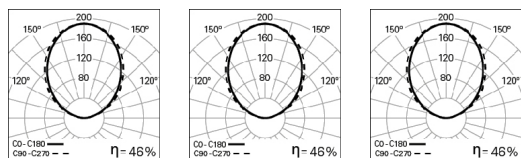

OREO Linea Up  
1514mm bLINE 4000K

OREO Linea Up  
2014mm bLINE 4000K

OREO Linea Up  
1014mm bLINE 4000K

#### TO SPECIFY:

Linear LED luminaire, for suspended application. Extruded aluminium body with 35x35 mm, epoxy polyester powder coated. Available in 3 sizes (1014, 1514 and 2014 mm), with bLINE diffuser, opal polycarbonate clip-in diffuser. With indirect light. Standard version in 4000K LED, CRI>90, 60.000h lifetime (@L80, B10, Ta 25 C) and without any visible power-supply cable. Ceiling rose available as recessed mounted with trim or trimless or surface mounted, in on/off, dimmable DALI or with OmniaControl. 2700K, Tunable White and RGB White available as options. Available in 16 different colours. – as Roxo Lighting OREO Linea Up.

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.