



LED

Norms: EN 60598-1, EN 60598-2-1



PRODUCT DESCRIPTION

Areas of Application: Commercial, Business areas, Housing, Art and Culture spaces. Offices, Public buildings, Hotel and Restaurant services.

Mounting: Suspended.

Light Distribution: Direct / Indirect.

Light Source: LED 4000K, CRI>90, 60.000h life (@L80, B10, Ta 25 °C).


Optical System: Diffuser: Opal polycarbonate.

Control Gear: Not included.

Materials: Body: Extruded aluminium.

Surface Finish: Powder coated.

bLINE - Opal polycarbonate diffuser

	LED	UGR	W	Lm	V	η(%)	AxB(mm)	kg	ORDER CODE
		≤22	25	2340	24	55	Ø630x35	2	90401.L630.0
		≤22	39	3640	24	53	Ø950x35	3	90401.L950.0
		≤19	53	4940	24	55	Ø1270x35	4	90401.L127.0
		≤19	65	6110	24	52	Ø1555x35	5	90401.L155.0
		-	83	7800	24	-	Ø1970x35	6	90401.L197.0

Note:
To complete the product add suspension ceiling rose. Please order separately. Suspension kit is included in the product (1,5 m).
In the option RGBW, the product mandatorily includes the transparent current supply cable.


Example code for order: 90401.L630.0 (ORDER CODE) + W(COLOUR/FINISH) + 2000(OPTIONS)

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

COLOUR / FINISH

Code	Description
W	White
G	Grey
B	Black
U	Blue
V	Green
T	Yellow
K	Red
N	Jungle
D	Golden eye
0	Sahara
L	Autumn
R	Rusty chain
C	Pure chocolate
1	Mist
9	Dark rock
I	Carbon

DIMENSIONS

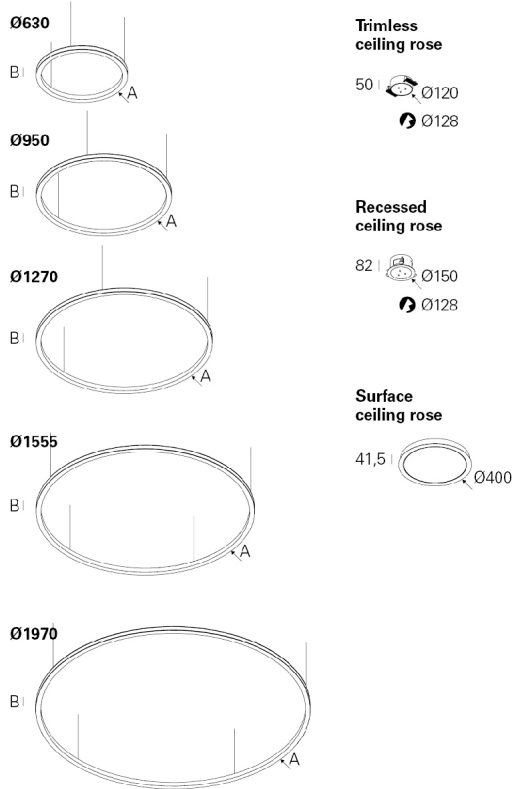

OPTIONS

Colour temperature



2700K
3000K
Tunable White (3000K - 5700K)
RGB White (2700K)

• TW and RGBW are only available with OmniaControl.

Order code
2000
3000
T000
R000

Surface ceiling rose



HF
DALI
OmniaControl (Voice/App)

• To complete this option, please add ceiling rose colour.

Order code
9752
9753
9754

Recessed ceiling rose



HF
DALI
OmniaControl (Voice/App)

• To complete this option, please add ceiling rose colour.

Order code
9755
9756
9757

Trimless ceiling rose




HF
DALI
OmniaControl (Voice/App)

• To complete this option, please add ceiling rose colour.


Order code
9758
9759
9760

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.


PHOTOMETRY




OREO Out Ø630mm
bLINE 4000K



OREO Out Ø950mm
bLINE 4000K



OREO Out Ø1270mm
bLINE 4000K



OREO Out Ø1555mm
bLINE 4000K

TO SPECIFY:

Circular LED luminaire, for horizontal suspension. Extruded aluminium body with 35x35 mm, epoxy polyester powder-coated. Available in 5 sizes (Ø630, 950, 1270, 1555 and 1970mm), with bLINE diffuser, opal polycarbonate clip-in diffuser. With outward light. Standard version in 4000K LED, CRI>90, 60.000h lifetime (@L80, B10, Ta 25 C) and without any visible power-supply cable. Ceiling rose available as recessed mounted with trim or trimless or surface mounted, in on/off, dimmable DALI or with OmniaControl. 2700K, Tunable White and RGB White available as options. Available in 16 different colours. – as Roxo Lighting OREO OUT.

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.