

Norms: EN 60598-1, EN 60598-2-1



PRODUCT DESCRIPTION

Areas of Application: Commercial and Business areas, Public buildings, Housing, Offices, Hotel and Restaurant services, Art and Culture spaces.

Mounting: Wall Mounted.

Light Distribution: Indirect.

Light Source: TC-L (2G11) lamp.

Control Gear: Electronic equipment, 220-240VAC-50/60Hz.

Materials: Body: Steel sheet.

Surface Finish: Powder coated.

| LAMP* | | W | AxBxC (mm) | Kg | HF | DSI | DALI |
|-------|------|------|-------------|-----|--------------|--------------|--------------|
| TC-L | 2G11 | 1x24 | 380x200x126 | 2 | 90012.M124.A | -- | -- |
| | 2G11 | 1x36 | 450x200x126 | 2 | 90012.M136.A | 90012.M136.C | 90012.M136.D |
| | 2G11 | 1x55 | 600x200x126 | 2,7 | 90012.M155.A | 90012.M155.C | 90012.M155.D |
| | 2G11 | 1x80 | 600x200x126 | 2,7 | 90012.M180.A | 90012.M180.C | 90012.M180.D |
| | 2G11 | 2x24 | 380x200x126 | 1,9 | 90012.M224.A | -- | -- |
| | 2G11 | 2x36 | 450x200x126 | 2,2 | 90012.M236.A | 90012.M236.C | 90012.M236.D |
| | 2G11 | 2x55 | 600x200x126 | 2,8 | 90012.M255.A | 90012.M255.C | 90012.M255.D |

COLOUR / FINISH

| Code | Description |
|------|------------------|
| W | White (RAL 9016) |
| B | Black (RAL 9005) |
| G | Grey (RAL 9006) |

OPTIONS

| Code | Description |
|------|--------------------|
| -- | Lamps as optional. |

DETAILS



Interior detail



* Lamp not included.

Example code for order: 90012.M136.D (DALI) + W (COLOUR/FINISH)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

PHOTOMETRY

DIMENSIONS

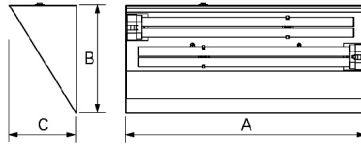

TO SPECIFY:

Wall mounted slim upright luminaire with indirect lighting effect. Single 24/36/55/80W or twin 24/36/55W TC-L lamp - as Indelague ORLY.

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.