



LED

Norms: EN 60598-1, EN 60598-2-1



**PRODUCT DESCRIPTION**

**Areas of Application:** Commercial and Business areas, Public buildings, Housing, Offices, Art and Culture spaces.

**Mounting:** Wall Mounted.

**Light Source:** LED 4000K, CRI>80, 50.000h life (@L80, B10, Ta 25 C).


**Optical System:** Diffuser: Opal polycarbonate.

**Control Gear:** LED driver, 220-240VAC-50/60Hz.

**Materials:** Body: Steel sheet.

**Surface Finish:** Powder coated.

DOZ - Opal polycarbonate diffuser

| LED  | W  | Lm   | Lm/W | η(%) | AxBxC(mm)   | kg  | HF           | DALI         |
|--|----|------|------|------|-------------|-----|--------------|--------------|
|  | 23 | 2580 | 91   | 81   | 300x200x125 | 1,6 | 90366.L020.E | 90366.L020.H |
|  | 37 | 5160 | 117  | 84   | 600x200x125 | 2,7 | 90366.L036.E | 90366.L036.H |


**COLOUR / FINISH**

| Code                       | Description |
|----------------------------|-------------|
| <input type="checkbox"/> W | White       |
| <input type="checkbox"/> G | Grey        |
| <input type="checkbox"/> B | Black       |

Other colours under request.

**OPTIONS**


Colour temperature



3000K

Order code  
3000


**DIMENSIONS**

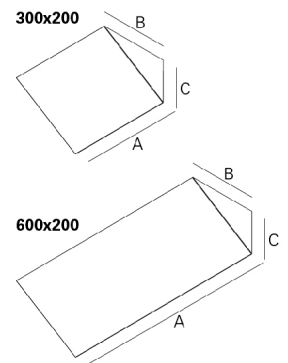


Example code for order: 90366.L020.H (DALI) + W (COLOUR/FINISH) + 3000 (OPTIONS)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

PHOTOMETRY



**ORLY LED 23W  
DOZ 4000K**



**ORLY LED 37W  
DOZ 4000K**

**TO SPECIFY:**

LED wall mounted luminaire. Standard total luminous flux of 2580 or 5160 lm, 4000K, CRI>80 and 50.000h lifetime (@L80, B10, Ta 25 C). Opal polycarbonate diffuser for a homogeneous wall illumination through uniform indirect light distribution. Optional DALI dimmable driver and 3000K. - as Indelague ORLY LED.

We reserve the right to make technical changes without prior notice.  
Electrical/Optical data are subjected to a tolerance of +/-10%.