



LED

Norms: EN 60598-1, EN 60598-2-1



PRODUCT DESCRIPTION

Areas of Application: Commercial and Business areas, Public buildings, Housing, Offices, Art and Culture spaces.

Mounting: Wall Mounted.

Light Source: LED 4000K, CRI>80, 50.000h life (@L80, B10, Ta 25 C).


Optical System: Diffuser: Opal polycarbonate.

Control Gear: LED driver, 220-240VAC-50/60Hz.

Materials: Body: Steel sheet.

Surface Finish: Powder coated.

DOZ - Opal polycarbonate diffuser


LED	W	Lm	Lm/W	η(%)	AxBxC(mm)	kg	HF	DALI
	23	2580	91	81	300x200x125	1,6	90366.L020.E	90366.L020.H
	37	5160	117	84	600x200x125	2,7	90366.L036.E	90366.L036.H

COLOUR / FINISH

Code	Description
<input type="checkbox"/> W	White
<input type="checkbox"/> G	Grey
<input type="checkbox"/> B	Black
Other colours under request.	

OPTIONS


Colour temperature



3000K

Order code
3000

DIMENSIONS

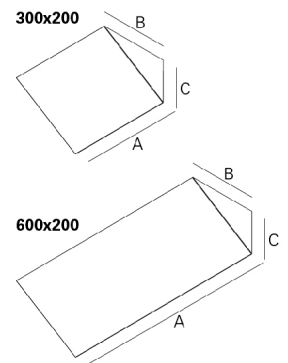

Example code for order: 90366.L020.H (DALI) + W (COLOUR/FINISH) + 3000 (OPTIONS)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

