

LED



Norms: EN 60598-1, EN 60598-2-1



IP 20

230V/50Hz

PRODUCT DESCRIPTION

Areas of Application: Industrial areas, commercial areas.

Mounting: Suspended.

Light Distribution: Direct.

Light Source: LED 4000K, CRI>80, 50.000h life.

Control Gear: LED driver, 220-240VAC-50/60Hz.

Wiring: Three-circuit with WAGO 7-pole KIT connectors.

Materials: Body: Extruded 2mm thickness aluminium profile.

Surface Finish: Powder coated in white (RAL9016).

Symmetric gear tray



LED	W	Lm	Lm/W	η(%)	AxB (mm)	HF	DALI
	52	7615	139	99	1435x64	9V0P.152.00.F4	9V0P.152.00.E4
	65	9260	134	99	1435x64	9V0P.165.00.F4	9V0P.165.00.E4

Todas las bandejas electrificadas incluyen 1 conector WAGO macho.


Double asymmetric gear tray



LED	W	Lm	Lm/W	η(%)	AxB (mm)	HF	DALI
	52	7615	118	84	1435x64	9V6X.152.00.F4	9V6X.152.00.E4
	65	9260	113	85	1435x64	9V6X.165.00.F4	9V6X.165.00.E4

Todas las bandejas electrificadas incluyen 1 conector WAGO macho.

DIMENSIONS

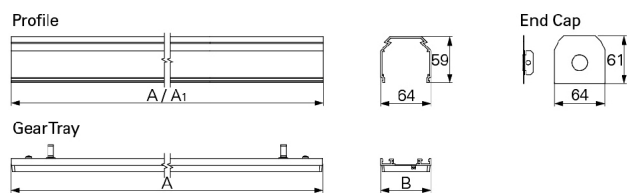

Profile 3m length

A1(mm)


2870

Example code for order: (2x) 960105 + (4x) 9V0P.152.00.E4 (DALI) + 920000 + 930000 + (2x) 910103 + 940900 (CONTINUOUS-ROW SYSTEM OPTIONS)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

CONTINUOUS-ROW SYSTEM OPTIONS

Profile unwired



1,5m profile unwired
3m profile unwired

- Aluminium profile without wiring.

Order code
950000
950001

1,5m through-wiring



5x1,5mm2
7x1,5mm2
5x2,5mm2
7x2,5mm2

- 1,5m through-wiring, with 2x 7-pole WAGO + 1x WAGO female for power.
- 1x galvanised steel sheet plate for fixing wires.

Order code
945002
945004
945003
945005

3m through-wiring



5x1,5mm2
7x1,5mm2
5x2,5mm2
7x2,5mm2

- 3m through-wiring, with 2x 7-pole WAGO + 2x WAGO female for power.
- 3x galvanised steel sheet plates for fixing wires.

Order code
945102
945104
945103
945105

1,5m profiles pre-wired



5x1,5mm2
7x1,5mm2
5x2,5mm2
7x2,5mm2

- Aluminium profiles are factory pre-wired.

Order code
960002
960004
960003
960005

3m profiles pre-wired



5x1,5mm2
7x1,5mm2
5x2,5mm2
7x2,5mm2

- Aluminium profiles are factory pre-wired.

Order code
960102
960104
960103
960105

Start Kit



Start Kit

- 2 end caps and one 7-pole WAGO connector.

Order code
920000

Body connector KIT



Body connector KIT

- One galvanised connector, includes screws.

Order code
930000

Suspension



Fixing clamps for threaded rod
Fixing clamps + pigtail hook
Fixing clamps + height-adjustable
Fixing clamps + hook for wire suspensions

- Includes two fixing clamps.

Order code
910102
910101
910103
910100

Current supply cable



1,5m - Current cable 1,5 mm2
5 x 1,5 mm2
7 x 1,5 mm2
3m - Current cable 1,5 mm2
5 x 1,5 mm2
7 x 1,5 mm2
6m - Current cable 1,5 mm2
5 x 1,5 mm2
7 x 1,5 mm2

Order code
940800
940900
940801
940901
940802
940902

Blanking cover



1 piece, length 1,5 m


- White powder-coated blanking cover.

Order code
990000


We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

PHOTOMETRY


PAS LED 52W
LED




PAS LED 65W
LED



PAS LED 52W D. Assim
LED



PAS LED 65W D. Assim
LED



TO SPECIFY:

LED aluminium trunking system with total luminous flux of 7615/18520lm.
Aluminium profile with clip-in mechanism which enables tool-free installation into luminaire. Pre-wired or unwired profile with 5/7-pole in modular distance through-wiring (1,5 or 2,5mm2). Optional 3000K - as Indelague PAS LED.

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.