

LED



Norms: EN 60598-1, EN 60598-2-1



IP 20

230V/50Hz

### PRODUCT DESCRIPTION

**Areas of Application:** Industrial areas, commercial areas.

**Mounting:** Suspended.

**Light Distribution:** Direct.

**Light Source:** LED 4000K, CRI>80, 50.000h life.

**Control Gear:** LED driver, 220-240VAC-50/60Hz.

**Wiring:** Three-circuit with WAGO 7-pole KIT connectors.

**Materials:** Body: Extruded 2mm thickness aluminium profile.

**Surface Finish:** Powder coated in white (RAL9016).

#### Symmetric gear tray



LED	W	Lm	Lm/W	η(%)	AxB (mm)	HF	DALI
	52	7615	139	99	1435x64	9V0P.152.00.F4	9V0P.152.00.E4
	65	9260	134	99	1435x64	9V0P.165.00.F4	9V0P.165.00.E4

Todas las bandejas electrificadas incluyen 1 conector WAGO macho.


#### Double asymmetric gear tray



LED	W	Lm	Lm/W	η(%)	AxB (mm)	HF	DALI
	52	7615	118	84	1435x64	9V6X.152.00.F4	9V6X.152.00.E4
	65	9260	113	85	1435x64	9V6X.165.00.F4	9V6X.165.00.E4

Todas las bandejas electrificadas incluyen 1 conector WAGO macho.

### DIMENSIONS

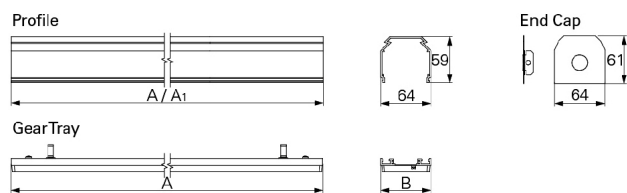

Profile 3m length

**A1(mm)**


2870

Example code for order: (2x) 960105 + (4x) 9V0P.152.00.E4 (DALI) + 920000 + 930000 + (2x) 910103 + 940900 (CONTINUOUS-ROW SYSTEM OPTIONS)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

### CONTINUOUS-ROW SYSTEM OPTIONS

#### Profile unwired



1,5m profile unwired  
3m profile unwired

- Aluminium profile without wiring.

Order code  
**950000**  
**950001**

#### 1,5m through-wiring



5x1,5mm2  
7x1,5mm2  
5x2,5mm2  
7x2,5mm2

- 1,5m through-wiring, with 2x 7-pole WAGO + 1x WAGO female for power.
- 1x galvanised steel sheet plate for fixing wires.

Order code  
**945002**  
**945004**  
**945003**  
**945005**

#### 3m through-wiring



5x1,5mm2  
7x1,5mm2  
5x2,5mm2  
7x2,5mm2

- 3m through-wiring, with 2x 7-pole WAGO + 2x WAGO female for power.
- 3x galvanised steel sheet plates for fixing wires.

Order code  
**945102**  
**945104**  
**945103**  
**945105**

#### 1,5m profiles pre-wired



5x1,5mm2  
7x1,5mm2  
5x2,5mm2  
7x2,5mm2

- Aluminium profiles are factory pre-wired.

Order code  
**960002**  
**960004**  
**960003**  
**960005**

#### 3m profiles pre-wired



5x1,5mm2  
7x1,5mm2  
5x2,5mm2  
7x2,5mm2

- Aluminium profiles are factory pre-wired.

Order code  
**960102**  
**960104**  
**960103**  
**960105**

#### Start Kit



- Start Kit
- 2 end caps and one 7-pole WAGO connector.

Order code  
**920000**

#### Body connector KIT



Body connector KIT

- One galvanised connector, includes screws.

Order code  
**930000**

#### Suspension



Fixing clamps for threaded rod  
Fixing clamps + pigtail hook  
Fixing clamps + height-adjustable  
Fixing clamps + hook for wire suspensions

- Includes two fixing clamps.

Order code  
**910102**  
**910101**  
**910103**  
**910100**

#### Current supply cable



1,5m - Current cable 1,5 mm2  
5 x 1,5 mm2  
7 x 1,5 mm2  
3m - Current cable 1,5 mm2  
5 x 1,5 mm2  
7 x 1,5 mm2  
6m - Current cable 1,5 mm2  
5 x 1,5 mm2  
7 x 1,5 mm2

Order code  
**940800**  
**940900**  
**940801**  
**940901**  
**940802**  
**940902**

#### Blanking cover



1 piece, length 1,5 m


- White powder-coated blanking cover.

Order code  
**990000**


We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

PHOTOMETRY


PAS LED 52W  
LED




PAS LED 65W  
LED



PAS LED 52W D. Assim  
LED



PAS LED 65W D. Assim  
LED



TO SPECIFY:

LED aluminium trunking system with total luminous flux of 7615/18520lm.  
Aluminium profile with clip-in mechanism which enables tool-free installation into luminaire. Pre-wired or unwired profile with 5/7-pole in modular distance through-wiring (1,5 or 2,5mm2). Optional 3000K - as Roxo Lighting PAS LED.

We reserve the right to make technical changes without prior notice.  
Electrical/Optical data are subjected to a tolerance of +/-10%.