

LED



Norms: EN 60598-1, EN 60598-2-1



IP 20

bLINE 960°C

bGLARE 650°C

230V/50Hz

PRODUCT DESCRIPTION

Areas of Application: Commercial and Business areas, Public buildings, Housing, Offices, Hotel and Restaurant services, Art and Culture spaces.

Mounting: Surface/Suspended.

Light Distribution: Direct.

Light Source: LED 4000K, CRI>80, 50.000h life (@L80, B10, Ta 25 C).

Control Gear: LED driver, 220-240VAC-50/60Hz.

Materials: Body: Extruded aluminium profile.

Surface Finish: Anodised in natural colour.

bGLARE - Microprismatic diffuser (middle)



LAMP	UGR	W	lm	lm/W	η(%)	AxBxC (mm)	K1	K3	lg	HF	DALI
LED	≤19	24	3039	80	63	842x65x80	-	-	2,5	90338.L130.E	90338.L130.H
	≤19	30	4052	88	65	1122x65x80	-	-	3,0	90338.L140.E	90338.L140.H
	≤19	37	5065	88	64	1402x65x80	•	•	3,5	90338.L150.E	90338.L150.H
	≤19	42	6078	91	63	1682x65x80	•	•	5,0	90338.L160.E	90338.L160.H
	-	49	7091	93	64	1964x65x80	•	•	5,5	90338.L170.E	90338.L170.H
	-	61	8104	85	64	2244x65x80	•	•	6,0	90338.L180.E	90338.L180.H
	-	67	9117	88	65	2524x65x80	•	•	6,5	90338.L190.E	90338.L190.H
	-	74	10130	88	64	2804x65x80	•	•	7,0	90338.L100.E	90338.L100.H

Add suffix to order: Start - 00000.0000.0.0049 End - 00000.0000.0.0050

bLINE - Opal polycarbonate diffuser (middle)



LAMP	UGR	W	lm	lm/W	η(%)	AxBxC (mm)	K1	K3	kg	HF	DALI
LED	≤25	30	3870	84	65	842x65x80	-	-	2,5	90198.L130.E	90198.L130.H
	≤25	39	5460	90	68	1122x65x80	-	-	3,0	90198.L140.E	90198.L140.H
	≤25	47	6450	88	64	1402x65x80	•	•	3,5	90198.L150.E	90198.L150.H
	≤25	56	7740	90	65	1682x65x80	•	•	5,0	90198.L160.E	90198.L160.H
	-	64	9030	95	67	1964x65x80	•	•	5,5	90198.L170.E	90198.L170.H
	-	77	10320	87	65	2244x65x80	•	•	6,0	90198.L180.E	90198.L180.H
	-	86	11610	89	66	2524x65x80	•	•	6,5	90198.L190.E	90198.L190.H
	-	94	12900	88	64	2804x65x80	•	•	7,0	90198.L100.E	90198.L100.H

Add suffix to order: Start - 00000.0000.0.0049 End - 00000.0000.0.0050

Please note:

- To complete a line, start kit will be necessary. Please order separately.
- Dimensions without end caps, please add 6mm to complete the line.


Example code for order: 90338.L150.E.0049 (START) + 90338.L150.E (MIDDLE) + 90338.L150.E.0050 (END) + 3000 + 920700 + (2x) 9460 + (2x) 965200 + (2x) 930500 + 971400 + 940100 + (3x) 910409 + K3 (OPTIONS)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

COLOUR / FINISH


Code	Description
W	White
B	Black

DIMENSIONS

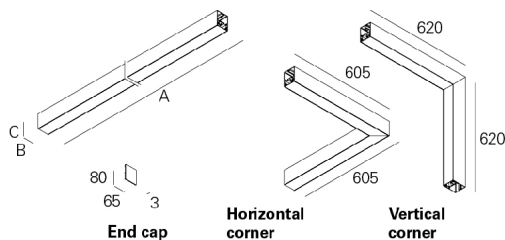

OPTIONS


Colour temperature



3000K
Tunable white

Order code
3000
T000


Start Kit



Start kit
• Two end caps included.

Order code
920700

Through-wiring



1,5 mm² through-wiring
3 x 1,5 mm²
5 x 1,5 mm²
7 x 1,5 mm²
9 x 1,5 mm²
2,5 mm² through-wiring
3 x 2,5 mm²
5 x 2,5 mm²
7 x 2,5 mm²
9 x 2,5 mm²

Order code
9456
9457
9460
9486
9458
9459
9461
9487

Connectors



KIT 7-pole WAGO (male and female)
Connector 7-pole WAGO male
Connector 7-pole WAGO female

Order code
965200
965201
965202

Body connector KIT



Body connector
• Galvanised connector, includes screws.

Order code
930500

Light corners (bGLARE)




Horizontal corner
30W HF
30W DALI
Vertical corner
30W HF
30W DALI

Order code
90338.H210.E
90338.H210.H
90338.V210.E
90338.V210.H

• LED light corner luminaire includes complete gear tray with non-Dimmable or DALI LED driver and bGLARE polycarbonate diffuser.

Light corners (bLINE)



Horizontal corner
39W HF
39W DALI
Vertical corner
39W HF
39W DALI

Order code
90198.H210.E
90198.H210.H
90198.V210.E
90198.V210.H

• LED light corner luminaire includes complete gear tray with non-Dimmable or DALI LED driver and bLINE diffuser.

Ceiling rose



Recessed
Grey
White
Black
Surface
Grey
White
Black

Order code
971402
971400
971401
971702
971700
971701

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

Current supply cable



	Order code
1,5 m transparent cable 0,75 mm ²	
3 x 0,75 mm ²	940400
5 x 0,75 mm ²	940500
1,5 m transparent cable 1,5 mm ²	
3 x 1,5 mm ²	940300
5 x 1,5 mm ²	940000
7 x 1,5 mm ²	940100
9 x 1,5 mm ²	941200

Suspension



	Order code
Suspension Type "I" (x2)	910409
Suspension Type "I" (x1)	910408

Blank parts



	Order code
1,5m length	991300
3m length	991301

• Includes empty aluminium body and blanking cover.

Emergency unit



	Order code
Emergency unit 3 hours	K3
Emergency unit 1 hour	K1

• Test function by telecommand signal.

Low power version



Option supplied under request.

Bespoke projects



Option supplied under request.


DETAILS



Clip-in diffuser system




Suspension detail




End caps without visible screws

PHOTOMETRY



REBA 65 LED Line 30W
bGLARE 4000K



REBA 65 LED Line 39W
bLINE 4000K

TO SPECIFY:

Linear surface or suspended LED luminaire for continuous line and 65 mm width. Extruded aluminium profile, anodised in natural colour. Polycarbonate end caps without visible screws and polycarbonate bLINE or bGLARE diffuser. Standard version with 4000K, CRI>80 and 50.000h lifetime (@L80, B10, Ta 25 C). Optional 3000K, DALI dimmable driver, TunableWhite technology, connectors, light corners and 1 or 3 hours emergency unit. Suspension kit, current supply cable and ceiling rose as accessories. – as Roxo Lighting REBA 65 LED Line

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.