

LED

Norms: EN 60598-1, EN 60598-2-1



IP 20

bGLARE
650°C

bLINE
960°C

230V/50Hz

PRODUCT DESCRIPTION

Areas of Application: Commercial and Business areas, Public buildings, Housing, Offices, Hotel and Restaurant services, Art and Culture spaces.

Mounting: Surface/Suspended.

Light Distribution: Direct.

Light Source: LED 4000K, CRI>80, 50.000h life (@L80, B10, Ta 25 C).

Control Gear: LED driver, 220-240VAC-50/60Hz.

Materials: Body: Extruded aluminium profile.

Surface Finish: Anodised in natural colour.

bGLARE - Microprismatic polycarbonate diffuser (middle)



LED	UGR	W	Lm	Lm/W	η(%)	AxBxC (mm)	Kg	HF	DALI
	≤19	24	3039	76	60	842x50x70	1,9	90113.L130.E	90113.L130.H
	≤19	30	4052	82	61	1122x50x70	2,4	90113.L140.E	90113.L140.H
	≤22	37	5065	83	60	1402x50x70	2,8	90113.L150.E	90113.L150.H
	≤22	42	6078	88	61	1682x50x70	3,8	90113.L160.E	90113.L160.H
-	-	54	7091	80	61	1964x50x70	4,3	90113.L170.E	90113.L170.H
-	-	61	8104	81	61	2244x50x70	4,7	90113.L180.E	90113.L180.H
-	-	67	9117	83	61	2524x50x70	5,2	90113.L190.E	90113.L190.H
-	-	74	10130	82	60	2804x50x70	5,6	90113.L100.E	90113.L100.H

bLINE - Opal polycarbonate diffuser (middle)



LED	UGR	W	Lm	Lm/W	η(%)	AxBxC (mm)	Kg	HF	DALI
	≤25	30	3870	75	58	842x50x70	1,9	90194.L130.E	90194.L130.H
	≤25	39	5160	78	59	1122x50x70	2,4	90194.L140.E	90194.L140.H
	≤25	47	6450	80	58	1402x50x70	2,8	90194.L150.E	90194.L150.H
	≤25	56	7740	80	58	1682x50x70	3,8	90194.L160.E	90194.L160.H
-	-	64	9030	83	59	1964x50x70	4,3	90194.L170.E	90194.L170.H
-	-	77	10320	78	58	2244x50x70	4,7	90194.L180.E	90194.L180.H
-	-	86	11610	79	59	2524x50x70	5,2	90194.L190.E	90194.L190.H
-	-	94	12900	80	58	2804x50x70	5,6	90194.L100.E	90194.L100.H

Add suffix to order: Start - 00000.0000.0.0049 End - 00000.0000.0.0050

- To complete a line, start kit will be necessary. Please order separately.
- Dimensions without end caps, please add 6mm to complete the line.

COLOUR / FINISH

Code	Description
W	White


Example code for order: 90194.L150.H.0049 (START) + 90194.L150.H (MIDDLE) + 90194.L150.H.0050 (END) + 3000 + 920603 + (2x) 9457 + (2x) 965100 + (2x) 930200 + (3x) 910409 + 940500 + 971700 (OPTIONS)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

COLOUR / FINISH


Code	Description
■ B	Black

DIMENSIONS

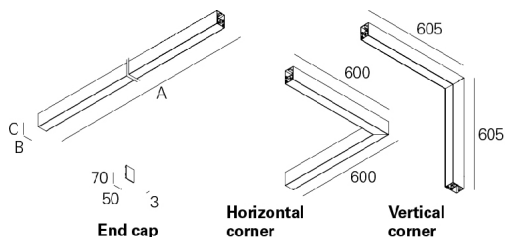

OPTIONS


Colour temperature



3000K
Tunable white

Order code
3000
T000


Start kit



Start kit
• Two end caps included

Order code
920603

Through-wiring



1,5 mm² through-wiring
3 x 1,5 mm²
5 x 1,5 mm²
2,5 mm² through-wiring
3 x 2,5 mm²
5 x 2,5 mm²

Order code
9456
9457
9458
9459

Connectors



KIT 3-pole Mini Wieland GST15i3 (male and female) **965000**
Connector 3-pole Mini Wieland GST15i3 male **965001**
Connector 3-pole Mini Wieland GST15i3 female **965002**
KIT 5-pole Mini Wieland GST15i5 DIM (male and female) **965100**
Connector 5-pole Mini Wieland GST15i5 DIM male **965101**
Connector 5-pole Mini Wieland GST15i5 DIM female **965102**

Order code
965000
965001
965002
965100
965101
965102

Body connector KIT



Body connector
• Galvanised connector, includes screws.

Order code
930200

Ceiling rose



Square recessed
Grey **971402**
White **971400**
Black **971401**
Square surface
Grey **971702**
White **971700**
Black **971701**

Order code
971402
971400
971401
971702
971700
971701

Current supply cable



1,5 m transparent current cable 0,75 mm²
3 x 0,75 mm² **940400**
5 x 0,75 mm² **940500**
1,5 m transparent current cable 1,5 mm²
3 x 1,5 mm² **940300**
5 x 1,5 mm² **940000**

Order code
940400
940500
940300
940000

Suspension



Suspension Type "I" (x2) **910409**
Suspension Type "I" (x1) **910408**

Order code
910409
910408

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

Blank parts



1,5m length
3m length

• Includes empty aluminium body and blanking cover.

Order code
991100
991101

Emergency unit



Option supplied under request.

Bespoke projects




Option supplied under request.

Low power option



Option supplied under request.

Light corners (bGLARE)



Horizontal
30W HF
30W DALI
Vertical
30W HF
30W DALI

Order code
90137.H210.E
90137.H210.H
90137.V210.E
90137.V210.H

• LED light corner luminaire includes complete gear tray with non-Dimmable or DALI LED driver and bGLARE polycarbonate diffuser.

Light corners (bLINE)



Horizontal
39W HF
39W DALI
Vertical
39W HF
39W DALI

Order code
90194.H210.E
90194.H210.H
90194.V210.E
90194.V210.H

• LED light corner luminaire includes complete gear tray with non-Dimmable or DALI LED driver and bLINE diffuser.

DETAILS



Clip-in diffuser system




Suspension detail




End caps without visible screws

PHOTOMETRY



REBA LED Line 30W
bGLARE 4000K



REBA LED Line 39W
bLINE 4000K

TO SPECIFY:

Linear surface or suspended LED luminaire for continuous line and 50 mm width. Extruded aluminium profile, anodised in natural colour. Polycarbonate end caps without visible screws and polycarbonate bLINE diffuser or bGLARE diffuser. Standard version with 4000K, CRI>80 and 50.000h lifetime (@L80, B10, Ta 25 C). Optional 3000K, DALI dimmable driver, TunableWhite technology and light corners. Suspension kit, current supply cable, connectors and ceiling rose as accessories. – as Indelague REBA LED Line.

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.