



LED

Norms: EN 60598-1, EN 60598-2-2



230V/50Hz

PRODUCT DESCRIPTION

Areas of Application: Commercial, Business areas, Housing, Art and Culture spaces. Offices, Public buildings, Hotel and Restaurant services.

Mounting: Recessed.

Light Distribution: Direct / Indirect.

Light Source: LED 4000K, RG1, CRI>80, MacAdam Step <3, 80.000h lifetime (@L90, B10, Ta25 C).

Optical System: Diffuser: Microprismatic or Opal

Control Gear: LED driver, 220-240VAC-50/60Hz.

Materials: Body: Extruded aluminium and steel sheet.

Surface Finish: Powder coated.

gCONTROL+ - Microprismatic PMMA diffuser

LED	UGR	W	Lm Output	Lm/W	D (mm)	D' (mm)	K3	HF	DALI
	≤22	32	3341	104	Ø400	Ø518	-	90591.L400.E	90591.L400.H
	≤19	56	6149	110	Ø600	Ø718	•	90591.L600.E	90591.L600.H
	≤19	84	10122	121	Ø900	Ø1018	•	90591.L900.E	90591.L900.H
	≤19	137	16214	118	Ø1150	Ø1268	•	90591.L115.E	90591.L115.H

LIGHT+ - Opal PMMA diffuser


LED	UGR	W	Lm Output	Lm/W	D (mm)	D' (mm)	K3	HF	DALI
	≤25	32	3444	108	Ø400	Ø518	-	90593.L400.E	90593.L400.H
	≤22	56	6442	115	Ø600	Ø718	•	90593.L600.E	90593.L600.H
	≤22	84	10562	126	Ø900	Ø1018	•	90593.L900.E	90593.L900.H
	≤22	137	17182	125	Ø1150	Ø1268	•	90593.L115.E	90593.L115.H

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

COLOUR / FINISH


Code	Description
W	White
G	Grey
B	Black
U	Blue
V	Green
T	Yellow
K	Red
N	Jungle
D	Golden eye
O	Sahara
L	Autumn
R	Rusty chain
C	Pure chocolate
1	Mist
9	Dark rock
I	Carbon

DIMENSIONS

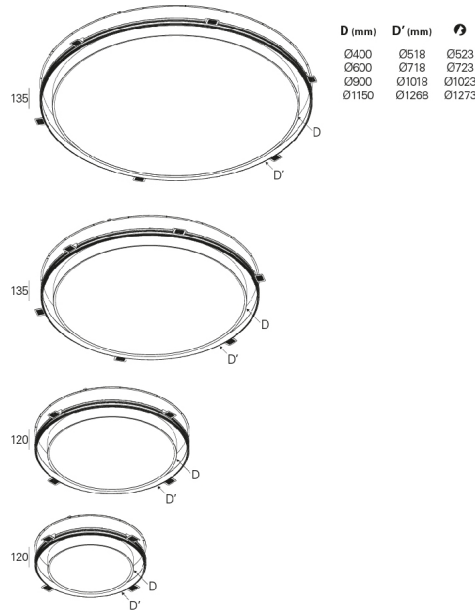

OPTIONS

Colour temperature



3000K
Tunable White

Order code
3000
T000

Emergency unit



Emergency unit 3 hours
• Prepared for Remote-control

Order Code
K3

Low output version



This option can be supplied on request

Tilted bracket



Tilted bracket
Ø400
Ø600
Ø900
Ø1150

Order Code
927100
927101
927102
927103

Safety cable




Steel safety cable

Order Code
955000

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

DETAILS



LIGHT+ diffuser



gCONTROL+ diffuser



Horizontal bracket



Tilted bracket




Horizontal bracket




Tilted bracket

PHOTOMETRY



ROFY 60 / T
HO LIGHT+



ROFY 60 / T
HO gCONTROL+

TO SPECIFY:

Trimless recessed circular LED luminaire with low height body, with direct and indirect light. Powder coated extruded aluminium body, available in 16 different colours. Available in 4 diameters 400, 600, 900 and 1150mm, with opal acrylic diffuser (PMMA) for homogenous light diffusion or with microprismatic diffuser for glare control. Standard version with 4000K LED, RG1 (Photobiological Risk Group 1, according to IEC 62471), CRI>80, 80.000 lifetime (@L80, B10, Ta 25 C). Available as option in 3000K, Tunable White (2700-6500K), with dimmable DALI driver and 3h emergency unit. – as Indelague ROFY 60 /T D/I.

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.