



LED

Norms: EN 60598-1, EN 60598-2-1



**PRODUCT DESCRIPTION**

**Areas of Application:** Commercial, Business areas, Housing, Art and Culture spaces. Offices, Public buildings, Hotel and Restaurant services.

**Mounting:** Surface/Suspended.

**Light Distribution:** Direct.

**Light Source:** LED 4000K, RG1, CRI>80, 80.000h life (@L90, B10, Ta 25 C).

**Optical System:** Diffuser: Opal or Microprismatic.

**Control Gear:** LED driver, 220-240VAC-50/60Hz.

**Materials:** Body: Extruded aluminium and steel sheet.

**Surface Finish:** Powder coated epoxy polyester.

gCONTROL+ - Microprismatic PMMA diffuser

LED	UGR	W	Lm Output	Lm/W	AxB (mm)	K3	HF	DALI
	≤19	17	1825	107	Ø300x60	-	90583.L300.E	90583.L300.H
	≤19	25	3000	120	Ø400x60	-	90583.L400.E	90583.L400.H
	≤19	44	5501	125	Ø600x60	•	90583.L600.E	90583.L600.H
	≤19	66	8778	133	Ø900x60	•	90583.L900.E	90583.L900.H
	≤19	106	14445	136	Ø1150x60	•	90583.L115.E	90583.L115.H

LIGHT+ - Opal PMMA diffuser


LED	UGR	W	Lm Output	Lm/W	AxB (mm)	K3	HF	DALI
	≤25	17	1950	115	Ø300x60	-	90585.L300.E	90585.L300.H
	≤25	25	3160	126	Ø400x60	-	90585.L400.E	90585.L400.H
	≤25	44	5883	134	Ø600x60	•	90585.L600.E	90585.L600.H
	≤25	66	9462	143	Ø900x60	•	90585.L900.E	90585.L900.H
	≤25	106	15571	147	Ø1150x60	•	90585.L115.E	90585.L115.H

We reserve the right to make technical changes without prior notice.  
Electrical/Optical data are subjected to a tolerance of +/-10%.


### COLOUR / FINISH

Code	Description
W	White
G	Grey
B	Black
U	Blue
V	Green
T	Yellow
K	Red
N	Jungle
D	Golden eye
O	Sahara
L	Autumn
R	Rusty chain
C	Pure chocolate
1	Mist
9	Dark rock
I	Carbon

### DIMENSIONS

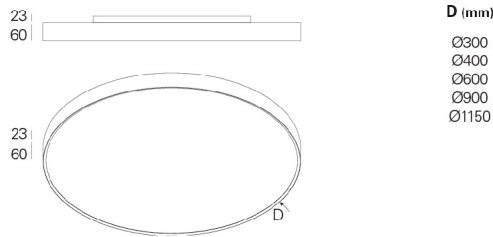

D (mm)  
 Ø300  
 Ø400  
 Ø600  
 Ø900  
 Ø1150

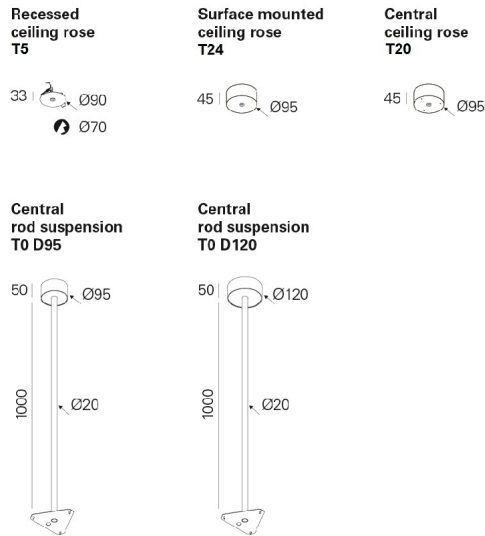

### OPTIONS


#### Colour temperature



3000K  
 Tunable White

Order code  
**3000**  
**T000**

#### Suspension rod



Suspension rod  
 Ø95 mm (Ø400-600 mm)  
 Ø120 mm (Ø900-1150 mm)

Order code  
**913000**  
**913010**

#### Ceiling rose



Ceiling rose  
 Circular surface T24  
 Circular recessed T5  
 Ceiling rose (Dali with emergency kit)  
 Circular surface T26  
 Circular recessed T27

Order Code  
**978600**  
**971300**  
**978601**  
**978700**

#### Central ceiling rose



Central ceiling rose  
 Ceiling rose T21  
 Ceiling Central rose (Dali with emergency kit)  
 Ceiling rose T28

Order code  
**977211**  
**977230**

• To order this option, please choose colour required to the ceiling rose.

• To order this option, please choose colour required to the ceiling rose

We reserve the right to make technical changes without prior notice.  
 Electrical/Optical data are subjected to a tolerance of +/-10%.

### Transparent current supply cable



Transparent current supply cable section 0,75 mm  
3 x 0,75 mm  
L1500  
L3000  
L6000  
5 x 0,75 mm  
L1500  
L3000  
L6000

Order code

**940400**  
**940401**  
**940402**  
**940500**  
**940501**  
**940507**

### Transparent current supply cable



Transparent current supply cable section 0,75 mm  
7 x 0,75 mm  
L1500  
L3000  
L6000

Order code

**940600**  
**940601**  
**940602**

• For dimmable Dali with emergency unit and with remote-control, it is necessary to order 2 current supply cables of 5 x 0,75 mm .

### Suspension



Suspension S10 1,5m (x3)  
Suspension S10 3m (x3)  
Suspension S10 6m (x3)

Order Code

**9111001**  
**9111002**  
**9111003**

### Emergency unit



Emergency unit 3 hours

Order Code

**K3**

• Prepared for Remote-control

### Low output version



This option can be supplied on request

### DETAILS



gCONTROL+ diffuser



LIGHT+ diffuser



Wall mounted application



Ceiling surface application




Suspended application for central ceiling rose



Central ceiling rose




Suspended application with external perpendicular suspensions



Recessed ceiling rose




Suspended application with internal perpendicular suspensions



Recessed ceiling rose with perpendicular suspensions



Central ceiling rose with internal perpendicular suspensions



Suspension rod



Suspension rod application




Surface ceiling rose T26




Recessed ceiling rose T27

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

PHOTOMETRY



ROFY 60  
HO LIGHT+



ROFY 60  
HO gCONTROL+

TO SPECIFY:

Surface (wall and ceiling) or suspended circular LED luminaire with low height body. Powder coated extruded aluminium body, available in 16 different colours. Available in 5 diameters 400, 600, 900 and 1150mm, with opal acrylic diffuser (PMMA) for homogenous light diffusion or with microprismatic diffuser for glare control. Standard version with 4000K LED, RG1 (Photobiological Risk Group 1, according to IEC 62471), CRI>80, 80.000 lifetime (@L80, B10, Ta 25 C). Available as option in 3000K, Tunable White (2700-6500K), with dimmable DALI driver, 3h emergency unit, S10 suspension and transparent current supply cable. Possible to choose between recessed ceiling rose T5 D90 or surface mounted ceiling rose T24 D95 and central surface mounted ceiling rose T21. – as Indelague ROFY 60.

We reserve the right to make technical changes without prior notice.  
Electrical/Optical data are subjected to a tolerance of +/-10%.