



LED

Norms: EN 60598-1, EN 60598-2-1



PRODUCT DESCRIPTION

Areas of Application: Commercial, Business areas, Housing, Art and Culture spaces. Offices, Public buildings, Hotel and Restaurant services.

Mounting: Surface/Suspended.

Light Distribution: Direct.

Light Source: LED 4000K, RG1, CRI>80, 80.000h life (@L90, B10, Ta 25 C).

Optical System: Diffuser: Opal or Microprismatic.

Control Gear: LED driver, 220-240VAC-50/60Hz.

Materials: Body: Extruded aluminium and steel sheet.

Surface Finish: Powder coated epoxy polyester.

gCONTROL+ - Microprismatic PMMA diffuser

LED	UGR	W	Lm Output	Lm/W	AxB (mm)	K3	HF	DALI
	≤19	17	1825	107	Ø300x60	-	90583.L300.E	90583.L300.H
	≤19	25	3000	120	Ø400x60	-	90583.L400.E	90583.L400.H
	≤19	44	5501	125	Ø600x60	•	90583.L600.E	90583.L600.H
	≤19	66	8778	133	Ø900x60	•	90583.L900.E	90583.L900.H
	≤19	106	14445	136	Ø1150x60	•	90583.L115.E	90583.L115.H

LIGHT+ - Opal PMMA diffuser


LED	UGR	W	Lm Output	Lm/W	AxB (mm)	K3	HF	DALI
	≤25	17	1950	115	Ø300x60	-	90585.L300.E	90585.L300.H
	≤25	25	3160	126	Ø400x60	-	90585.L400.E	90585.L400.H
	≤25	44	5883	134	Ø600x60	•	90585.L600.E	90585.L600.H
	≤25	66	9462	143	Ø900x60	•	90585.L900.E	90585.L900.H
	≤25	106	15571	147	Ø1150x60	•	90585.L115.E	90585.L115.H

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.


COLOUR / FINISH

Code	Description
W	White
G	Grey
B	Black
U	Blue
V	Green
T	Yellow
K	Red
N	Jungle
D	Golden eye
O	Sahara
L	Autumn
R	Rusty chain
C	Pure chocolate
1	Mist
9	Dark rock
I	Carbon

DIMENSIONS

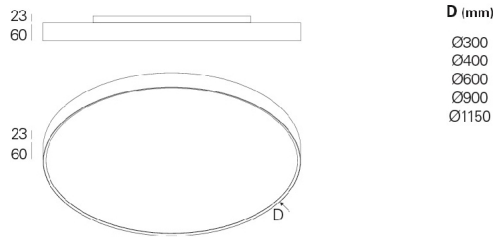

D (mm)
 Ø300
 Ø400
 Ø600
 Ø900
 Ø1150

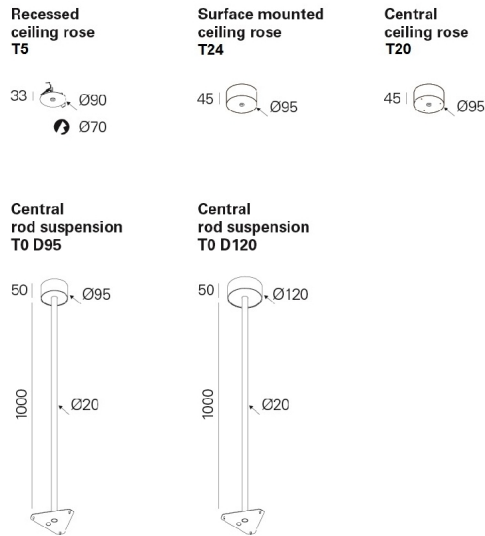

OPTIONS


Colour temperature



3000K
 Tunable White

Order code
3000
T000

Suspension rod



Suspension rod
 Ø95 mm (Ø400-600 mm)
 Ø120 mm (Ø900-1150 mm)

Order code
913000
913010

Ceiling rose



Ceiling rose
 Circular surface T24
 Circular recessed T5
 Ceiling rose (Dali with emergency kit)
 Circular surface T26
 Circular recessed T27

Order Code
978600
971300
978601
978700

Central ceiling rose



Central ceiling rose
 Ceiling rose T21
 Ceiling Central rose (Dali with emergency kit)
 Ceiling rose T28


Order code
977211
977230

• To order this option, please choose colour required to the ceiling rose.


• To order this option, please choose colour required to the ceiling rose

We reserve the right to make technical changes without prior notice.
 Electrical/Optical data are subjected to a tolerance of +/-10%.

Transparent current supply cable


	Transparent current supply cable section 0,75 mm	Order code
	3 x 0,75 mm	
	L1500	940400
	L3000	940401
	L6000	940402
	5 x 0,75 mm	
	L1500	940500
L3000	940501	
L6000	940507	

Transparent current supply cable


	Transparent current supply cable section 0,75 mm	Order code
	7 x 0,75 mm	
	L1500	940600
	L3000	940601
	L6000	940602

• For dimmable Dali with emergency unit and with remote-control, it is necessary to order 2 current supply cables of 5 x 0,75 mm .

Suspension


	Suspension S10 1,5m (x3)	Order Code
	Suspension S10 3m (x3)	9111001
	Suspension S10 6m (x3)	9111002
		9111003

Emergency unit


	Emergency unit 3 hours	Order Code
		K3

• Prepared for Remote-control

Low output version

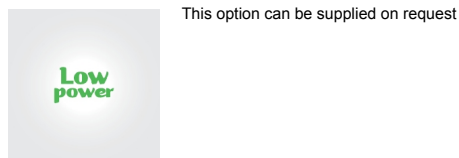


DETAILS

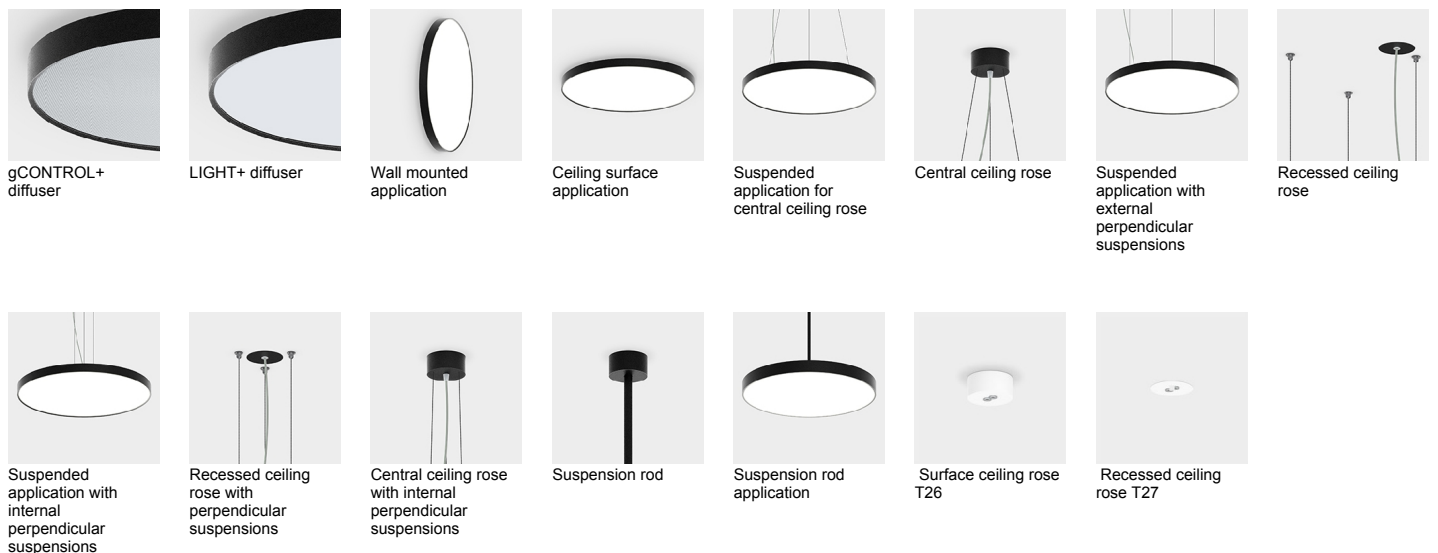


We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

PHOTOMETRY



ROFY 60
HO LIGHT+



ROFY 60
HO gCONTROL+

TO SPECIFY:

Surface (wall and ceiling) or suspended circular LED luminaire with low height body. Powder coated extruded aluminium body, available in 16 different colours. Available in 5 diameters 400, 600, 900 and 1150mm, with opal acrylic diffuser (PMMA) for homogenous light diffusion or with microprismatic diffuser for glare control. Standard version with 4000K LED, RG1 (Photobiological Risk Group 1, according to IEC 62471), CRI>80, 80.000 lifetime (@L80, B10, Ta 25 C). Available as option in 3000K, Tunable White (2700-6500K), with dimmable DALI driver, 3h emergency unit, S10 suspension and transparent current supply cable. Possible to choose between recessed ceiling rose T5 D90 or surface mounted ceiling rose T24 D95 and central surface mounted ceiling rose T21. – as Roxo Lighting ROFY 60.

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.