



LED

Norms: EN 60598-1, EN 60598-2-1



PRODUCT DESCRIPTION

Areas of Application: Commercial, Business areas, Housing, Art and Culture spaces. Offices, Public buildings, Hotel and Restaurant services.

Mounting: Suspended.

Light Distribution: Direct / Indirect.

Light Source: LED 4000K, RG1, CRI>80, MacAdam Step <3, 80.000h lifetime (@L90, B10, Ta25 C).


Optical System: Diffuser: Microprismatic or Opal

Control Gear: LED driver, 220-240VAC-50/60Hz.


Materials: Body: Extruded aluminium and steel sheet.

Surface Finish: Powder coated.

gCONTROL+ - Microprismatic PMMA diffuser

LED	UGR	W	Lm Output	Lm/W	AxB (mm)	K3	kg	HF	DALI
	≤<19	32	3752	117	Ø400x85	-	-	90624.L400.E	90624.L400.H
	≤<19	56	7320	131	Ø600x85	•	-	90624.L600.E	90624.L600.H
	≤<19	84	11443	136	Ø900x85	•	-	90624.L900.E	90624.L900.H
	≤<19	137	19118	140	Ø1150x85	•	-	90624.L115.E	90624.L115.E

LIGHT+ - opal polycarbonate diffuser


LED	UGR	W	Lm Output	Lm/W	AxB (mm)	K3	kg	HF	DALI
	≤<25	32	4009	125	Ø400x85	-	-	90623.L400.E	90623.L400.H
	≤<25	56	7613	136	Ø600x85	•	-	90623.L600.E	90623.L600.H
	≤<22	84	11883	141	Ø900x85	•	-	90623.L900.E	90623.L900.H
	≤<22	137	19844	145	Ø1150x85	•	-	90623.L115.E	90623.L115.H

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

COLOUR / FINISH

Code	Description
W	White
G	Grey
B	Black
U	Blue
V	Green
T	Yellow
K	Red
N	Jungle
D	Golden eye
O	Sahara
L	Autumn
R	Rusty chain
C	Pure chocolate
1	Mist
9	Dark rock
I	Carbon

DIMENSIONS

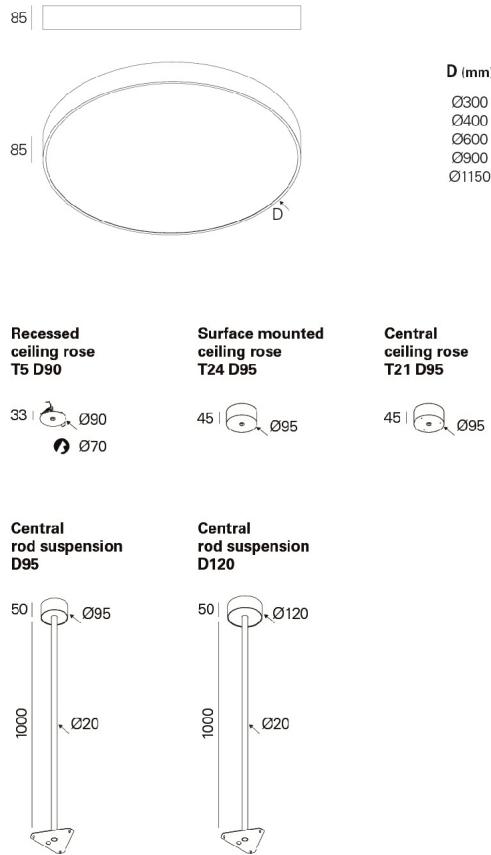

OPTIONS

Colour temperature



3000K
Tunable White

Order code
3000
T000

Ceiling rose



	Order Code
Ceiling rose	
Circular surface T24	978600
Circular recessed T5	971300
Ceiling rose (Dali with emergency kit)	
Circular surface T26	978601
Circular recessed T27	978700

• To order this option, please choose colour required to the ceiling rose

Central ceiling rose



	Order code
Central ceiling rose	
Ceiling rose T21	977211
Ceiling Central rose (Dali with emergency kit)	
Ceiling rose T28	977230

• To order this option, please choose colour required to the ceiling rose.

Suspension rod



	Order code
Suspension rod	
Ø95 mm (Ø400-600 mm)	913000
Ø120 mm (Ø900-1150 mm)	913010

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

Transparent current supply cable

Order code



Transparent current supply cable section 0,75 mm
3 x 0,75 mm
L1500
L3000
L6000
5 x 0,75 mm
L1500
L3000
L6000

940400
940401
940402
940500
940501
940507

Transparent current supply cable

Order code



Transparent current supply cable section 0,75 mm
7 x 0,75 mm
L1500
L3000
L6000

940600
940601
940602

• For dimmable Dali with emergency unit and with remote-control, it is necessary to order 2 current supply cables of 5 x 0,75 mm .

Suspension

Order Code



Suspension S10 1,5m (x3)
Suspension S10 3m (x3)
Suspension S10 6m (x3)

9111001
9111002
9111003

Emergency unit

Order Code



Emergency unit 3 hours

K3

• Prepared for Remote-control

Low output version

This option can be supplied on request



DETAILS



gCONTROL+ diffuser



LIGHT+ diffuser



Central ceiling rose



Suspended application for central ceiling rose




Recessed ceiling rose T5



Suspended application with external perpendicular suspensions



Suspended application for central ceiling rose



Recessed ceiling rose T5 with perpendicular suspensions



Central ceiling rose with internal perpendicular suspensions



Suspended rod suspension



Suspension rod




Surface ceiling rose T26




Recessed ceiling rose T27

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

PHOTOMETRY



ROFY 85 D/I
HO LIGHT+



ROFY 85 D/I
HO gCONTROL+

TO SPECIFY:

Suspended circular LED luminaire, with direct and indirect light. Powder coated extruded aluminium body, available in 16 different colours. Available in 5 diameters, 300, 400, 600, 900 and 1150mm, with opal acrylic diffuser (PMMA) for homogenous light diffusion or with microprismatic diffuser for glare control. Standard version with 4000K LED, RG1 (Photobiological Risk Group 1, according to IEC 62471), CRI>80, 80.000 lifetime (@L80, B10, Ta 25 C). Available as option in 3000K, Tunable White (2700-6500K), with dimmable DALI driver, 3h emergency unit, S10 suspension and transparent current supply cable. Possible to choose between recessed ceiling rose T5 D90 or surface mounted ceiling rose T24 D95 and central surface mounted ceiling rose T21. – as Roxo Lighting ROFY 85 D/I.

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.