

Norms: EN 60598-1, EN 60598-2-1



PRODUCT DESCRIPTION

Areas of Application: Commercial and Business areas, Public buildings, Housing, Offices, Hotel and Restaurant services, Art and Culture spaces.

Light Source: LED 4000K, CRI >80, 50.000h life.

Optical System: Diffuser: Opal polycarbonate.

Control Gear: LED driver, 220-240VAC-50/60Hz.

Materials: Body: Extruded aluminium profile.

Surface Finish: Powder coated.

DOZ - Opal polycarbonate diffuser

LED	W	Lm	Lm/W	η(%)	AxBxC (mm)	Kg	HF	DALI
	1x30	4440	101	79	875x315x88	8,1	90090.L130.E	90090.L130.H
	1x40	5920	110	82	1140x315x88	10,6	90090.L140.E	90090.L140.H
	1x50	7400	118	85	1425x315x88	12,5	90090.L150.E	90090.L150.H
	4x10	5920	115	86	590x590x88	8,9	90090.L410.E	90090.L410.H


COLOUR / FINISH

Code	Description
W	Matt white (RAL 9016)
B	Black (RAL 9005)
G	Grey (RAL 9006)
U	Blue (RAL 5002)
K	Red (RAL 3020)
V	Green (RAL 6018)
T	Yellow (RAL 1021)

OPTIONS

Code	Description
3000	Colour temperature 3000K.
910002	Suspension type "I" (x4).
910003	Suspension type "Y" (x2).
940400	1,5 m transparent current cable 3x0,75 mm ² .
940500	1,5 m transparent current cable 5x0,75 mm ² .
940600	1,5 m transparent current cable 7x0,75 mm ² .
K3	Emergency unit 3 hours.
K1	Emergency unit 1 hour.
9700	Ceiling rose.

DIMENSIONS

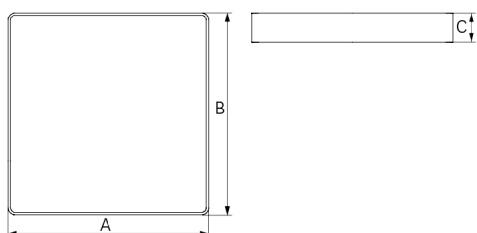

TO SPECIFY:

Surface mounted or suspended LED luminaire with aluminium body and round corners. Four sizes available with 4440/5920/7400 lumen light engine. Available in opal polycarbonate diffuser. Optional 3000K, white, grey, black, red, yellow, green or blue finish and dimmable versions – as Roxo Lighting SPA LED.

Example code for order: 90090.L130.H (DALI) + W (COLOUR/FINISH) + 3000 + 910002 + 940500 + 9700 (OPTIONS)

We reserve the right to make technical changes without prior notice.