



LED

Norms: EN 60598-1, EN 60598-2-2



PRODUCT DESCRIPTION

Areas of Application: Commercial and Business areas, Public buildings, Housing, Offices, Hotel and Restaurant services, Art and Culture spaces.

Mounting: Ceiling recessed.

Light Distribution: Direct.

Light Source: LED 4000K, CRI>80, 65.000h life (@L90, B10, Ta 25 C).

Control Gear: LED driver, 220-240VAC-50/60Hz.

Materials: Body: Steel sheet.

Surface Finish: Powder coated.

Fixing system: Brackets.

gCONTROL+ - Microprismatic polycarbonate diffuser PLUS



LED	UGR	W	lm	mA	lm/W	η(%)	AxBxC (mm)		K1	K3	kg	HF	DALI
	≤19	30	4080	300	84	62	875x315x99	860x300	•	•	6,3	90077.L130.E	90077.L130.H
	≤19	39	5440	300	89	64	1150x315x99	1125x300	•	•	8,0	90077.L140.E	90077.L140.H
	≤19	47	6800	300	94	65	1425x315x99	1410x300	•	•	9,8	90077.L150.E	90077.L150.H
	≤19	39	5440	300	86	62	590x590x99	575x575	•	•	7,4	90077.L410.E	90077.L410.H

DOZ - Opal polycarbonate diffuser



LED	UGR	W	lm	mA	lm/W	η(%)	AxBxC (mm)		K1	K3	kg	HF	DALI
	≤22	30	4080	300	92	68	875x315x99	860x300	•	•	6,3	90032.L130.E	90032.L130.H
	≤22	39	5440	300	99	71	1150x315x99	1125x300	•	•	8,0	90032.L140.E	90032.L140.H
	≤22	47	6800	300	104	72	1425x315x99	1410x300	•	•	9,8	90032.L150.E	90032.L150.H
	≤22	39	5440	300	98	70	590x590x99	575x575	•	•	7,4	90032.L410.E	90032.L410.H

COLOUR / FINISH

Code	Description
W	White
G	Grey
B	Black
U	Blue
V	Green
T	Yellow
K	Red
N	Jungle
D	Golden eye


Example code for order: 90032.L140.H (DALI) + W (COLOUR/FINISH) + 3000 + 955000 + K3 (OPTIONS)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

COLOUR / FINISH

Code	Description
O	Sahara
L	Autumn
R	Rusty chain
C	Pure chocolate
1	Mist
9	Dark rock
I	Carbon

DIMENSIONS

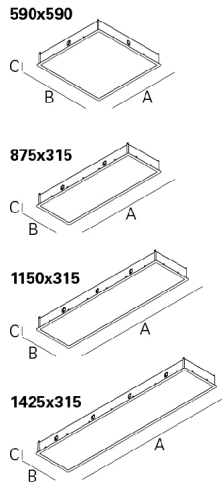

OPTIONS

Colour temperature



3000K

Order code
3000

Steel safety cable



Steel safety cable

Order code
955000

Emergency unit



Emergency unit 3 hours
Emergency unit 1 hour

- Test function by telecommand signal.


Order code
K3
K1

Low power option




Option supplied under request.

PHOTOMETRY



SPA/E LED gCONTROL+
39W (590x590mm) 4000K



SPA/E LED 39W DOZ
(590x590mm) 4000K

TO SPECIFY:

Recessed square or rectangular LED luminaire. Available in 4 sizes (875/1150/1425 x 315mm and 590x590mm) equipped with polycarbonate microprismatic gCONTROL+ or DOZ opal polycarbonate diffuser. Standard version with LED 4000K, CRI>80 and 65.000h lifetime (@L90, B10, Ta 25 C). Optional 3000K, DALI dimmable driver and 1 or 3 hours emergency unit. Available in 16 different colours – as Roxo Lighting SPA /E LED

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.