

Norms: EN 60598-1, EN 60598-2-2



PRODUCT DESCRIPTION

Areas of Application: Commercial and Business areas, Public buildings, Housing, Offices, Hotel and Restaurant services, Art and Culture spaces.

Mounting: Ceiling recessed.

Light Distribution: Direct.

Light Source: LED or Halogen lamp (GU10 or GU5.3).

Control Gear: Not included.

Materials: Body: Die cast aluminium.

Surface Finish: Powder coated.



LED		W	BEAM ↕	AxB (mm)		Kg	ORDER CODE
LED	GU10	4/5,5	40/25	Ø83x102	Ø74	0,4	90017.K100.0
LED 12V	GU5.3	7/10	24/36	Ø83x102	Ø74	0,4	90017.C100.A
HAL	GU10	max.50	20/25/40/50	Ø83x102	Ø74	0,4	90017.K100.0
HAL 12V	GU5.3	max.50	24/60	Ø83x102	Ø74	0,4	90017.C100.A


COLOUR / FINISH

Code	Description
W	White (RAL 9016)
B	Black (RAL 9005)
G	Grey (RAL 9006)
U	Blue (RAL 5002)
K	Red (RAL 3020)
V	Green (RAL 6018)
T	Yellow (RAL 1021)

OPTIONS

Code	Description
9655	12v transformer.
--	Lamps as optional.


DIMENSIONS

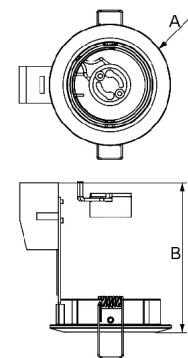

* Lamp not included.
Example code for order: 90017.C100.A (ORDER CODE) + W (COLOUR/FINISH) + 9655 (OPTIONS)

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

PHOTOMETRY



TO SPECIFY:

Round recessed adjustable single LED or halogen lamp spotlight, with white, grey, black, red, yellow, green or blue finish available. For ceiling thicknesses of 1-10mm – as Roxo Lighting SPO.

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.