

Norms: EN 60598-1, EN 60598-2-2



### PRODUCT DESCRIPTION

**Areas of Application:** Commercial and Business areas, Public buildings, Housing, Offices, Hotel and Restaurant services, Art and Culture spaces.

**Mounting:** Ceiling recessed.

**Light Distribution:** Direct.

**Light Source:** LED or Halogen lamp (GU10 or GU5.3).

**Control Gear:** Not included.

**Materials:** Body: Die cast aluminium.

**Surface Finish:** Powder coated.



LED		W	BEAM ↕	AxB (mm)		Kg	ORDER CODE
LED	GU10	4/5,5	40/25	Ø80x102	Ø74	0,3	90125.K100.0
LED 12V	GU5.3	7/10	24/36	Ø80x102	Ø74	0,3	90125.C100.A
HAL	GU10	max.50	20/25/40/50	Ø80x102	Ø74	0,3	90125.K100.0
HAL 12V	GU5.3	max.50	24/60	Ø80x102	Ø74	0,3	90125.C100.A


### COLOUR / FINISH

Code	Description
W	White (RAL 9016)
B	Black (RAL 9005)
G	Grey (RAL 9006)
U	Blue (RAL 5002)
K	Red (RAL 3020)
V	Green (RAL 6018)
T	Yellow (RAL 1021)

### OPTIONS

Code	Description
9655	12v transformer.
--	Lamps as optional

### DIMENSIONS

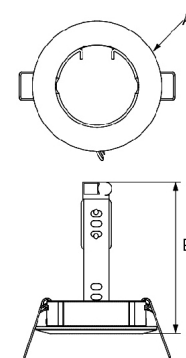


\* Lamp not included.

Example code for order: 90125.C100.A (ORDER CODE) + W (COLOUR/FINISH) + 9655 (OPTIONS)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

## PHOTOMETRY



### TO SPECIFY:

Round recessed fixed single LED or halogen lamp spotlight, with white, grey, black, red, yellow, green or blue finish available. For ceiling thicknesses of 1-10mm – as Roxo Lighting SPO F.

We reserve the right to make technical changes without prior notice.  
Electrical/Optical data are subjected to a tolerance of +/-10%.