



Norms: EN 60598-1, EN 60598-2-1



**PRODUCT DESCRIPTION**

**Areas of Application:** Commercial and Business areas, Public buildings, Housing, Offices, Hotel and Restaurant services, Art and Culture spaces.

**Mounting:** Surface/Suspended.

**Light Distribution:** Direct.

**Light Source:** T5 (G5) lamp.

**Control Gear:** Electronic equipment, 220-240VAC-50/60Hz. 12V transformer included for G53.

**Materials:** Body: Extruded aluminium profile.

**Surface Finish:** Powder coated.

DOP - Opal polycarbonate diffuser (Body)

	LAMP*	Lamp	W	AxBxC (mm)	HF	DSI	DALI
	T5	G5	2x28	1474x157x85	90080.P228.A	90080.P228.C	90080.P228.D
		G5	2x35	1774x157x85	90080.P235.A	90080.P235.C	90080.P235.D
		G5	2x49	1774x157x85	90080.P249.A	90080.P249.C	90080.P249.D
		G5	2x54	1474x157x85	90080.P254.A	90080.P254.C	90080.P254.D

Spot

	LAMP*	Lamp	W	AxBxC (mm)	HF	DSI	DALI
	LED 12V	G53	10/15	--	90080.U112.I	--	--
	HAL 12V	G53	45/60	--	90080.U100.I	--	--
	CDM-R111	GX8.5	35	--	90080.A135.A	--	--
		GX8.5	70	--	90080.A170.A	--	--

Please note:  
To complete the luminaire SPOT order code will be necessary.

**COLOUR / FINISH**

Code	Description
B	Black (RAL 9005)
G	Grey (RAL 9006)

**OPTIONS**

Code	Description
910002	Suspension Type "I" (x4)
910003	Suspension Type "Y" (x2)
970002	Ceiling rose
K3	Emergency unit 3 hours
K1	Emergency unit 1 hour
--	Lamps as optional

\*Lamp not included.  
Example code for order: 90080.P228.D (BODY DALI) + (2x) 90080.A135.A (SPOT) + 910002 + 970002 (OPTIONS)

We reserve the right to make technical changes without prior notice.  
Electrical/Optical data are subjected to a tolerance of +/-10%.

**DETAILS**




Suspension Type "I"



Suspension Type "Y"

**DIMENSIONS**

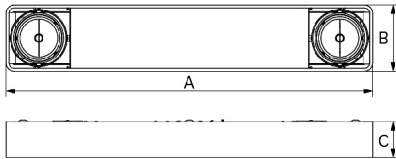

**TO SPECIFY:**

Suspended architectural T5(G5) luminaire combined with LED/Halogen/Metal halide spotlights. Extruded aluminium profile powder coated with opal polycarbonate diffuser - as Roxo Lighting STS.