

Norms: EN 60598-1, EN 60598-2-2



PRODUCT DESCRIPTION

Areas of Application: Commercial and Business areas, Public buildings, Housing, Offices, Hotel and Restaurant services, Art and Culture spaces.

Mounting: Ceiling recessed.

Light Distribution: Direct.

Light Source: T5 (G5) lamp.

Control Gear: Electronic equipment, 220-240VAC-50/60Hz.

Materials: Body: Extruded aluminium profile.

Surface Finish: Anodised in natural colour.

Fixing system: Brackets.





PB - Polished double parabolic louvre | T0 (Trimless version)

| | LAMP* | UGR | W | η(%) | AxBxC (mm) | | K1 | K3 | Kg | HF | DSI | DALI |
|--|-------|-----|------|------|------------|---------|----|----|-----|----------------|----------------|----------------|
| | T5 | ≤19 | 1x14 | 76 | 591x90x98 | 592x91 | - | - | 2,8 | 9ACZ.114.79.A4 | 9ACZ.114.79.84 | 9ACZ.114.79.74 |
| | | ≤19 | 1x21 | 79 | 891x90x98 | 892x91 | - | - | 3,9 | 9ACZ.121.79.A4 | 9ACZ.121.79.84 | 9ACZ.121.79.74 |
| | | ≤19 | 1x24 | 85 | 591x90x98 | 592x91 | - | - | 2,8 | 9ACZ.124.79.A4 | 9ACZ.124.79.84 | 9ACZ.124.79.74 |
| | | ≤19 | 1x28 | 79 | 1191x90x98 | 1192x91 | - | - | 5 | 9ACZ.128.79.A4 | 9ACZ.128.79.84 | 9ACZ.128.79.74 |
| | | ≤19 | 1x35 | 84 | 1491x90x98 | 1492x91 | • | • | 6,4 | 9ACZ.114.79.A4 | 9ACZ.114.79.84 | 9ACZ.114.79.74 |
| | | ≤19 | 1x39 | 76 | 891x90x98 | 892x91 | - | - | 3,9 | 9ACZ.139.79.A4 | 9ACZ.139.79.84 | 9ACZ.139.79.74 |
| | | ≤19 | 1x49 | 81 | 1491x90x98 | 1492x91 | • | • | 6,4 | 9ACZ.149.79.A4 | 9ACZ.149.79.84 | 9ACZ.149.79.74 |
| | | ≤19 | 1x54 | 76 | 1191x90x98 | 1192x91 | - | - | 5 | 9ACZ.154.79.A4 | 9ACZ.154.79.84 | 9ACZ.154.79.74 |
| | | ≤22 | 1x80 | 87 | 1491x90x98 | 1492x91 | • | • | 6,4 | 9ACZ.180.79.A4 | 9ACZ.180.79.84 | 9ACZ.180.79.74 |
| | | ≤19 | 2x21 | 70 | 891x90x98 | 892x91 | - | - | 4,3 | 9ACZ.221.79.A4 | 9ACZ.221.79.84 | 9ACZ.221.79.74 |
| | | ≤19 | 2x28 | 72 | 1191x90x98 | 1192x91 | - | - | 5,5 | 9ACZ.228.79.A4 | 9ACZ.228.79.84 | 9ACZ.228.79.74 |
| | | ≤22 | 2x35 | 74 | 1491x90x98 | 1492x91 | - | - | 6,9 | 9ACZ.235.79.A4 | 9ACZ.235.79.84 | 9ACZ.235.79.74 |
| | | ≤22 | 2x39 | 66 | 891x90x98 | 892x91 | - | - | 4,3 | 9ACZ.239.79.A4 | 9ACZ.239.79.84 | 9ACZ.239.79.74 |
| | | ≤22 | 2x49 | 76 | 1491x90x98 | 1492x91 | • | • | 6,9 | 9ACZ.249.79.A4 | 9ACZ.249.79.84 | 9ACZ.249.79.74 |
| | | ≤22 | 2x54 | 71 | 1191x90x98 | 1192x91 | - | - | 5,5 | 9ACZ.254.79.A4 | 9ACZ.254.79.84 | 9ACZ.254.79.74 |



*Lamp not included.
Example code for order: 9ACZ.180.79.74 (DALI)

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

PM - Satin double parabolic louvre | T0 (Trimless version)

| LAMP* | UGR | W | η(%) | AxBxC (mm) |  | K1 | K3 | Kg | HF | DSI | DALI |
|---|-----|------|------|------------|---|----|----|-----|----------------|----------------|----------------|
|  T5 | ≤19 | 1x14 | 65 | 591x90x98 | 592x91 | - | - | 2,8 | 9ACZ.114.93.A4 | 9ACZ.114.93.84 | 9ACZ.114.93.74 |
| | ≤19 | 1x21 | 69 | 891x90x98 | 892x91 | - | - | 3,9 | 9ACZ.121.93.A4 | 9ACZ.121.93.84 | 9ACZ.121.93.74 |
| | ≤19 | 1x24 | 73 | 591x90x98 | 592x91 | - | - | 2,8 | 9ACZ.124.93.A4 | 9ACZ.124.93.84 | 9ACZ.124.93.74 |
| | ≤19 | 1x28 | 69 | 1191x90x98 | 1192x91 | - | - | 5 | 9ACZ.128.93.A4 | 9ACZ.128.93.84 | 9ACZ.128.93.74 |
| | ≤19 | 1x35 | 71 | 1491x90x98 | 1492x91 | • | • | 6,4 | 9ACZ.114.93.A4 | 9ACZ.114.93.84 | 9ACZ.114.93.74 |
| | ≤19 | 1x39 | 61 | 891x90x98 | 892x91 | - | - | 3,9 | 9ACZ.139.93.A4 | 9ACZ.139.93.84 | 9ACZ.139.93.74 |
| | ≤19 | 1x49 | 73 | 1491x90x98 | 1492x91 | • | • | 6,4 | 9ACZ.149.93.A4 | 9ACZ.149.93.84 | 9ACZ.149.93.74 |
| | ≤19 | 1x54 | 68 | 1191x90x98 | 1192x91 | - | - | 5 | 9ACZ.154.93.A4 | 9ACZ.154.93.84 | 9ACZ.154.93.74 |
| | ≤19 | 1x80 | 75 | 1491x90x98 | 1492x91 | • | • | 6,4 | 9ACZ.180.93.A4 | 9ACZ.180.93.84 | 9ACZ.180.93.74 |
| | ≤19 | 2x21 | 62 | 891x90x98 | 892x91 | - | - | 4,3 | 9ACZ.221.93.A4 | 9ACZ.221.93.84 | 9ACZ.221.93.74 |
| | ≤19 | 2x28 | 63 | 1191x90x98 | 1192x91 | - | - | 5,5 | 9ACZ.228.93.A4 | 9ACZ.228.93.84 | 9ACZ.228.93.74 |
| | ≤19 | 2x35 | 62 | 1491x90x98 | 1492x91 | - | - | 6,9 | 9ACZ.235.93.A4 | 9ACZ.235.93.84 | 9ACZ.235.93.74 |
| | ≤22 | 2x39 | 56 | 891x90x98 | 892x91 | - | - | 4,3 | 9ACZ.239.93.A4 | 9ACZ.239.93.84 | 9ACZ.239.93.74 |
| | ≤22 | 2x49 | 62 | 1491x90x98 | 1492x91 | • | • | 6,9 | 9ACZ.249.93.A4 | 9ACZ.249.93.84 | 9ACZ.249.93.74 |
| | ≤22 | 2x54 | 57 | 1191x90x98 | 1192x91 | - | - | 5,5 | 9ACZ.254.93.A4 | 9ACZ.254.93.84 | 9ACZ.254.93.74 |

BLINE - Opal polycarbonate diffuser | T0 (Trimless version)


| LAMP* | UGR | W | η(%) | AxBxC (mm) |  | K1 | K3 | Kg | HF | DSI | DALI |
|---|-----|------|------|------------|---|----|----|-----|----------------|----------------|----------------|
|  T5 | ≤19 | 1x14 | 42 | 591x90x98 | 592x91 | - | - | 2,8 | 9ACZ.114.20.A4 | 9ACZ.114.20.84 | 9ACZ.114.20.74 |
| | ≤19 | 1x21 | 44 | 891x90x98 | 892x91 | - | - | 3,9 | 9ACZ.121.20.A4 | 9ACZ.121.20.84 | 9ACZ.121.20.74 |
| | ≤19 | 1x24 | 46 | 591x90x98 | 592x91 | - | - | 2,8 | 9ACZ.124.20.A4 | 9ACZ.124.20.84 | 9ACZ.124.20.74 |
| | ≤19 | 1x28 | 44 | 1191x90x98 | 1192x91 | - | - | 5 | 9ACZ.128.20.A4 | 9ACZ.128.20.84 | 9ACZ.128.20.74 |
| | ≤19 | 1x35 | 45 | 1491x90x98 | 1492x91 | • | • | 6,4 | 9ACZ.114.20.A4 | 9ACZ.114.20.84 | 9ACZ.114.20.74 |
| | ≤19 | 1x39 | 41 | 891x90x98 | 892x91 | - | - | 3,9 | 9ACZ.139.20.A4 | 9ACZ.139.20.84 | 9ACZ.139.20.74 |
| | ≤19 | 1x49 | 46 | 1491x90x98 | 1492x91 | • | • | 6,4 | 9ACZ.149.20.A4 | 9ACZ.149.20.84 | 9ACZ.149.20.74 |
| | ≤19 | 1x54 | 40 | 1191x90x98 | 1192x91 | - | - | 5 | 9ACZ.154.20.A4 | 9ACZ.154.20.84 | 9ACZ.154.20.74 |
| | ≤22 | 1x80 | 49 | 1491x90x98 | 1492x91 | • | • | 6,4 | 9ACZ.180.20.A4 | 9ACZ.180.20.84 | 9ACZ.180.20.74 |
| | ≤22 | 2x21 | 40 | 891x90x98 | 892x91 | - | - | 4,3 | 9ACZ.221.20.A4 | 9ACZ.221.20.84 | 9ACZ.221.20.74 |
| | ≤22 | 2x28 | 43 | 1191x90x98 | 1192x91 | - | - | 5,5 | 9ACZ.228.20.A4 | 9ACZ.228.20.84 | 9ACZ.228.20.74 |
| | ≤22 | 2x35 | 44 | 1491x90x98 | 1492x91 | - | - | 6,9 | 9ACZ.235.20.A4 | 9ACZ.235.20.84 | 9ACZ.235.20.74 |
| | ≤22 | 2x39 | 39 | 891x90x98 | 892x91 | - | - | 4,3 | 9ACZ.239.20.A4 | 9ACZ.239.20.84 | 9ACZ.239.20.74 |
| | ≤22 | 2x49 | 48 | 1491x90x98 | 1492x91 | • | • | 6,9 | 9ACZ.249.20.A4 | 9ACZ.249.20.84 | 9ACZ.249.20.74 |
| | ≤22 | 2x54 | 38 | 1191x90x98 | 1192x91 | - | - | 5,5 | 9ACZ.254.20.A4 | 9ACZ.254.20.84 | 9ACZ.254.20.74 |

COLOUR / FINISH

| Code | Description |
|------|------------------|
| W | White (RAL 9016) |
| B | Black (RAL 9005) |

OPTIONS

Application type



T1 (Trim version)

• Additional "L" bracket.

Please note:
This option can be supplied on request.

Order code
9853

Emergency unit




Emergency unit 3 hours
Emergency unit 1 hour

Order code
K3
K1


We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

PHOTOMETRY


TCH / E 1x80W BLINE
Lamp: 1 x 80W/B40 HO



DIMENSIONS

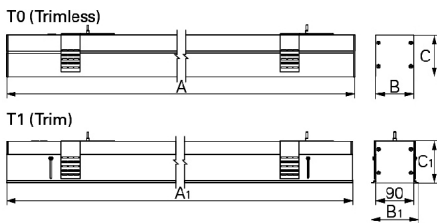

RECESSED DIMENSIONS



T1 (Trim)

| W | A1xB1xC1 (mm) | ⚠ |
|------|---------------|----------|
| 1x14 | 591x112x98 | 592x105 |
| 1x21 | 891x112x98 | 892x105 |
| 1x24 | 591x112x98 | 592x105 |
| 1x28 | 1191x112x98 | 1192x105 |
| 1x35 | 1491x112x98 | 1492x105 |
| 1x39 | 891x112x98 | 892x105 |
| 1x49 | 1491x112x98 | 1492x105 |
| 1x54 | 1191x112x98 | 1192x105 |
| 1x80 | 1491x112x98 | 1492x105 |
| 2x21 | 891x112x98 | 892x105 |
| 2x28 | 1191x112x98 | 1192x105 |
| 2x35 | 1491x112x98 | 1492x105 |
| 2x39 | 891x112x98 | 892x105 |
| 2x49 | 1491x112x98 | 1492x105 |
| 2x54 | 1191x112x98 | 1192x105 |

TO SPECIFY:

Trimless linear recessed T5(G5) luminaire, individually mounted with 90mm width extruded aluminium profile, anodised in natural colour. Aluminium end caps and PB/PM louvre or BLINE polycarbonate diffuser. Available with HF, DSI or DALI control gear. Optional 1 or 3 hours emergency and trim version – as Roxo Lighting TCH / E.

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.