

Norms: EN 60598-1, EN 60598-2-2



PRODUCT DESCRIPTION

Areas of Application: Commercial and Business areas, Public buildings, Offices, Schools, Corridors.


Mounting: Ceiling recessed.

Light Distribution: Direct.


Control Gear: Electronic equipment, 220-240VAC-50/60Hz.

Materials: Body: Steel sheet.

Surface Finish: Powder coated in white matt (RAL9016).

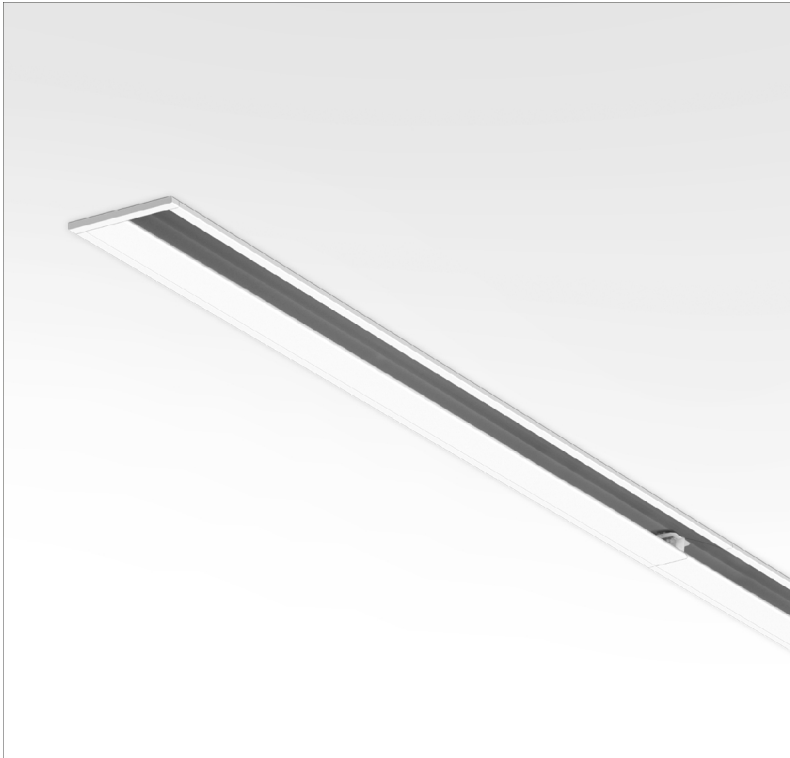

RAM - Asymmetric satin aluminium reflector (middle)

| LAMP* | W | AxBxC (mm) | ⓘ | HF | DSI | DALI |
|--|------|-------------|---------|----------------|----------------|----------------|
|  | 1x14 | 576x100x56 | 576x85 | 9A5P.114.0C.A4 | 9A5P.114.0C.84 | 9A5P.114.0C.74 |
| | 1x24 | 576x100x56 | 576x85 | 9A5P.124.0C.A4 | 9A5P.124.0C.84 | 9A5P.124.0C.74 |
| | 1x28 | 1176x100x56 | 1176x85 | 9A5P.128.0C.A4 | 9A5P.128.0C.84 | 9A5P.128.0C.74 |
| | 1x35 | 1476x100x56 | 1476x85 | 9A5P.135.0C.A4 | 9A5P.135.0C.84 | 9A5P.135.0C.74 |
| | 1x49 | 1476x100x56 | 1502x85 | 9A5P.149.0C.A4 | 9A5P.149.0C.84 | 9A5P.149.0C.74 |
| | 1x54 | 1176x100x56 | 1202x85 | 9A5P.154.0C.A4 | 9A5P.154.0C.84 | 9A5P.154.0C.74 |
| | 1x80 | 1476x100x56 | 1502x85 | 9A5P.180.0C.A4 | 9A5P.180.0C.84 | 9A5P.180.0C.74 |

Please note:
To complete a line, start kit will be necessary. Please order separately.
Recessed dimensions without end caps, add 14 mm to complete the line. 14/24 W version only available as and part of the line.

OPTIONS

| Start Kit | Order code | Through-wiring | Order code |
|---|------------|------------------------|------------|
|  <p>Start Kit</p> <ul style="list-style-type: none"> • 2 end caps and one cable lock, includes screws. | 920100 | 1,5 mm2 through-wiring | |
| | | 3 x 1,5 mm2 | 9462 |
| | | 5 x 1,5 mm2 | 9467 |
| | | 2,5 mm2 through-wiring | |
| | | 3 x 2,5 mm2 | 9464 |
| | | 5 x 2,5 mm2 | 9465 |

* Lamp not included.
Example code for order: (3x) 9A5P.128.0C.74 (DALI) + 920100 + (2x) 9467 (OPTIONS)



We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

Lamps as optional




Please note:
This option can be supplied on request.

PHOTOMETRY



DIMENSIONS

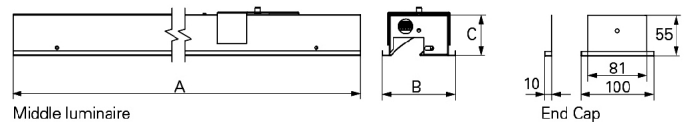

TO SPECIFY:

Recessed asymmetric luminaire for continuous line with satin aluminium reflector.
For single fluorescent 14/24/28/35/49/54/80W T5(G5) lamp. Suitable for pull up version with brackets – as Indelague TEA Line.

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.