

Norms: EN 60598-1, EN 60598-2-2



PRODUCT DESCRIPTION

Areas of Application: Commercial and Business areas, Public buildings, Offices, Schools, Corridors.


Mounting: Ceiling recessed.

Light Distribution: Direct.

Control Gear: Electronic equipment, 220-240VAC-50/60Hz.

Materials: Body: Steel sheet.

Surface Finish: Powder coated in white matt (RAL9016).

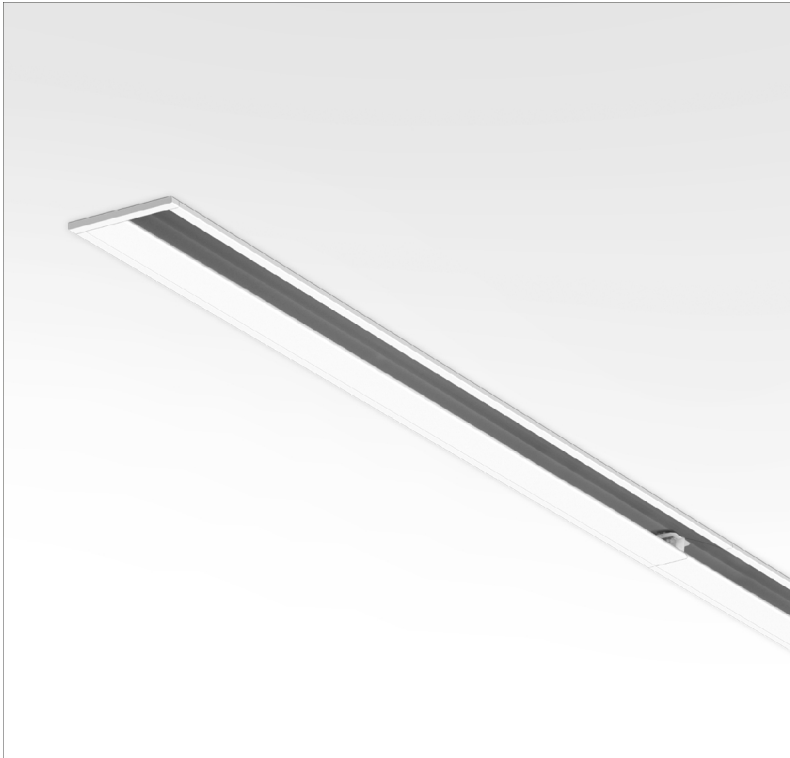

RAM - Asymmetric satin aluminium reflector (middle)

LAMP*	W	AxBxC (mm)	RAM	HF	DSI	DALI
	1x14	576x100x56	576x85	9A5P.114.0C.A4	9A5P.114.0C.84	9A5P.114.0C.74
	1x24	576x100x56	576x85	9A5P.124.0C.A4	9A5P.124.0C.84	9A5P.124.0C.74
	1x28	1176x100x56	1176x85	9A5P.128.0C.A4	9A5P.128.0C.84	9A5P.128.0C.74
	1x35	1476x100x56	1476x85	9A5P.135.0C.A4	9A5P.135.0C.84	9A5P.135.0C.74
	1x49	1476x100x56	1502x85	9A5P.149.0C.A4	9A5P.149.0C.84	9A5P.149.0C.74
	1x54	1176x100x56	1202x85	9A5P.154.0C.A4	9A5P.154.0C.84	9A5P.154.0C.74
	1x80	1476x100x56	1502x85	9A5P.180.0C.A4	9A5P.180.0C.84	9A5P.180.0C.74

Please note:
To complete a line, start kit will be necessary. Please order separately.
Recessed dimensions without end caps, add 14 mm to complete the line. 14/24 W version only available as and part of the line.

OPTIONS

Start Kit	Order code	Through-wiring	Order code
<p>Start Kit</p> <ul style="list-style-type: none"> • 2 end caps and one cable lock, includes screws. 	920100	1,5 mm2 through-wiring	
		3 x 1,5 mm2	9462
		5 x 1,5 mm2	9467
		2,5 mm2 through-wiring	
		3 x 2,5 mm2	9464
		5 x 2,5 mm2	9465

* Lamp not included.
Example code for order: (3x) 9A5P.128.0C.74 (DALI) + 920100 + (2x) 9467 (OPTIONS)



We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

Lamps as optional




Please note:
This option can be supplied on request.

PHOTOMETRY



DIMENSIONS

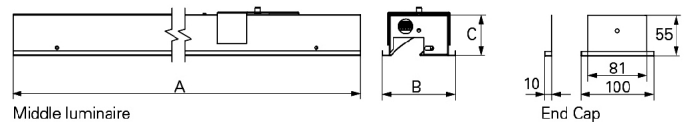

TO SPECIFY:

Recessed asymmetric luminaire for continuous line with satin aluminium reflector.
For single fluorescent 14/24/28/35/49/54/80W T5(G5) lamp. Suitable for pull up version with brackets – as Roxo Lighting TEA Line.

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.