

LED



Norms: EN 60598-1, EN 60598-2-1

CE IP65 IK10 850°C 230V/50Hz

PRODUCT DESCRIPTION

Areas of Application: Police stations, detention centres, public spaces, psychiatric hospitals, schools.

Mounting: Ceiling/Wall Surface.

Light Distribution: Direct.

Light Source: LED 4000K, CRI>80, 50.000h life.

Optical System: Diffuser: 3mm polycarbonate.

Control Gear: LED driver, 220-240VAC-50/60Hz.

Materials: Body: Steel sheet.
Frame: Extruded aluminium.

Surface Finish: Powder coated in white matt (RAL9016).


DOZ - Opal polycarbonate diffuser

LED	W	Lm	AxBxC (mm)	HF	DALI
	2x22	6000	1260x175x175	903S.222.2J.F4	903S.222.2J.E4
	2x27	7500	1560x175x175	903S.227.2J.F4	903S.227.2J.E4

OPTIONS

Code	Description
3000	Colour temperature 3000K.
K3	Emergency unit 3 hours.
K1	Emergency unit 1 hour.

DIMENSIONS

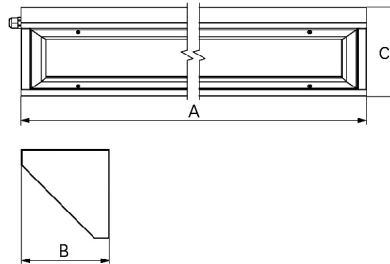

TO SPECIFY:

Ceiling/Wall mounted LED IP65 sealed luminaire with 6000/7500 lumen light engine. Aluminium frame with tamperproof screws and opal polycarbonate diffuser designed to resist extreme physical impact (IK10). Optional 1 or 3 hours emergency – as Roxo Lighting TLP /C LED.

Example code for order: 903S.222.2J.E4 (DALI) + 3000 (OPTIONS)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.