

Norms: EN 60598-1, EN 60598-2-1



**PRODUCT DESCRIPTION**

**Areas of Application:** Commercial and Business areas, Public buildings, Housing, Offices, Hotel and Restaurant services, Art and Culture spaces.


**Mounting:** Wall Mounted.

**Light Distribution:** Direct/Indirect.

**Light Source:** QT-14 (G9) lamp.

**Materials:** Body: Steel sheet.

**Surface Finish:** Powder coated.

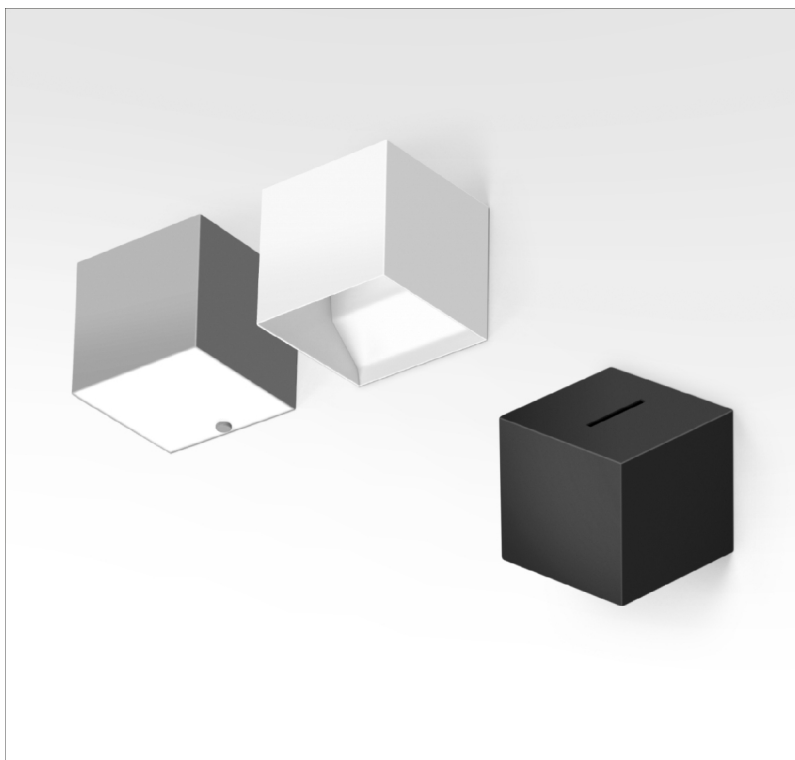

Direct/Indirect 90 +90 beam angle

	LAMP*		W	AxBxC (mm)	Kg	ORDER CODE
	QT-14	G9	max.60	110x110x110	0,8	90028.S160.0.0090

Direct/Indirect 90 +5 beam angle

	LAMP*		W	AxBxC (mm)	Kg	ORDER CODE
	QT-14	G9	max.60	110x110x110	0,8	90028.S160.0.0005

**COLOUR / FINISH**

Code	Description
W	White (RAL 9016)
B	Black (RAL 9005)
G	Grey (RAL 9006)
U	Blue (RAL 5002)
K	Red (RAL 3020)
V	Green (RAL 6018)
T	Yellow (RAL 1021)

**OPTIONS**

Code	Description
3000	Colour temperature 3000K.

**DETAILS**




Opal polycarbonate diffuser detail.

\* Lamp not included.

Example code for order: 90028.S160.0.0090 (ORDER CODE) + W (COLOUR/FINISH) + 003 (OPTIONS)


We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

**DIMENSIONS**



**TO SPECIFY:**

Wall mounted direct/indirect luminaire, suitable for halogen lamps, with different light beam effect on walls. Optional opal polycarbonate diffuser and white, grey, black, red, yellow, green or blue finish - as Indelague VISA.



We reserve the right to make technical changes without prior notice.  
Electrical/Optical data are subjected to a tolerance of +/-10%.