

Norms: EN 60598-1, EN 60598-2-1



PRODUCT DESCRIPTION

Areas of Application: Commercial and Business areas, Public buildings, Housing, Offices, Hotel and Restaurant services, Art and Culture spaces.


Mounting: Wall Mounted.

Light Distribution: Direct/Indirect.

Light Source: QT-14 (G9) lamp.

Materials: Body: Steel sheet.

Surface Finish: Powder coated.

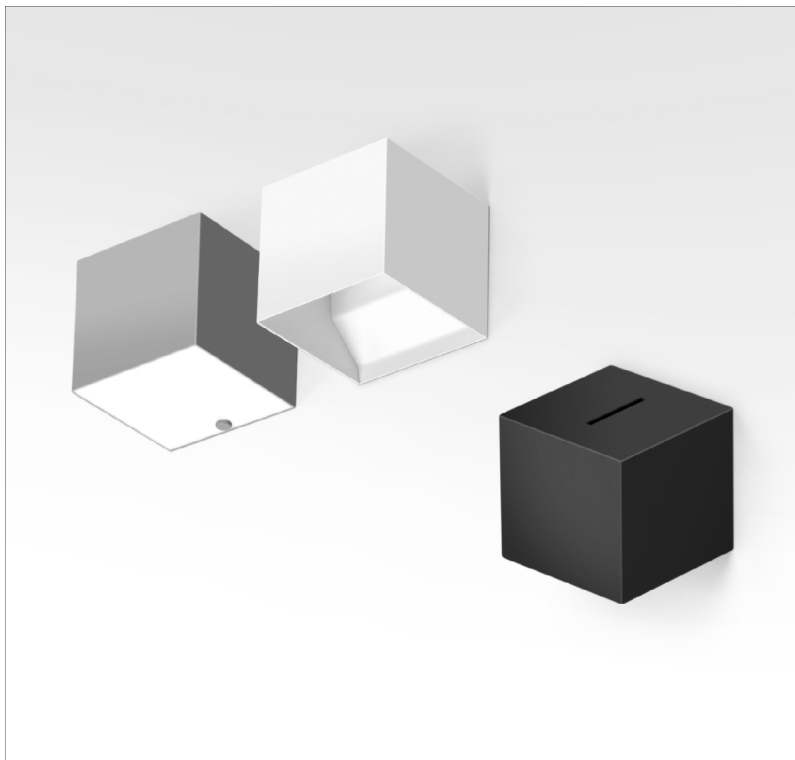

Direct/Indirect 90 +90 beam angle

	LAMP*		W	AxBxC (mm)	Kg	ORDER CODE
	QT-14		max.60	110x110x110	0,8	90028.S160.0.0090

Direct/Indirect 90 +5 beam angle

	LAMP*		W	AxBxC (mm)	Kg	ORDER CODE
	QT-14		max.60	110x110x110	0,8	90028.S160.0.0005

COLOUR / FINISH

Code	Description
W	White (RAL 9016)
B	Black (RAL 9005)
G	Grey (RAL 9006)
U	Blue (RAL 5002)
K	Red (RAL 3020)
V	Green (RAL 6018)
T	Yellow (RAL 1021)

OPTIONS

Code	Description
3000	Colour temperature 3000K.

DETAILS




Opal polycarbonate diffuser detail.

* Lamp not included.

Example code for order: 90028.S160.0.0090 (ORDER CODE) + W (COLOUR/FINISH) + 003 (OPTIONS)


We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

DIMENSIONS



TO SPECIFY:

Wall mounted direct/indirect luminaire, suitable for halogen lamps, with different light beam effect on walls. Optional opal polycarbonate diffuser and white, grey, black, red, yellow, green or blue finish - as Roxo Lighting VISA.



We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.