



**LED**

Norms: EN 60598-1, EN 60598-2-1



230V/50Hz

**PRODUCT DESCRIPTION**

**Areas of Application:** Public buildings, Housing, Offices, Hotel and Restaurant services, Art and Culture spaces.

**Mounting:** Suspended.

**Light Distribution:** Direct.

**Light Source:** LED 4000K, RG1, CRI>90, MacAdam Step <3, 65.000h life (@L90, B10, Ta 25 C).

**Optical System:** Reflector: Polished aluminium.

**Control Gear:** LED driver, 220-240VAC-50/60Hz.

**Materials:** Body: Steel sheet and extruded aluminium tube.

**Surface Finish:** Powder coated epoxy polyester.

PB - Polished aluminium reflector | 35° Beam angle



UGR	W	Lm	Lm/W	Kg	HF	DALI
≤19	10	1161	116	1,2	90563.L001.E.0035	90563.L001.H.0035
≤22	14	1574	112	1,2	90650.L001.E.0035	90650.L001.H.0035

PB - Polished reflector - 60°




UGR	W	Lm	Lm/W	Kg	HF	DALI
≤22	10	1161	116	1,2	90563.L001.E.0060	90563.L001.H.0060
≤25	14	1574	112	1,2	90650.L001.E.0060	90650.L001.H.0060

**COLOUR / FINISH**

Code	Description
<input type="checkbox"/> W	White
<input type="checkbox"/> G	Grey
<input type="checkbox"/> B	Black

**DETAILS**



Front view


We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

## OPTIONS


### Colour temperature

	Order code
 <p>3000K</p>	<b>3000</b>


### Suspension

	Order code
 <p>Suspension Type "I" 1,5m (x3)</p>	<b>911100</b>
Suspension Type "I" 3m (x3)	<b>9111003MT</b>


### Suspension kit

	Order code
 <p>Suspension Kit Surface mounted T25 Q100 Recessed T7 Q90</p> <p>• To order this option you must indicate the desired colour</p>	<b>978610</b> <b>971400</b>


### Current supply cable

	Order code
 <p>1,5 m transparent cable 0,75 mm2 3 x 0,75 mm2 5 x 0,75 mm2</p>	<b>940400</b> <b>940500</b>

## PHOTOMETRY

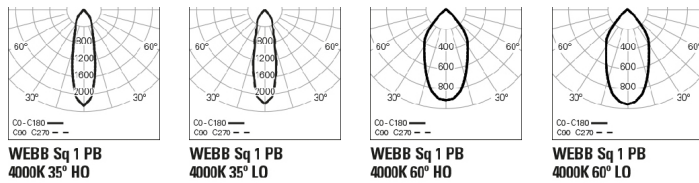

## DIMENSIONS



### TO SPECIFY:

Square LED luminaire, 195x195mm, with adjustable downlight for suspended application. Possibility of 35° and 60° reflector for different light projection. Steel sheet and aluminium body, powder-coated with epoxy polyester, available in white, gray and black colours. Flux of 1574Lm in HO version and 1161Lm in LO version. LED with 116Lm/W efficacy. Standard version with 4000K LED, CRI >90, MacAdam Step <3 and 65.000h lifetime (@L90, B10, Ta 25 C). DALI dimming and 3000K available as options. - as Indelague WEBB SQ 1

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.