



LED

Norms: EN 60598-1, EN 60598-2-1



230V/50Hz

PRODUCT DESCRIPTION

Areas of Application: Public buildings, Housing, Offices, Hotel and Restaurant services, Art and Culture spaces.

Mounting: Suspended.

Light Distribution: Direct.

Light Source: LED 4000K, RG1, CRI>90, MacAdam Step <3, 65.000h life (@L90, B10, Ta 25 C).

Optical System: Reflector: Polished aluminium.

Control Gear: LED driver, 220-240VAC-50/60Hz.

Materials: Body: Steel sheet and extruded aluminium tube.

Surface Finish: Powder coated epoxy polyester.

PB - Polished aluminium reflector | 35° Beam angle

	UGR	W	Lm	Lm/W	Kg	HF	DALI
	≤19	10	1161	116	1,2	90563.L001.E.0035	90563.L001.H.0035
	≤22	14	1574	112	1,2	90650.L001.E.0035	90650.L001.H.0035


PB - Polished reflector - 60°

	UGR	W	Lm	Lm/W	Kg	HF	DALI
	≤22	10	1161	116	1,2	90563.L001.E.0060	90563.L001.H.0060
	≤25	14	1574	112	1,2	90650.L001.E.0060	90650.L001.H.0060

COLOUR / FINISH

Code	Description
<input type="checkbox"/> W	White
<input type="checkbox"/> G	Grey
<input checked="" type="checkbox"/> B	Black

DETAILS



Front view


We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

OPTIONS


Colour temperature

	Order code
 <p>3000K</p>	3000

Suspension


	Order code
 <p>Suspension Type "1" 1,5m (x3)</p>	911100
<p>Suspension Type "1" 3m (x3)</p>	9111003MT

Suspension kit


	Order code
 <p>Suspension Kit Surface mounted T25 Q100</p>	978610
<p>Recessed T7 Q90</p>	971400

• To order this option you must indicate the desired colour


Current supply cable

	Order code
 <p>1,5 m transparent cable 0,75 mm2</p>	
<p>3 x 0,75 mm2</p>	940400
<p>5 x 0,75 mm2</p>	940500

PHOTOMETRY

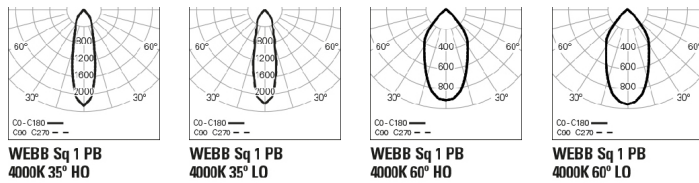

DIMENSIONS



TO SPECIFY:

Square LED luminaire, 195x195mm, with adjustable downlight for suspended application. Possibility of 35° and 60° reflector for different light projection. Steel sheet and aluminium body, powder-coated with epoxy polyester, available in white, gray and black colours. Flux of 1574Lm in HO version and 1161Lm in LO version. LED with 116Lm/W efficacy. Standard version with 4000K LED, CRI >90, MacAdam Step <3 and 65.000h lifetime (@L90, B10, Ta 25 C). DALI dimming and 3000K available as options. - as Roxo Lighting WEBB SQ 1

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.