



LED

Norms: EN 60598-1, EN 60598-2-1



230V/50Hz

PRODUCT DESCRIPTION

Areas of Application: Public buildings, Housing, Offices, Hotel and Restaurant services, Art and Culture spaces.

Mounting: Suspended.

Light Distribution: Direct.

Light Source: LED 4000K, RG1, CRI>90, MacAdam Step <3, 65.000h life (@L90, B10, Ta 25 C).

Optical System: Reflector: Polished aluminium.

Control Gear: LED driver, 220-240VAC-50/60Hz.

Materials: Body: Steel sheet and extruded aluminium tube.

Surface Finish: Powder coated epoxy polyester.

PB - Polished aluminium reflector | 35° Beam angle



UGR	W	Lm	Lm/W	Kg	HF	DALI
≤19	20	2322	116	2,0	90563.L002.E.0035	90563.L002.H.0035
≤22	28	3148	112	2,0	90650.L002.E.0035	90650.L002.H.0035

PB - Polished reflector - 60°




UGR	W	Lm	Lm/W	Kg	HF	DALI
≤22	20	2322	116	2,0	90563.L002.E.0060	90563.L002.H.0060
≤25	28	3148	112	2,0	90650.L002.E.0060	90650.L002.H.0060

COLOUR / FINISH

Code	Description
□ W	White
■ G	Grey
■ B	Black

DETAILS



Front view


We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

OPTIONS


Colour temperature

	3000K	Order code 3000
--	-------	---------------------------


Suspension

	Suspension Type "1" 1,5m (x3) Suspension Type "1" 3m (x3)	Order code 911100 9111003MT
---	--	---


Suspension kit

	Suspension Kit Surface mounted T25 Q100 Recessed T7 Q90	Order code 978610 971400
• To order this option you must indicate the desired colour		


Current supply cable

	1,5 m transparent cable 0,75 mm2 3 x 0,75 mm2 5 x 0,75 mm2	Order code 940400 940500
---	--	--

PHOTOMETRY

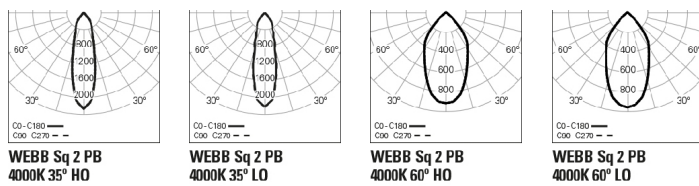

DIMENSIONS



TO SPECIFY:

Rectangular LED luminaire, 345x195mm, with two adjustable downlights for suspended application. Possibility of 35° and 60° reflector for different light projection. Steel sheet and aluminium body, powder-coated with epoxy polyester, available in white, gray and black colours. Flux of 3148Lm in HO version and 2700Lm in LO version. LED with 116Lm/W efficacy. Standard version with 4000K LED, CRI >90, MacAdam Step <3 and 65.000h lifetime (@L90, B10, Ta 25 C). DALI dimming and 3000K available as options. - as Indelague WEBB SQ 2

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.